


Picture Light

We choose art or a picture for the love of a piece or to adorn a wall. Specialty believes these works should be shown in the best light possible. The high CRI light source renders the items true while eliminating UV helping the piece maintain its original state. Featuring a multitude of material and finishes, our elegant fixtures are made of tubular extrusions with welded and finished end caps, allowing the fixture to blend with the beauty and refinement of the piece.

B- J-Box Mounted with Friction Swivel

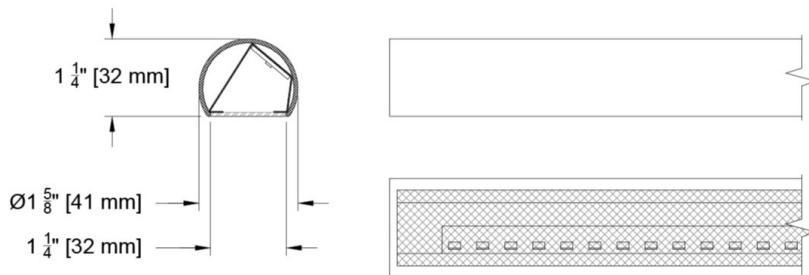

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (201)

Housing

- Extruded brass or Aluminum in brushed or polished finish
- Welded end plates with inset swivel or end swivel
- Specifiable wall projections + lengths, as needed per job
- Polished, satin, or antique finish + custom, RAL colors available

Source/Optics

- 10w with up to 741 lumens per foot at 3000K
- 90+ CRI
- 2700K, 3000K, 3500K, 4000K
- L80>38,000 hours at 40C ambient

Driver


- Universal 120-277V
- Remote mount, dimmable, electronic 0-10v or ELV phase
- Flicker free to IEEE 1789-2015 available

Labels

-  US tested to UL standards

| 201- 1.5" Picture light | | | | | |
|-------------------------|------|---------------------|--------------------------|-------------|-----------|
| Source | CCT | System watts (W/ft) | Delivered Lumens (Lm/ft) | Lumens/Watt | Peak (cd) |
| F10 | 2700 | 10 | 711 | 71 | 348 |
| F10 | 3000 | 10 | 741 | 74 | 363 |
| F10 | 3500 | 10 | 756 | 76 | 370 |
| F10 | 4000 | 10 | 771 | 77 | 378 |

Beam angle

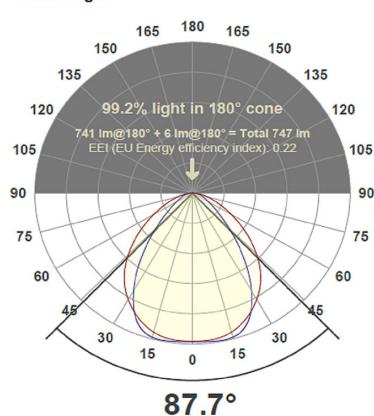

Ordering Codes

PROJECT:



SPECIFIER:

DATE:

TYPE:

QUANTITY:



Ordering Code Example: 201-B-3-3-EF-F10-27-SY1-B03

| Fixture | Mounting | Length | Arm Projection | Configuration | Source / Watts | CCT | Driver / Control | Trim Finish |
|-------------------|--|---|----------------|--|--|--|---|--|
| 201 | | | | | | | | |
| Picture Light 201 | A Wall Bracket B J-Box C Through panel | -- Specify length in 1' (300 mm) increments 3 3 inches 6 6 inches 9 9 inches 12 12 inches XX Custom projection available | | EF End swivel, friction set IF Inset swivel, friction set | F10 10W 741Lm 90+CR, 70+R9 values per foot | 27 2700K 30 3000K 35 3500K 40 4000K | C2 ELV/Triac * 1.0%, (120-120V) linear SY1 0-10 1.0%, UNV (120-277V) linear SY2 0-10 1.0%, UNV (120-277V) log EldoLED E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear | B Black Paint  W White Paint  B03 Polished brass  L07 Satin aluminum  BX Finish on brass  B01-B07  LXX Finishes on aluminum  L01-L08  PXX Specialty Paint Color*  P01-P15  C Custom/RAL Color*  FINISH GUIDE LINK |
| | | | | | | | * 2 foot minimum length required | |

Fixture Details



Picture Light Detail A - Wall Bracket/Inset Swivel

(201-A--9-IF-F10-27)

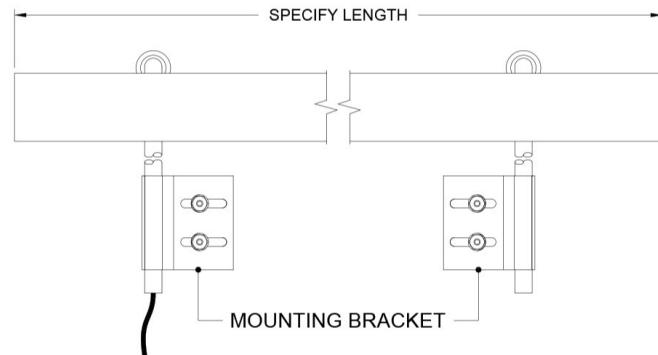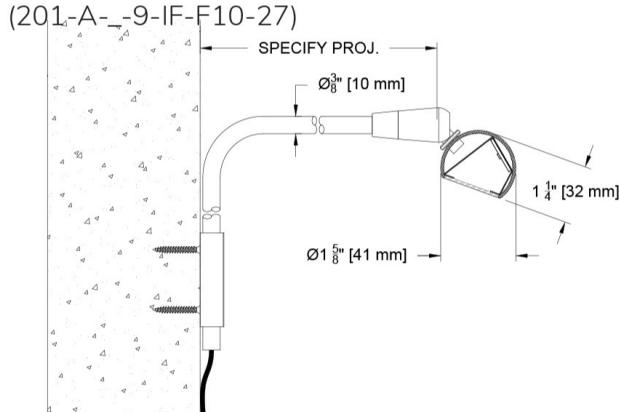



Picture Light Detail B - J-Box Mount/Inset Friction Swivel

(201-B--3-IF-F10-30)

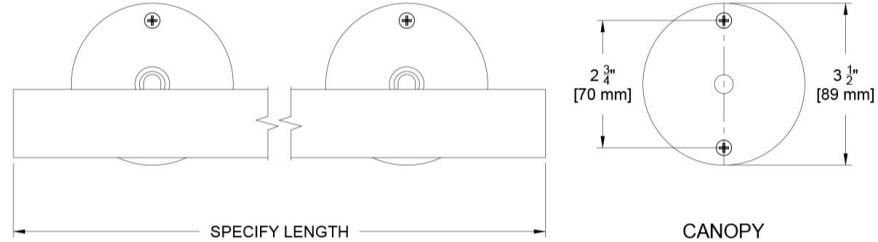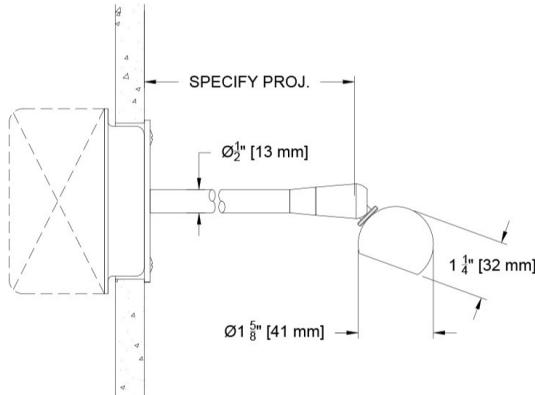


Picture Light Detail C - Through Panel Mount/Inset Friction Swivel

(201-C--6-IF-F10-30)

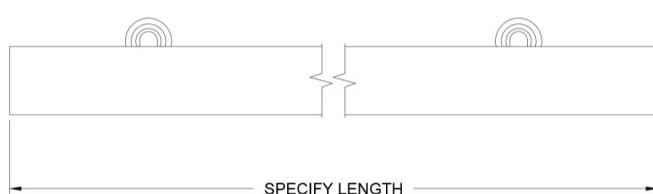
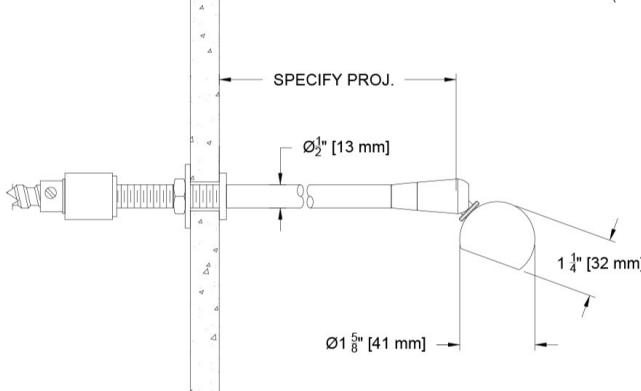


Fixture Details

Picture Light Detail \ Inset Friction Swivel (IF)



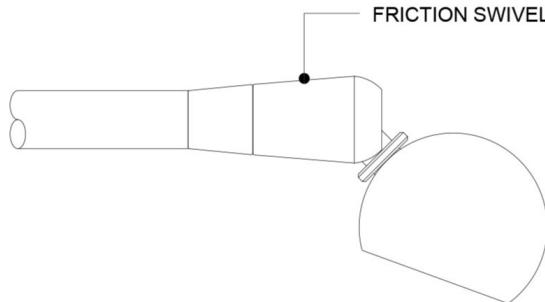


Picture Light Detail \ End Friction Swivel (EF)


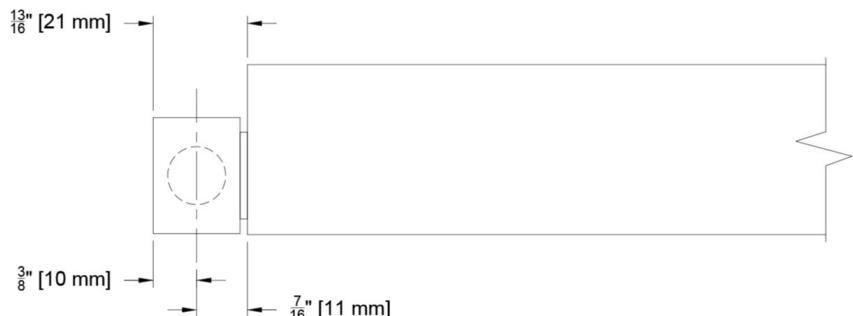
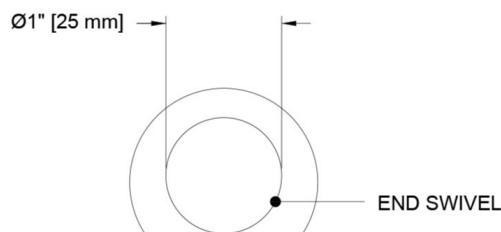


Fixture Details

Driver Enclosure for SY1, SY2, E1, E2, E3

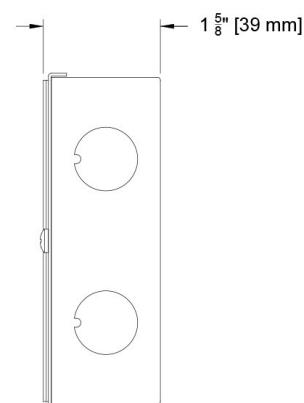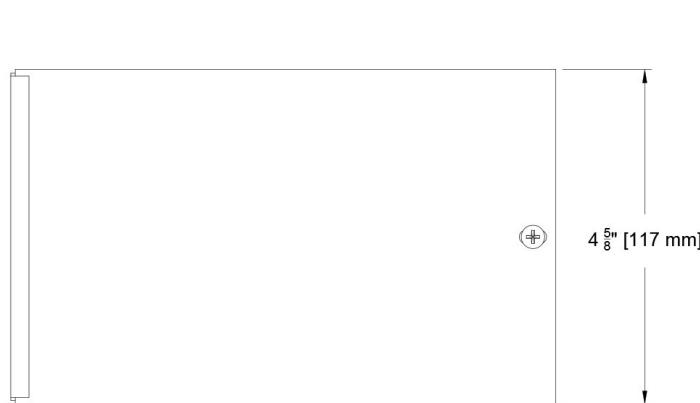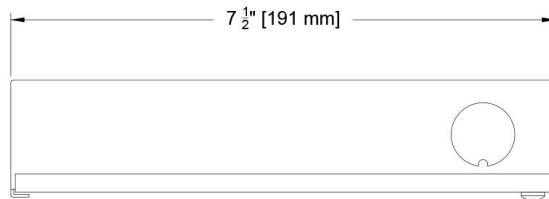

Driver Enclosure for C2

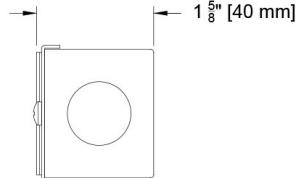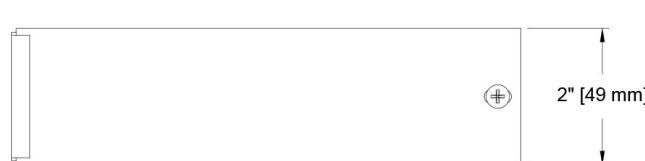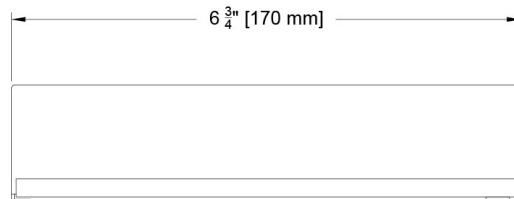


Photometric Table

Values are either Lumens/foot or Watts/foot. All Measurements delivered lumens based on 3000K and 1' (ft) length. Measurements done with Veiling Acrylic Lens (79A). Other lens choices are available but will potentially change beam spread and light output. If a specific measurement on another lens is required please contact your regional sales manager and we will be happy to run the test. All values are from production representative product and can vary +/- 10% from source manufacturers rated flux range. For other CCTs, use the following multipliers: 2700k 0.97, 3500 1.03, 4000 1.04.

| PL201- 1.5" Picture light | | | | | |
|---------------------------|------|---------------------|--------------------------|-------------|-----------|
| Source | CCT | System watts (W/ft) | Delivered Lumens (Lm/ft) | Lumens/Watt | Peak (cd) |
| F10 | 2700 | 10 | 711 | 71 | 348 |
| F10 | 3000 | 10 | 741 | 74 | 363 |
| F10 | 3500 | 10 | 756 | 76 | 370 |
| F10 | 4000 | 10 | 771 | 77 | 378 |

Measurements based on 3000K CCT

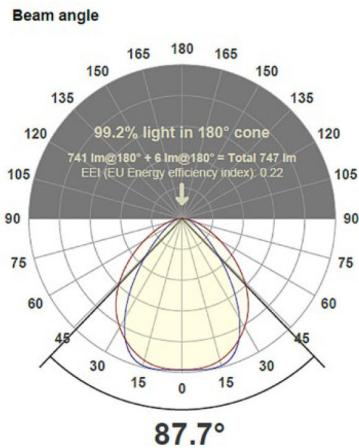

Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted.

All data below are delivered lumens. Color and flux information based on goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated nominal data as listed on their datasheet.

F10 Linear Array

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 70+R9

| PL201- 1.5" Picture light | | | | | |
|---------------------------|------|---------------------|--------------------------|-------------|-----------|
| Source | CCT | System watts (W/ft) | Delivered Lumens (Lm/ft) | Lumens/Watt | Peak (cd) |
| F10 | 2700 | 10 | 711 | 71 | 348 |
| F10 | 3000 | 10 | 741 | 74 | 363 |
| F10 | 3500 | 10 | 756 | 76 | 370 |
| F10 | 4000 | 10 | 771 | 77 | 378 |

Measurements based on 3000K CCT

