

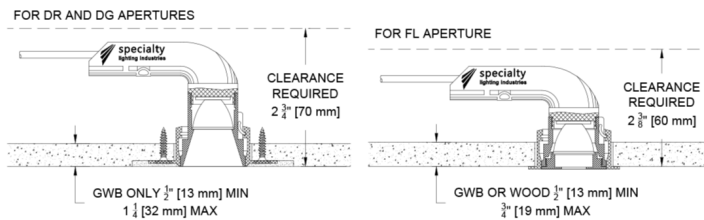
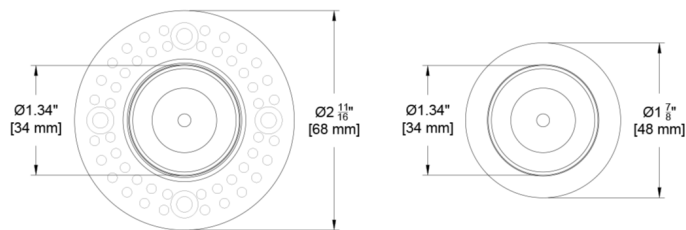


The Confetti Family

Just like little pieces of paper floating from the sky can create an amazing image in a parade, Confetti™ offers a fun way to deliver light in small packages. The Confetti™ family's array of options include recessed downlights, wallwashers, eyeball adjustables and surface offerings in the form of tiny monopoints and pendants. Have some fun and throw some Confetti™ to light your space.

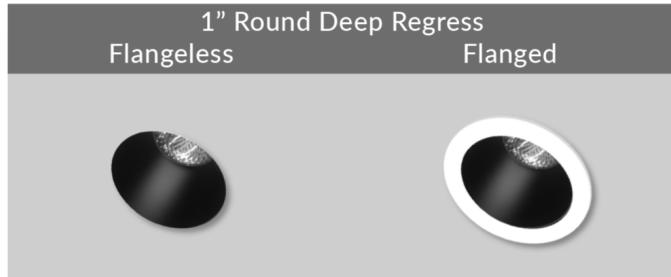

Aperture Options

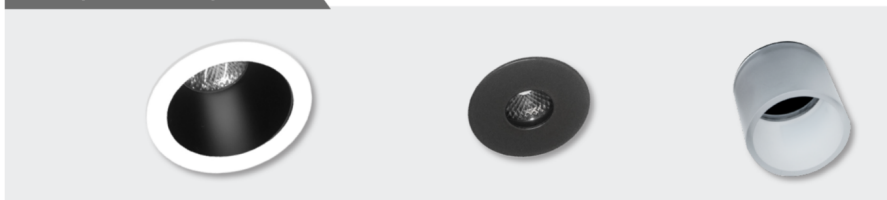

Deep Regress (DR)

Flat / Pin Hole (FL)

Drop Glass (DG)

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CF1D-RF)

Trim

- Distinctive small 1" aperture available in 3 options (Deep Regress, Flat and Dropped Glass).
- Flangeless and Flanged trims available for retrofit type installation, no housing required.
- Unique design of Flangeless Trim allows for truly flat, smooth ceilings when using the Confetti™ Counter Bore Hole Saw. For optimal installation we recommend using this tool. Order under accessories.
- Flanged trim features micro-bite wing springs.
- White or Black standard finish for aperture bezel and flanged trims.

Source / Optics

- 2700K, 3000K and 3500K available.
- 3 beamspreads available - 20°, 28° and 40°
- Up to 2193 Peak CD
- **TITLE 24 JA8** Up to 487 delivered lumens from our very small, 1" aperture
- <3 MacAdam Steps (<3SDCM) for fixed white
- 90 CRI, 60+ R9 Standard
- [View Photometry](#)

Housing

- **TITLE 24 JA8** IC Rated / airtight housing approved for use in direct contact with insulation meeting CA Title 24 requirements.
- **UL** - listed for Wet Location
- Wire pigtails are CMP rated for plenum use

Drivers

- **TruPhase** - Dimming down to 0.1% - 120V only
- Configurable driver box for up to 4 Confetti™ fixtures on a single remote driver. Can be mixed with other fixtures within the Confetti™ family. Quantity of driver boxes needs to be specified based upon number of fixtures and control zone requirements.
- Remote Universal EldoLED driver, 120-277V
- Flicker free to IEEE 1789-2015
- 0-10, DALI-2

Ordering Codes

PROJECT: _____ SPECIFIER: _____


DATE: _____ TYPE: _____ QUANTITY: _____

Ordering Code Example: CF1D-RF-DR-Z-SG7-30-20-CFD/E1-2-B-K/ (1) CFCBHS for entire order

FIXTURE	APERTURE	TRIM	SOURCE / WATTS	CTT	BEAM	DRIVER / CONTROL	DRIVER QUANTITY	BEZEL FINISH	TRIM FINISH	ACCESSORIES
CF1D-RF										
Confetti™ 1" Round Fixed Downlight	DR Deep Regress FL Flat (Pin Hole) DG Drop Glass* * Bezel finish not applicable to drop glass	Flangeless Trims Z Flangeless Trim* ZPM Flangeless Panel Mont Flanged Trims F Flanged Trim^ * Recommend that CFCBHS tool listed under Accessories be purchased for easy installation. Refer to Ceiling Cutouts and Dimensions for details. Trim finish does not apply to flangeless trims. ^ Must specify trim finish for flanged trim	SG7   8W 487Lm* 90+CRI, 65+R9   Supports CA Title 24 compliance to JA8 requirements * Based on Deep Regress with 40° beamspread View Photometry	27 2700K 30 3000K 35 3500K	20 Spot 28 Narrow Flood 40 Flood * * Not recommended for use with the FL- Flat (pinhole) aperture	CFD/E1 0-10* 0.1%, UNV (120-277V) log CFD/E2 DALI-2* 0.1%, UNV (120-277V) log CFD/E3 0-10* 0.1%, UNV (120-277V) linear K No driver required. (CFD box has been specified with another Confetti product) TR2 TruPhase™ 0.1%, (120-120V) log Up to 20W Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only * Remote driver only.	# Specify number of drivers Must specify # of driver boxes based upon control requirements and 1-4 fixtures per driver. See Electrical Configuration and Control section of cut sheets for details.	B Black Paint  W White  K Blank for Drop Glass Aperture Option	B Black Paint  W White Paint  K Blank for use with Flangeless	CFCBHS Counter Bore Hole Saw for Flangeless Trims Controls ATH Lutron Athena Wireless Node <i>Must be used with E2 driver</i> Recommended for proper installation of Flangeless Trims. Only one required per project.

Ceiling Cutouts and Dimensions

All Aperture Types Shown

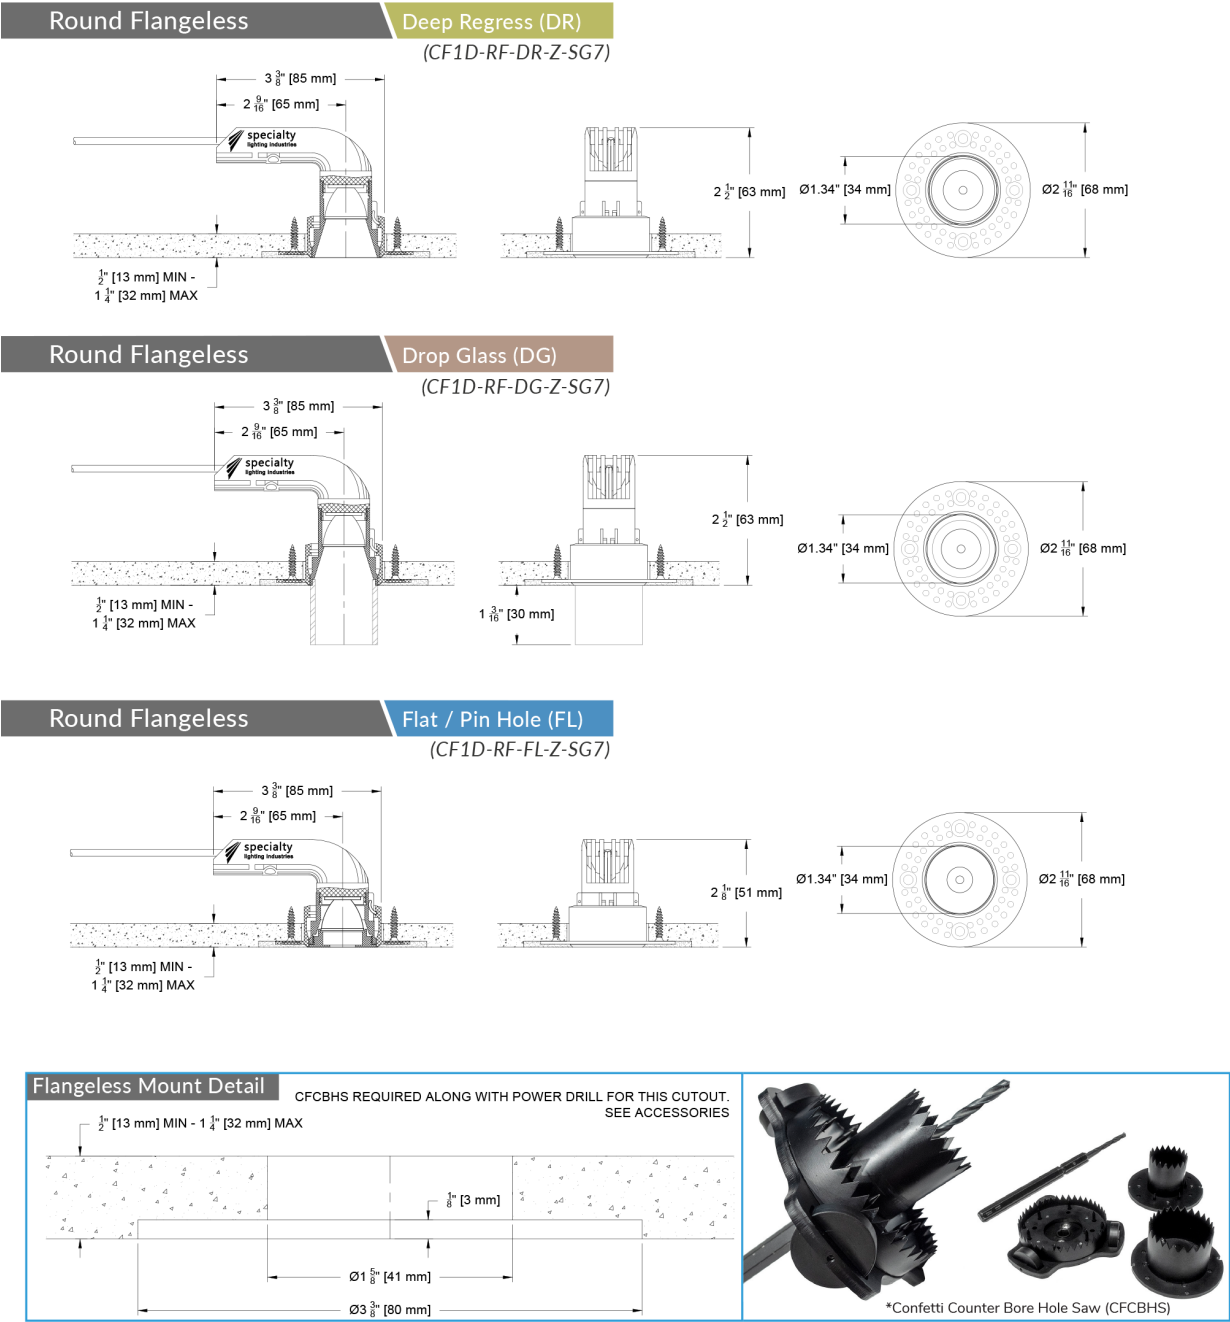


Ceiling Cutouts and Dimensions

All Aperture Types Shown

Round Flanged

Deep Regress (DR)


(CF1D-RF-DR-F-SG7)

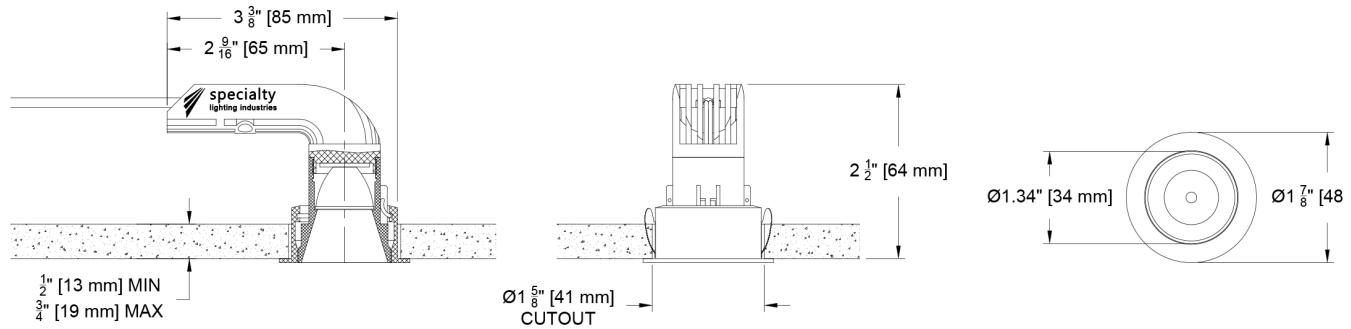

Round Flanged

Drop Glass (DG)


(CF1D-RF-DG-F-SG7)

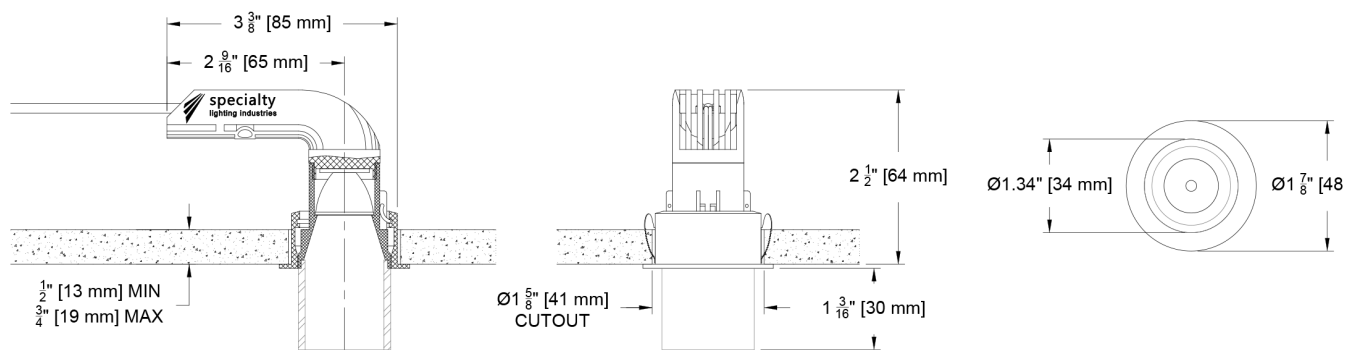

Round Flanged

Flat / Pin Hole (FL)

(CF1D-RF-FL-F-SG7)

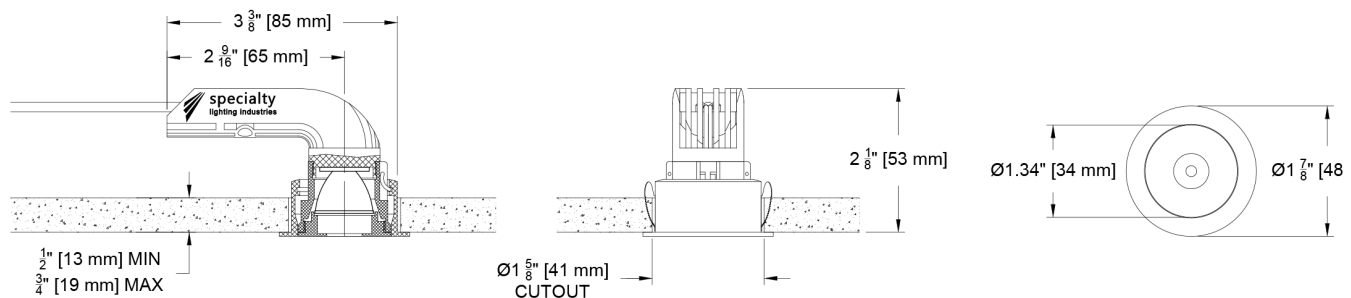


Ceiling Cutouts and Dimensions

All Aperture Types Shown

Flangeless Panel Mount

Deep Regress (DR)


(CF1D-RF-DR-ZPM-SG7)

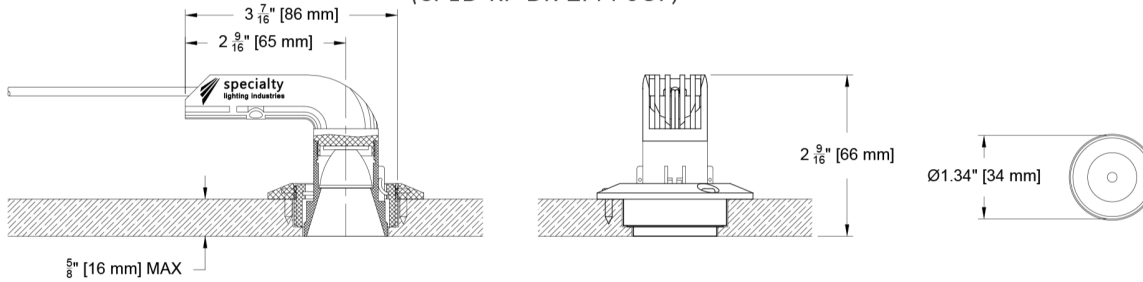

Flangeless Panel Mount

Drop Glass (DG)




(CF1D-RF-DG-ZPM-SG7)

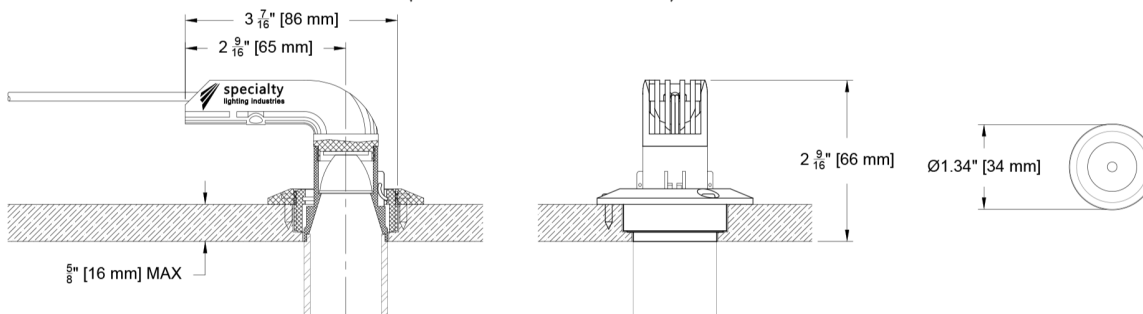

Flangeless Panel Mount



Flat / Pin Hole (FL)



(CF1D-RF-FL-ZPM-SG7)

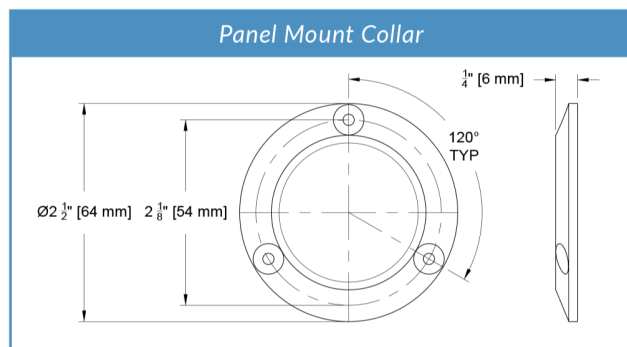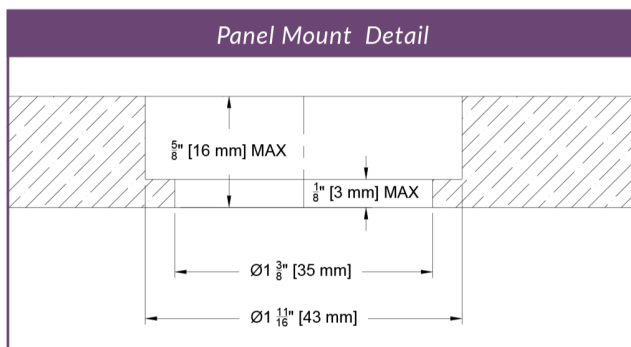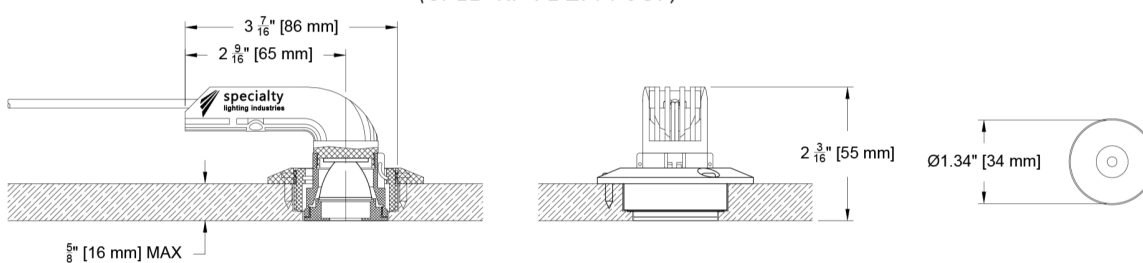

Photometric Table All data below are delivered lumens based on goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated nominal flux.

ROUND Beamspreads		20°					28°				40°			
Source		System watts (W)	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field
Deep Regress	SG7	8	410	51	2193	48°	437	55	1391	55°	487	61	1137	59°
	SG7	8	205	27	1246	37°	254	34	1062	44°	N/A	N/A	N/A	N/A
Dropped Glass	SG7	8	390	52	2143	31°	378	50	1419	38°	389	52	1094	42°
CCT Multiplier														
CCT	CITIZEN													
2700	0.95													
3000	1.00													
3500	1.02													
4000	1.03													
All measurements based on 3000 CCT.														

Beam angle	
	
18.9°	28.3°

Beam angle	
	
39.9°	



All measurements are delivered lumens based on 3000K unless otherwise noted below.
ISO cd Plots based on Deep Regress with SG7 Source. Refer to photometry tab on product page for exact ISO cd plot and IES files.
The following combinations do not meet CA Title 24 JAB requirements: Flat Aperture SG7 source in all beam spreads.s.

Color Data





All Color information is based on goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer data range as listed on their datasheet.

Specialty Array - SG7

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1 and 16

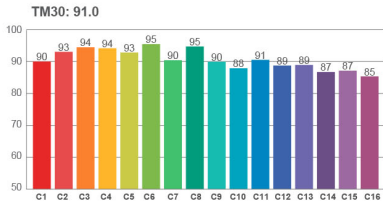

Spectra

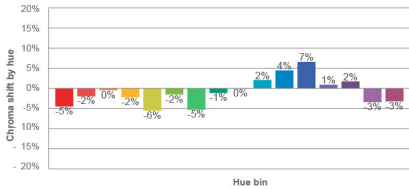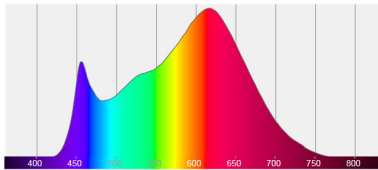

Electrical Configuration and Control

Confetti Driver Enclosure


for CFD/E1, CFD/E2, CFD/E3

REMOTE MOUNTING REQUIRED

7 1/2" [191 mm]

4 5/8" [117 mm]


1 3/4" [43 mm]

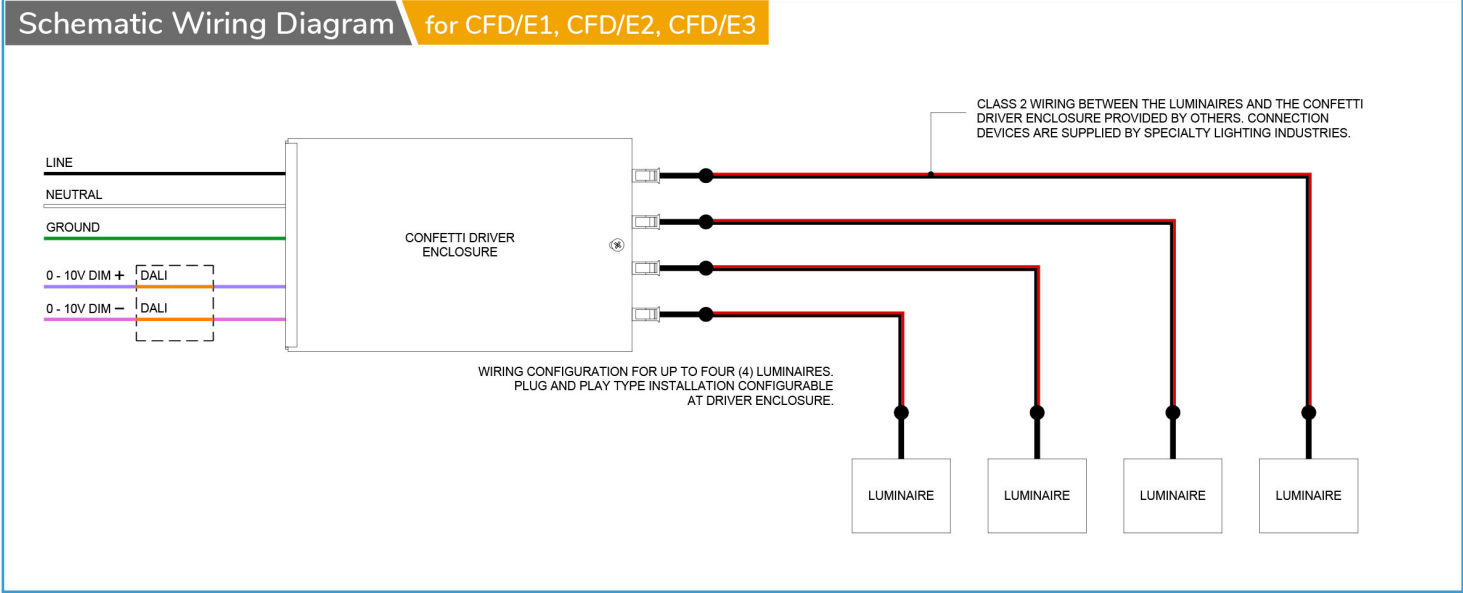

Electrical Configuration and Control

System Wiring Diagram for
Confetti Driver Enclosure

for CFD/E1, CDF/E2, CFD/E3

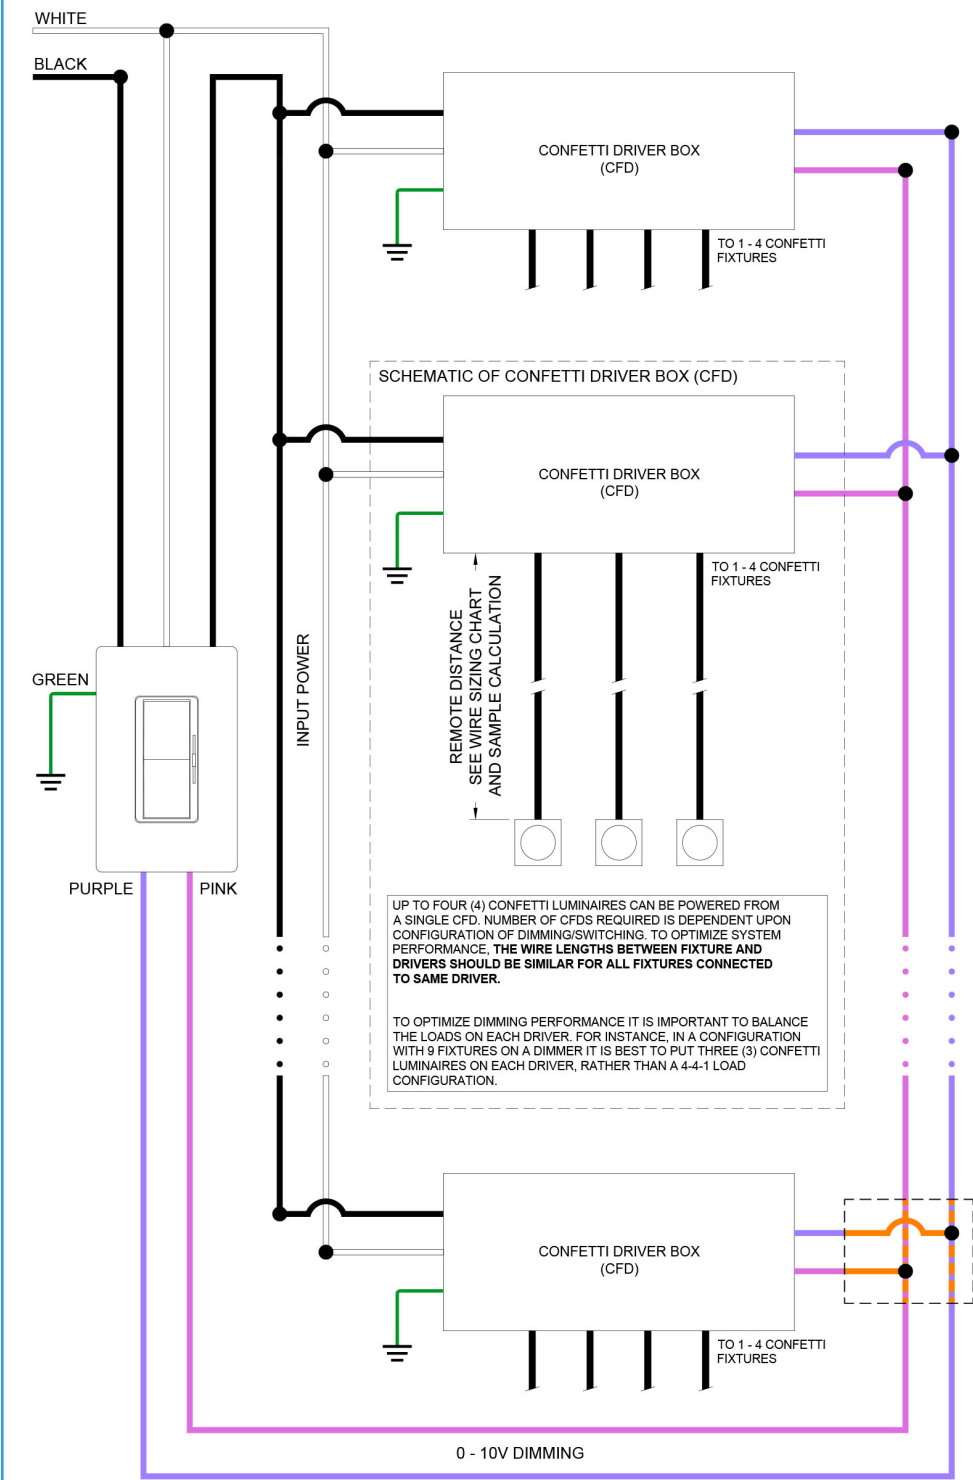

Remote Wire Sizing Chart
CFD/E1, CFD/E2, CFD/E3 Drivers


for All Point Sources

Max Remote Distance*	Wire Size
46 ft (14 m)	AWG 20 (0.52 mm ²)
72 ft (22 m)	AWG 18 (0.82 mm ²)
118 ft (36 m)	AWG 16 (1.31 mm ²)

* Max Remote Distance calculated by adding the sum of remote distances for all fixtures connected to driver, i.e. four (4) fixtures connected to a single driver, each 20 feet from driver, the remote distance is 80 feet.
For more information and dimmer compatibility refer to driver manufacturer's website:
EldoLED (E2) Drivers - <https://eldoled.com/product/dualdrive>

EXAMPLE 3 Fixtures @ Various Length each
Calculate Max Remote Distance=
Add the sum of all fixture lengths

1-4 Confetti Fixtures Max

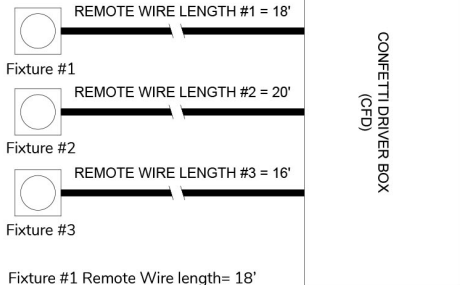

Fixture #1 Remote Wire length= 18'
Fixture #2 Remote Wire Length=20'
Fixture #3 Remote Wire Length=16'
Total Remote Distance = 54'

54' Requires AWG 18 wire because it is less than 72ft maximum distance listed for AWG18.

Note: For the CF1D-RP fixture add 5 feet to remote distance lengths to include the suspension length of the pendant wiring in voltage drop calculations.

Electrical Configuration and Control

Confetti - TruPhase™ Driver for TR2

