


The Confetti Family

Just like little pieces of paper floating from the sky can create an amazing image in a parade, Confetti™ offers a fun way to deliver light in small packages. The Confetti™ family's array of options include recessed downlights, wallwashers , eyeball adjustables and surface offerings in the form of tiny monopoints and pendants. Have some fun and throw some Confetti™ to light your space.


PROJECT: TYPE:
SPECIFIER: DATE:

Key Points (CF1D-RM)

Housing


- Distinctive, small 1" diameter, 2-3/8" long fully adjustable accent light with 360° rotation and 90° tilt.
- Flanged trim features micro-bite wing springs.
- Flangeless and Flanged trims available for retrofit type installation, no housing required.
- Unique design of Flangeless Trim allows for truly flat, smooth ceilings when using the Confetti™ Counter Bore Hole Saw. For optimal installation we recommend this tool. Order under accessories.
- White or Black standard finish for housing and flanged trims.
- Trim bezels are black for low brightness and glare control.
-  Us Listed – Damp
- Wire pigtails are CMP rated for plenum use.

Source / Optics

- TM21-11/L80>60,000 hours at 40°C Ambient
- 2700k, 3000k and 3500k available.
- 3 beamspreads available - 30°, 35°and 45°
- Up to 1578 Peak CD
-  Up to 407 delivered lumens
- <3 MacAdam Steps (<3SDCM) for fixed white
- 90 CRI , 60+ R9 Standard

Drivers

- Configurable driver box for up to 4 Confetti fixtures on a single remote driver. Can be mixed with other fixtures within the Confetti™ family. Quantity of driver boxes needs to be specified based upon number of fixtures and control zone requirements.
- Remote Universal EldoLED driver, 120-277V
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- 0-10, DALI-2, TruPhase™

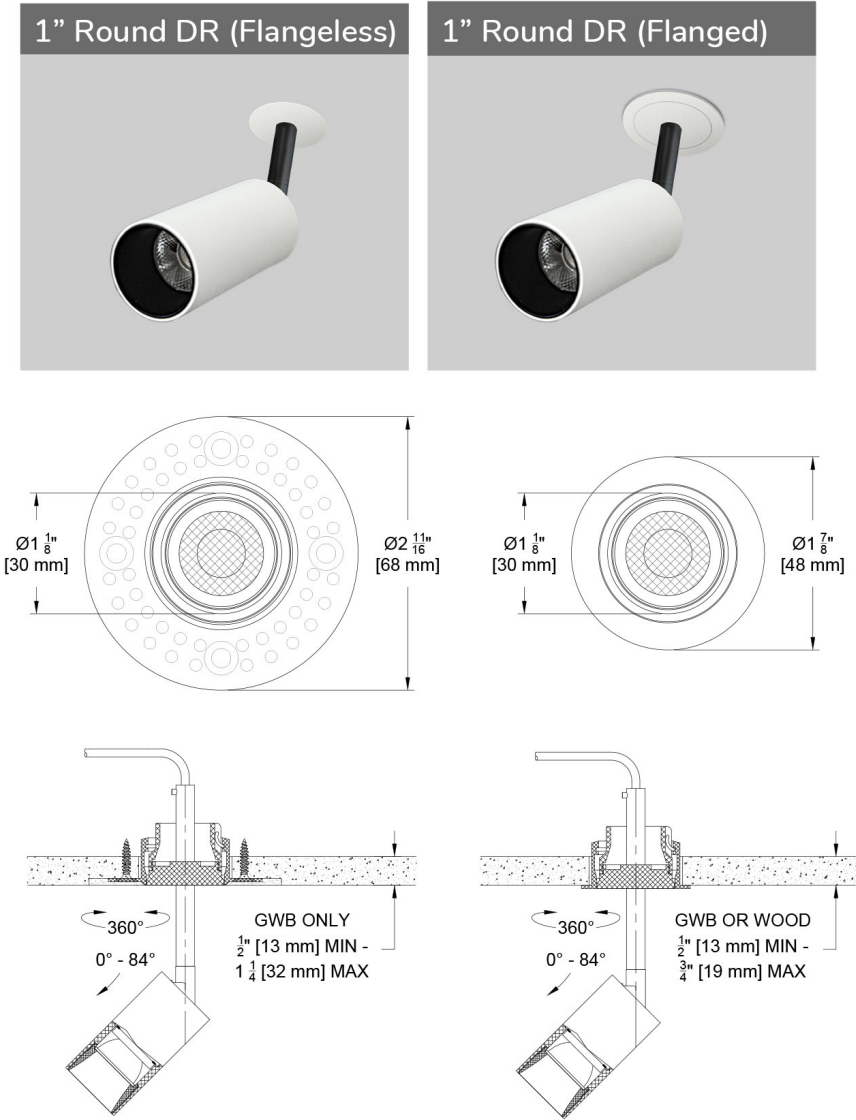









MONOPOINT Beamspreads		30°					35°				45°			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field		Delivered Lumens (lm)	Lms/Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lms/ Watt	Peak CD	10% Field
C6	6	388	63	1578	47°		398	64	1292	51°	407	66	893	60°

Ordering Codes

PROJECT:
SPECIFIER:

DATE:
TYPE:
QUANTITY:

Ordering Code Example: CF1D-RM-Z-C6-30-36-CFD/E1-1-B-K-B-CFCBHS(1)


FIXTURE	TRIM	SOURCE / WATTS	CCT	BEAM	DRIVER / CONTROL	DRIVER QUANTITY	TRIM FINISH	HEAD FINISH	ACCESSORIES
CF1D-RM									
Confetti™ 1" Round Monopoint	Z Flangeless Trim* F Flanged Trim^	Citizen C6   6W 407Lm 90+CRI, 60+R9   Supports CA Title 24 & JA8 Compliance * Based on Deep Regress with 45° beamspread	27 2700K 30 3000K 35 3500K	30 Medium 35 Flood 45 Flood	CFD/E1 0-10" 0.1%, UNV (120-277V) log CFD/E2 DALI-2* 0.1%, UNV (120-277V) log CFD/E3 0-10" 0.1%, UNV (120-277V) linear K No driver required. (CFD box has been specified with another Confetti product) TR2 TruPhase™ 0.1%, (100-277V) Up to 20W Forward and Reverse compatible Phase Dimming 2 Dimming Curves: Linear/Logarithmic Static White & Ambient Dim only * Remote driver only. Maximum 4 fixtures per driver.	# Specify number of drivers Must specify # of driver boxes based upon control requirements and 1-4 fixtures per driver. See Electrical Configuration and Control section of cut sheets for details.	B Black Paint  W White Paint  K Blank for use with Flangeless	B Black Paint  W White 	CFCBHS Counter Bore Hole Saw for Flangeless Trims Controls ATH Lutron Athena Wireless Node <i>Must be used with E2 driver</i> Recommended for proper installation of Flangeless Trims. Only one required per project.

Ceiling Cutouts and Dimensions

Cylinder Flangeless

Deep Regress (DR)


(CF1D-RM-DR-Z-)

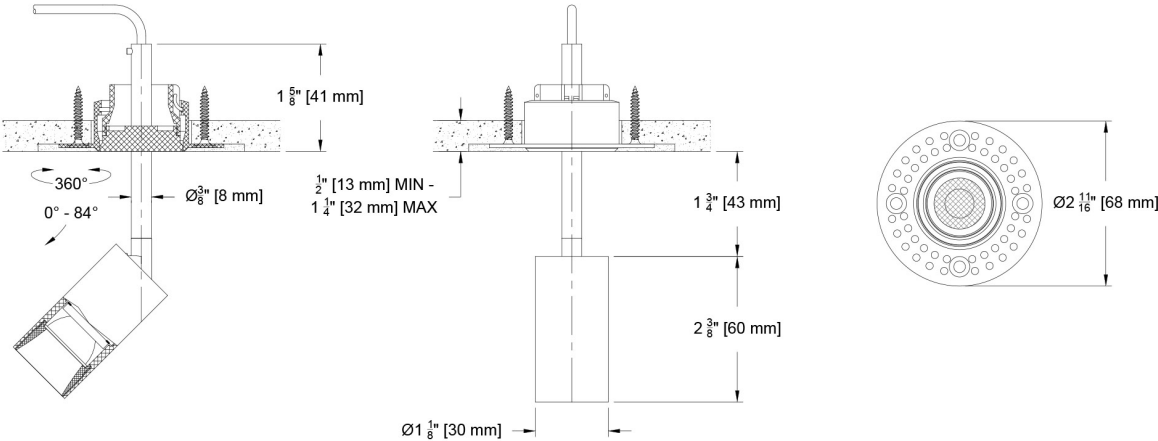

Cylinder Flanged


Deep Regress (DR)

(CF1D-RM-DR-F-)

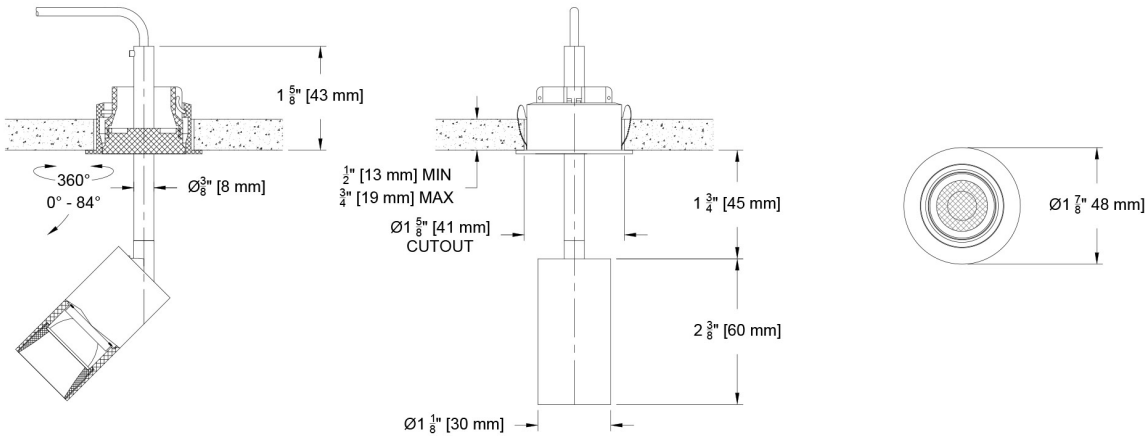




Flangeless Mount Detail

CFCBHS REQUIRED ALONG WITH POWER DRILL FOR THIS CUTOUT. SEE ACCESSORIES

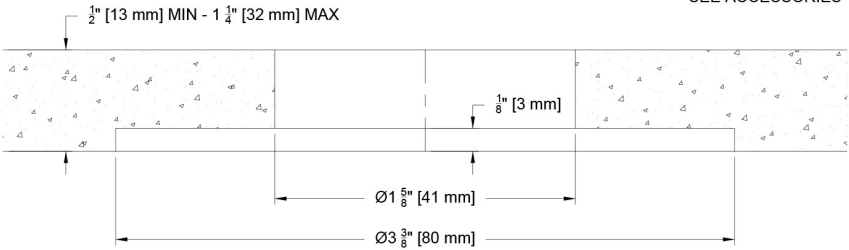

*Confetti Counter Bore Hole Saw (CFCBHS)

Photometric Table All data below are delivered lumens based on goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated nominal flux.

ROUND Beamspreads			30°				36°				48°			
Source		System watts (W)	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lms/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lms/ Watt	Peak CD	10% Field
Monopoint	C6	6	388	63	1578	47°	398	64	1292	51°	407	66	893	60°
	CCT Multiplier		Beam angle				Beam angle				Beam angle			
	CCT	Citizen												
	2700	0.95												
	3000	1.00												
	3500	1.02												
	4000	1.03												


All measurements are delivered lumens based on 3000K unless otherwise noted below.
ISO cd Plots based on Monopoint with C6 Source.
Refer to photometry tab on product page for exact ISO cd plot and IES files.

Color Data

All Color information is based on goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer data range as listed on their datasheet.

Citizen Source - C6


- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1 and 16

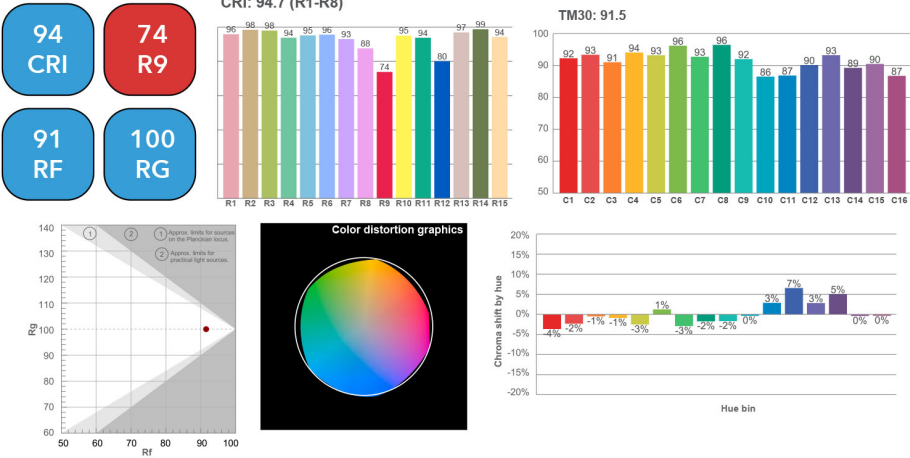


Electrical Configuration and Control

Confetti Driver Enclosure for CFD/E1, CFD/E2, CFD/E3

REMOTE MOUNTING REQUIRED

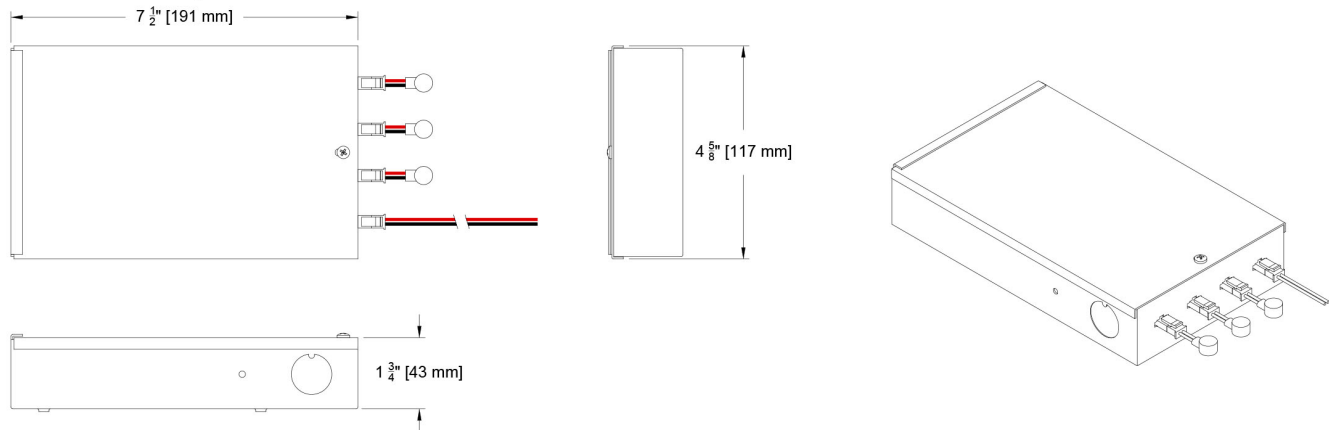


Schematic Wiring Diagram for CFD/E1, CFD/E2, CFD/E3

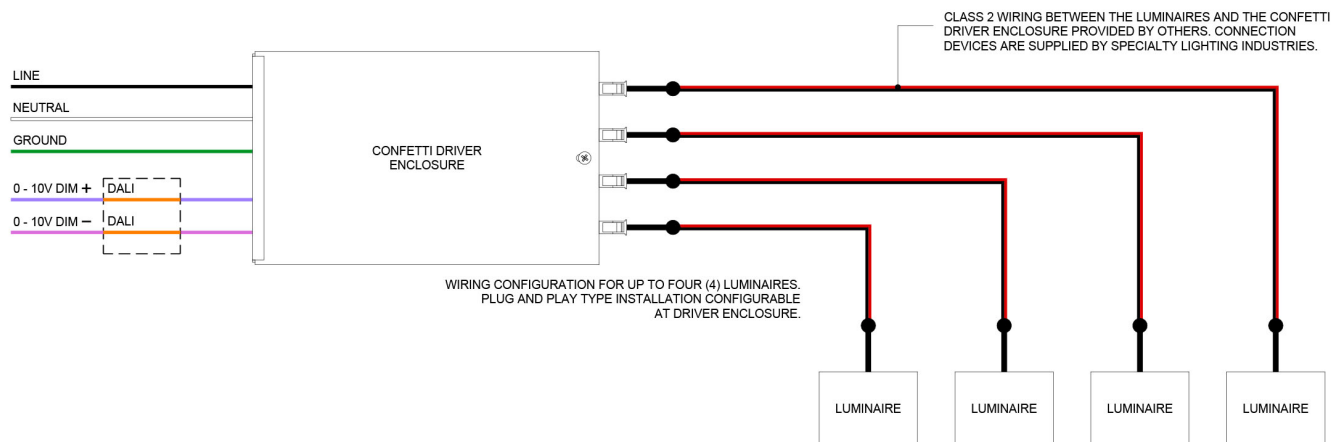

Electrical Configuration and Control

System Wiring Diagram for
Confetti Driver Enclosure

for CFD/E1, CDF/E2, CFD/E3

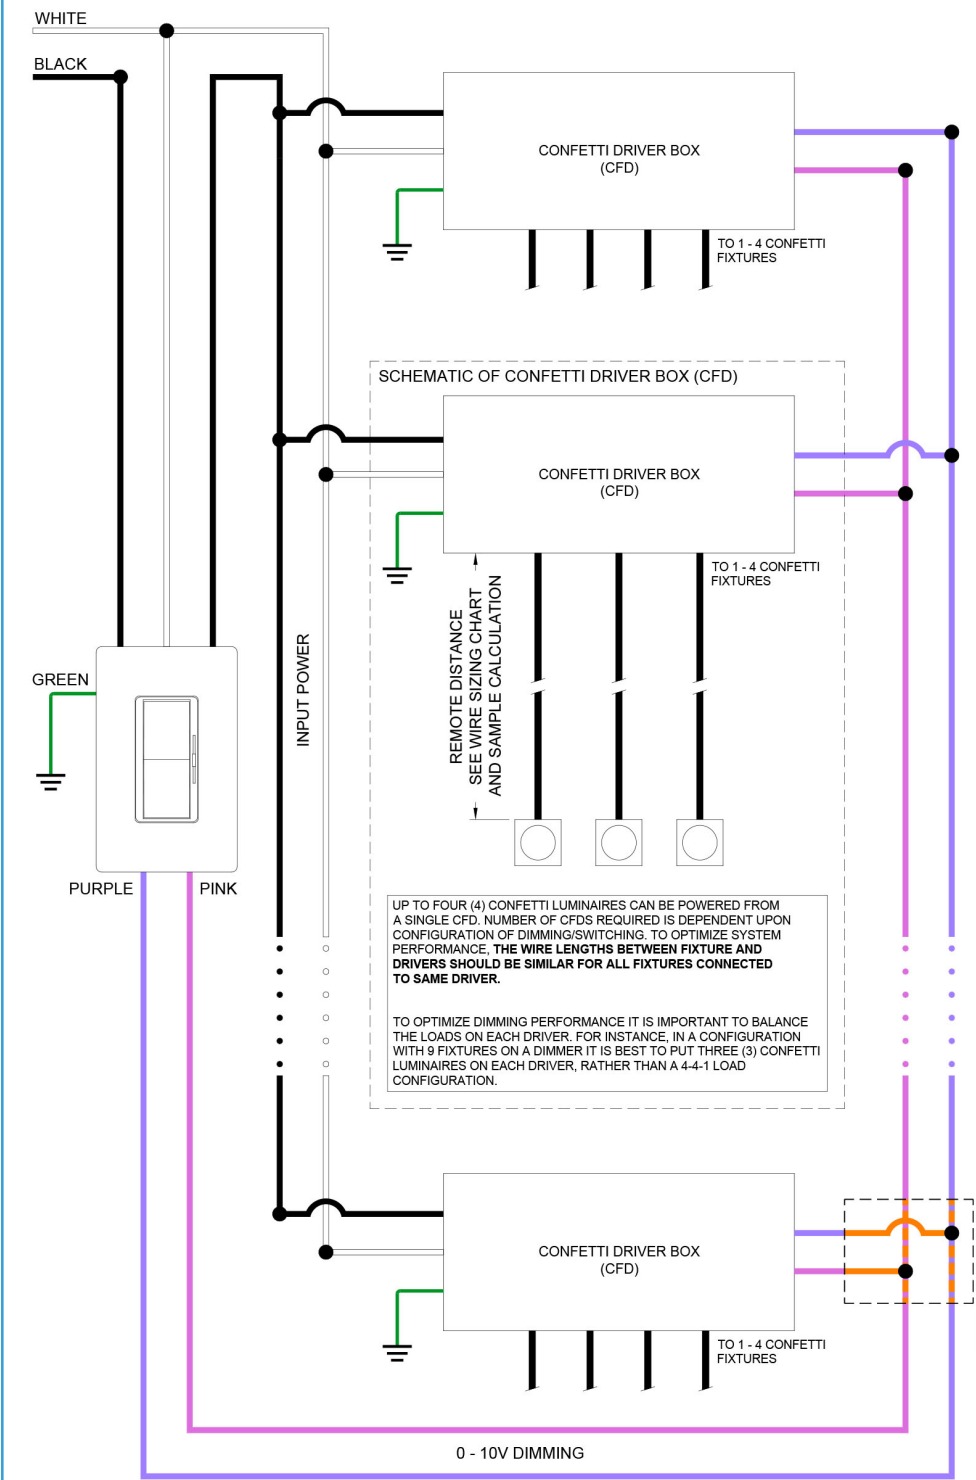

Remote Wire Sizing Chart
CFD/E1, CFD/E2, CFD/E3 Drivers


for All Point Sources

Max Remote Distance*	Wire Size
46 ft (14 m)	AWG 20 (0.52 mm ²)
72 ft (22 m)	AWG 18 (0.82 mm ²)
118 ft (36 m)	AWG 16 (1.31 mm ²)

* Max Remote Distance calculated by adding the sum of remote distances for all fixtures connected to driver, i.e. four (4) fixtures connected to a single driver, each 20 feet from driver, the remote distance is 80 feet.
For more information and dimmer compatibility refer to driver manufacturer's website:
EldoLED (E2) Drivers - <https://eldoled.com/product/dualdrive>

EXAMPLE 3 Fixtures @ Various Length each
Calculate Max Remote Distance=
Add the sum of all fixture lengths

1-4 Confetti Fixtures Max

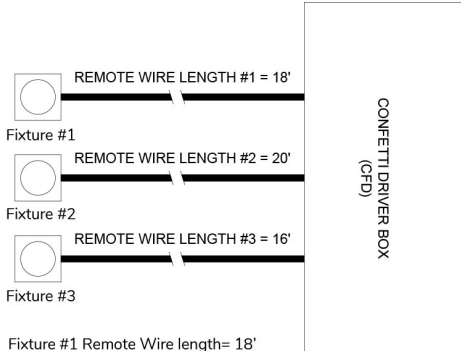

Fixture #1 Remote Wire length= 18'
Fixture #2 Remote Wire Length=20'
Fixture #3 Remote Wire Length=16'
Total Remote Distance = 54'

54' Requires AWG 18 wire because it is less than 72ft maximum distance listed for AWG18.

Note: For the CF1D-RP fixture add 5 feet to remote distance lengths to include the suspension length of the pendant wiring in voltage drop calculations.