



The Confetti Family

Just like little pieces of paper floating from the sky can create an amazing image in a parade, Confetti™ offers a fun way to deliver light in small packages. The Confetti™ family's array of options include recessed downlights, wallwashers, eyeball adjustables and surface offerings in the form of tiny monopoints and pendants. Have some fun and throw some Confetti™ to light your space.

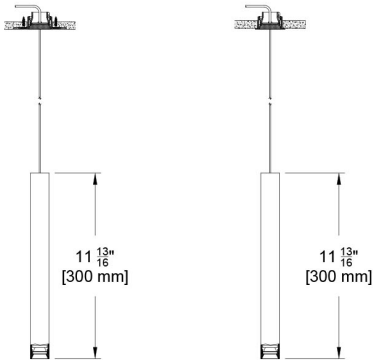


PENDANT Beamspreads		30°				36°				45°			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lms/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lms/ Watt	Peak CD	10% Field
C6	6	451	72	1598	50°	448	71	1195	56°	456	72	780	66°

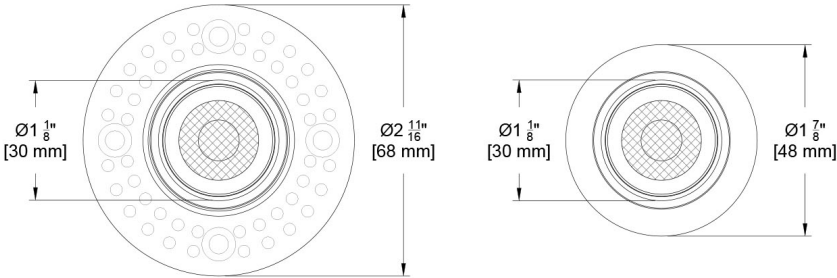

PROJECT: TYPE:
SPECIFIER: DATE:

Key Points (CF1D-RP)

Housing

- Distinctive, 12" long, 1" diameter fully accent pendant with field cuttable suspension/power cord up to 56" long.
- Flangeless and Flanged trims available for retrofit type installation, no housing required.
- Unique design of Flangeless Trim allows for truly flat, smooth ceilings when using the Confetti™ Counter Bore Hole Saw. For optimal installation we recommend this tool. Order under accessories.
- Flanged trim features micro-bite wing springs.
- White or Black standard finish for housing and flanged trims.
- Trim bezels are black for low brightness and glare control.
-  Us Listed – Damp
- Wire pigtails are CMP rated for plenum use

Source / Optics

- TM21-11/L80>60,000 hours at 40°C Ambient
- 2700k, 3000k and 3500k available.
- 3 beamspreads available - 30°, 35° and 45°
- Up to 1598 Peak CD
-   Up to 456 delivered lumens delivered from a distinctive slender form
- <3 MacAdam Steps (<3SDCM) for fixed white
- 90 CRI , 60+ R9 Standard

Drivers

- Configurable driver box for up to 4 Confetti fixtures on a single remote driver. Can be mixed with other fixtures within the Confetti™ family. Quantity of driver boxes needs to be specified based upon number of fixtures and control zone requirements.
- Remote Universal EldoLED driver, 120-277V
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- 0-10, DALI-2, TruPhase™

Ordering Codes


PROJECT: SPECIFIER:

DATE: TYPE: QUANTITY:

Ordering Code Example: CF1D-RP-Z-C6-30-36-CFD/E1-3-B-WHT-K-CFCBHS


FIXTURE	TRIM	SOURCE / WATTS	CCT	BEAM	DRIVER / CONTROL	DRIVER QUANTITY	TRIM FINISH	HEAD FINISH	ACCESSORIES
CF1D-RP									
Confetti™ 1" Round Pendant	<div>Z</div> <div>Flangeless Trim*</div> <div>F</div> <div>Flanged Trim^</div> <div><p>* Recommend that CFCBHS tool listed under Accessories be purchased for easy installation. Refer to Ceiling Cutouts and Dimensions for details. Trim finish does not apply to flangeless trims.</p><p>^ Must specify trim finish for flanged trim</p></div>	<div>Citizen</div> <div>C6 <div></div><div></div></div> <div>6W</div> <div>456Lm*</div> <div>90+CRI, 60+R9</div> <div><p><div></div><div></div> Supports CA Title 24 & JA8 Compliance</p><p>* Based on Deep Regress with 45° beamsread</p></div>	<div>27</div> <div>2700K</div> <div>30</div> <div>3000K</div> <div>35</div> <div>3500K</div>	<div>30</div> <div>Medium</div> <div>35</div> <div>Flood</div> <div>45</div> <div>Flood</div>	<div>CFD/E1</div> <div>0-10"</div> <div>0.1%, UNV (120-277V) log</div> <div>CFD/E2</div> <div>DALI-2*</div> <div>0.1%, UNV (120-277V) log</div> <div>CFD/E3</div> <div>0-10"</div> <div>0.1%, UNV (120-277V) linear</div> <div>K</div> <div>No driver required. (CFD box has been specified with another Confetti product)</div> <div>TR2</div> <div>TruPhase™</div> <div>0.1%, (100-277V)</div> <div>Up to 20W</div> <div>Forward and Reverse compatible Phase Dimming</div> <div>2 Dimming Curves: Linear/Logarithmic</div> <div>Static White & Ambient Dim only</div> <div><p>* Remote driver only.</p></div>	<div>#</div> <div>Specify number of drivers</div> <div><p>Must specify # of driver boxes based upon control requirements and 1-4 fixtures per driver.</p></div> <div>See Electrical Configuration and Control section of cut sheets for details.</div>	<div>B</div> <div>Black Paint</div> <div><div></div></div> <div>W</div> <div>White Paint</div> <div><div></div></div> <div>K</div> <div>Blank for use with Flangeless</div>	<div>B</div> <div>Black Paint</div> <div><div></div></div> <div>W</div> <div>White Paint</div> <div><div></div></div>	<div>CFCBHS</div> <div>Confetti Counter Bore Hole Saw for Flangeless Trims</div> <div>Controls</div> <div>ATH</div> <div>Lutron Athena Wireless Node</div> <div>Must be used with E2 driver</div> <div>Recommended for proper installation of Flangeless Trims. Only one required per project.</div>

Ceiling Cutouts and Dimensions



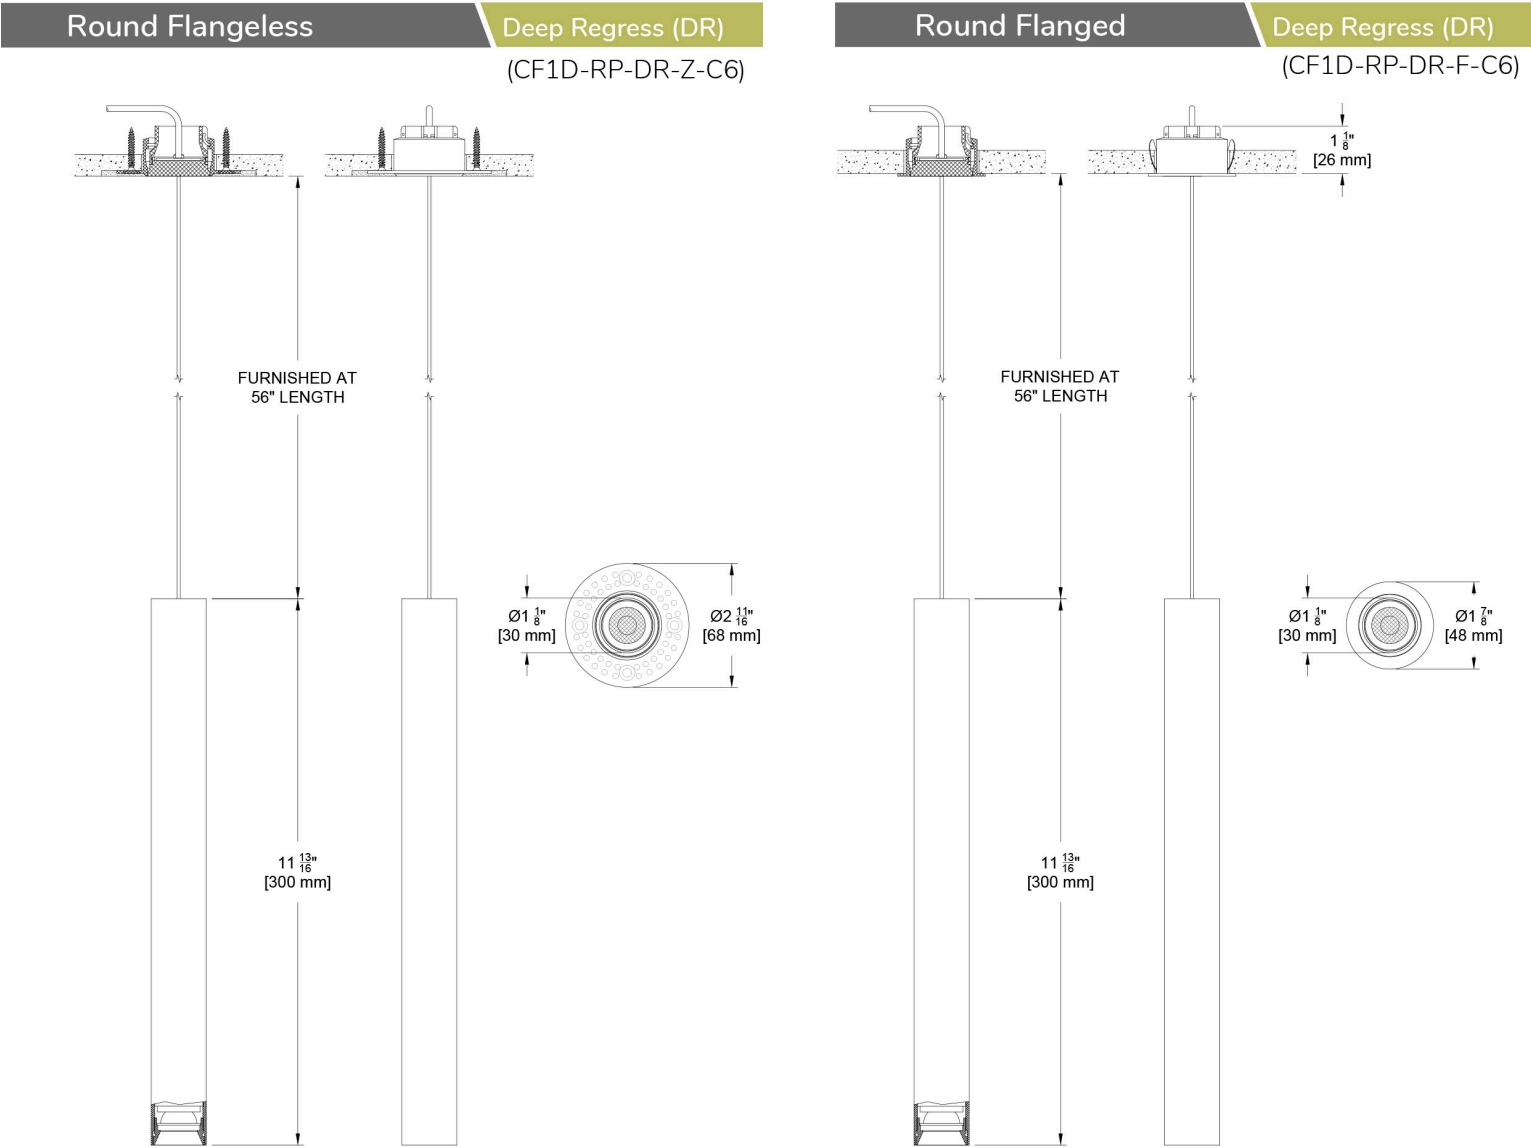


Flangeless Mount Detail

CFCBHS REQUIRED ALONG WITH POWER DRILL FOR THIS CUTOUT.
SEE ACCESSORIES

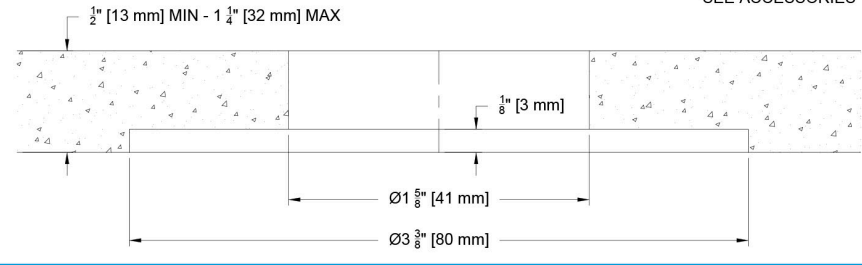

Photometric Table All data below are delivered lumens based on goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated nominal flux.

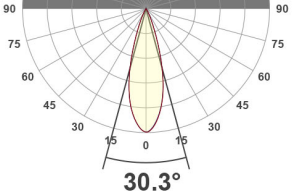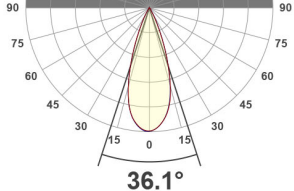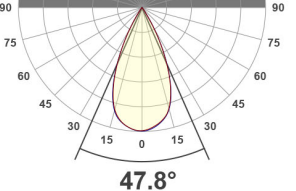ROUND Beamspreads			30°				36°				45°			
Source		System watts (W)	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lms/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lms/ Watt	Peak CD	10% Field
Pendant	C6	6	451	72	1598	50°	448	71	1195	56°	456	72	780	66°
	CCT Multiplier		Beam angle				Beam angle				Beam angle			
	CCT	Citizen												
	2700	0.95	30.3°				36.1°				47.8°			
	3000	1.00												
	3500	1.02												
	4000	1.03												


All measurements are delivered lumens based on 3000K unless otherwise noted below.
ISO cd Plots based on Pendant with C6 Source.
Refer to photometry tab on product page for exact ISO cd plot and IES files.

Color Data

All Color information is based on goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer data range as listed on their datasheet.

Citizen Source - C6

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1 and 16

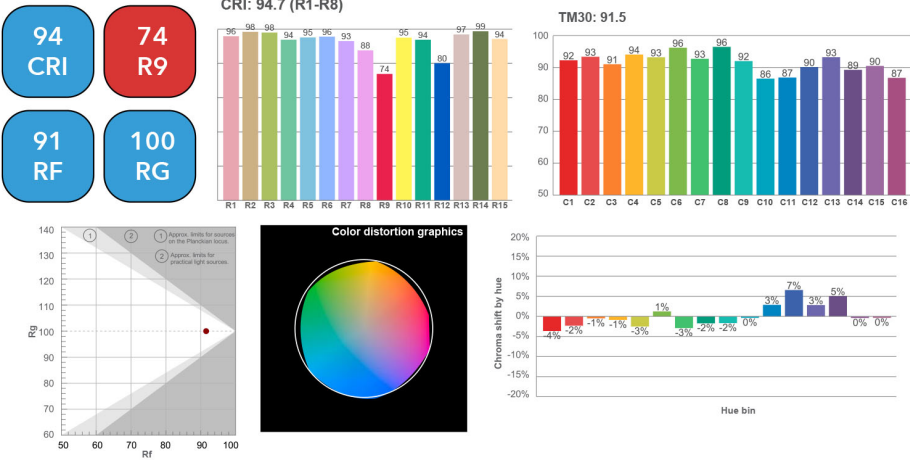


Electrical Configuration and Control

Confetti Driver Enclosure for CFD/E1, CFD/E2, CFD/E3

REMOTE MOUNTING REQUIRED

Technical drawings of the Confetti Driver Enclosure. The top view shows a width of 7 1/2" [191 mm] and a height of 4 5/8" [117 mm]. The side view shows a depth of 1 3/4" [43 mm]. An isometric view shows the enclosure with its mounting tabs and terminal block.

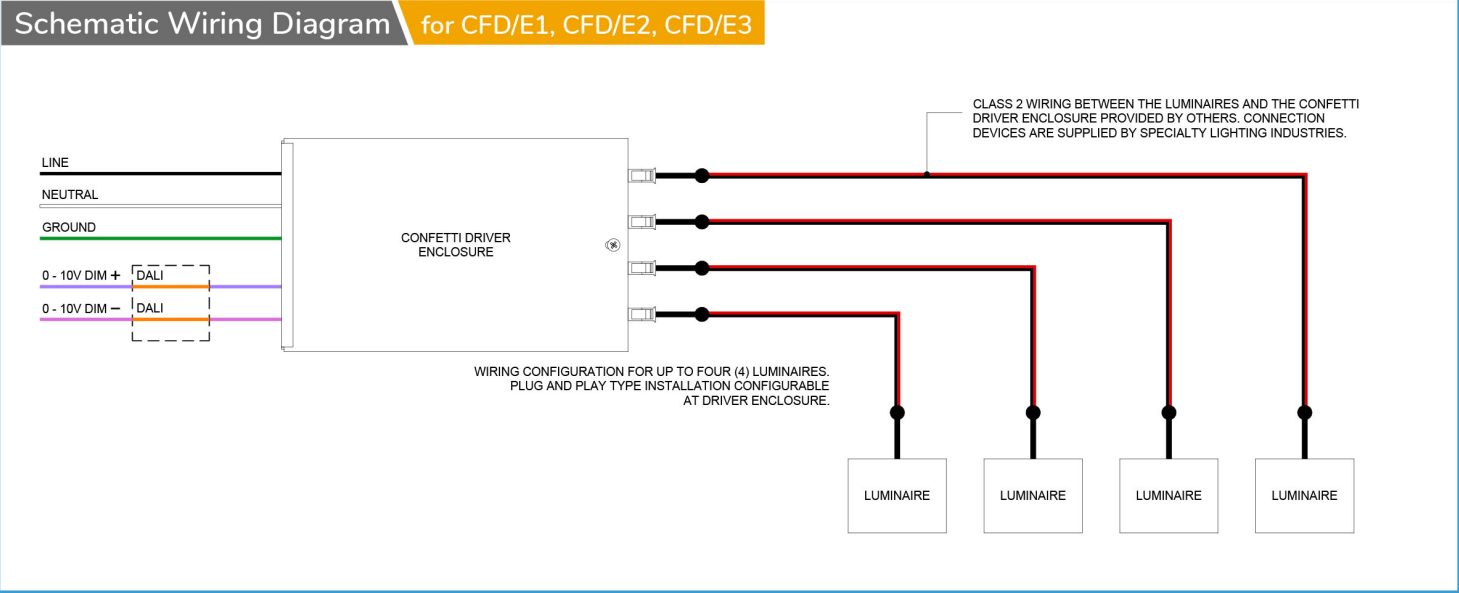

Electrical Configuration and Control

