
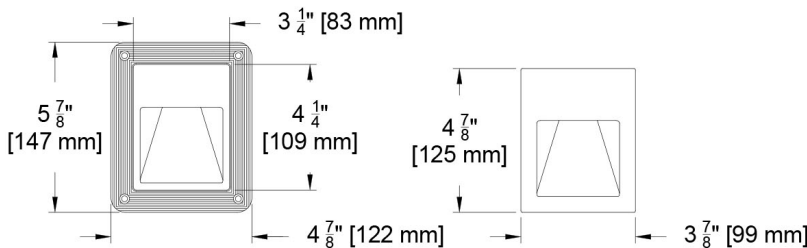


Your path forward is important and Specialty is here to help guide your steps. Our fully dimmable solid state pathway or step light is intended for low level illumination in residential, institutional, commercial or theater applications. The 2102 light is wet location rated for recessed applications in cement, stone or drywall.

PROJECT: TYPE:
SPECIFIER: DATE:

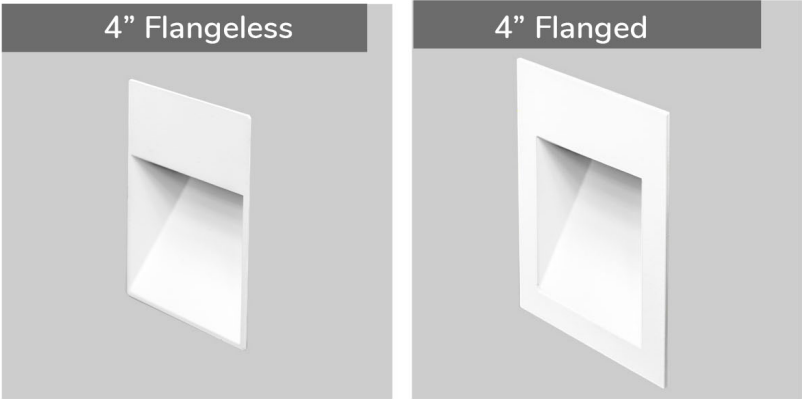

SW-2102 Step Light					
Source	CCT	System watts (W)	Delivered Lumens (Lm)	Lumens/ Watt	Peak (cd)
Specialty A4	2700	4	57	14	74.9
Specialty A4	3000	4	61	15	80.2

Measurements based on 3000K CCT

Key Points (2102)

Trim/Housing

- Flanged or Flangeless installation
- Milled aluminum Housing
- IP54 Wet Location

Source/Optics

- 4w LED array.
- Up to 62 delivered lumens
- <2 MacAdam Steps (<2SDCM)
- 90 + CRI
- Integral, flat, veiling acrylic lens
- 2700K, 3000K, 3500K, 4000K

Driver


- 120 Volt, 60 Hz

Labels

-  US, US tested to UL standards 1598, Wet location

Trim Finish

- 2 color options + Custom color, RAL or wood available

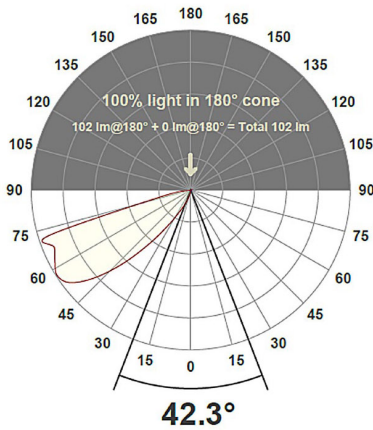

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: 2102-F-A4-27-V4-B




FIXTURE	TRIM	MOUNTING	SOURCE / WATTS	CCT	DRIVER / CONTROL	TRIM FINISH	ACCESSORIES
2102							
Step Light 2102	F Flanged Trim	Flanged Housings	AC4 4W 102Lm 90+CRI, 60+R9 AC LED - Specialty Array	30 3000K	V4 10.0%, (120-120V) 120v line voltage driver	W White Paint 	BABA Compliant BABA Products
	Z Flangeless Trim	Flangeless Housings		27 2700K	C24 UNV (120-277V) C24/C1 *24V Constant Voltage	B Black Paint 	
		PH Plaster Housing		35 3500K	TR2 TruPhase™ 0.1%, (120-120V) log Up to 20W Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only	PXX Specialty Paint Color 	
		PM Panel Mount*				C Custom/RAL Color 	
		CM Concrete Mount				D Wood 	
		*Usually used with Wood Finish option				FINISH GUIDE LINK WOOD TRIM GUIDE	

Wall Cutouts & Dimensions

Step Light

Plaster Mount (PH)




(2102-Z-PH-)

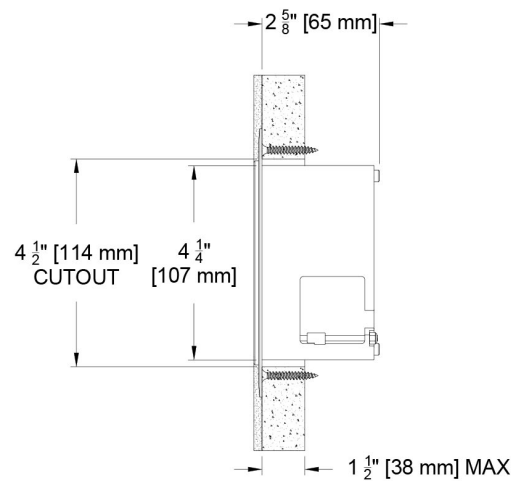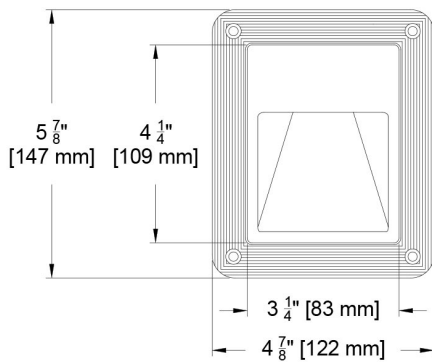

Step Light

Flange Mount (FH)

(2102-F-FH-)

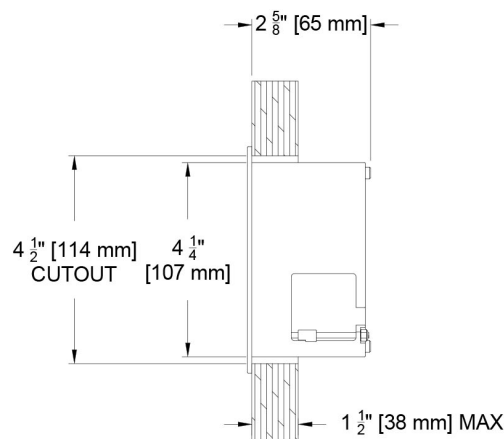

Step Light 2102

3"x 4" portrait orientation




Recessed step or pathway light

Wall Cutouts & Dimensions

Step Light

FlangelessTrim (Z) for Concrete Mount

(2102-Z-CM-)

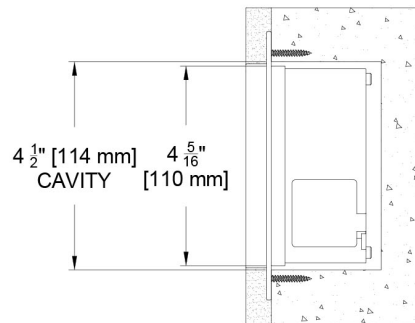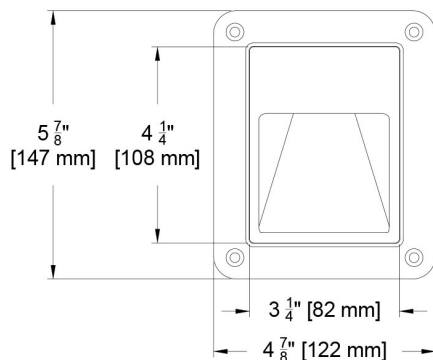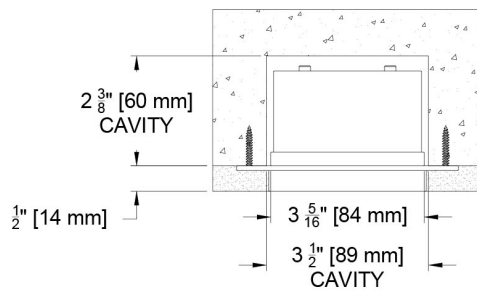

Step Light

FlangelessTrim (Z) for Wood Panel Mount

(2102-Z-PM-)

