Step Light 2102

3"x 4" portrait orientation


Recessed step or pathway light


Your path forward is important and Specialty is here to help guide your steps. Our fully dimmable solid state pathway or step light is intended for low level illumination in residential, institutional, commercial or theater applications. The 2102 light is wet location rated for recessed applications in cement, stone or drywall.

PROJECT: TYPE:

SPECIFIER: DATE:



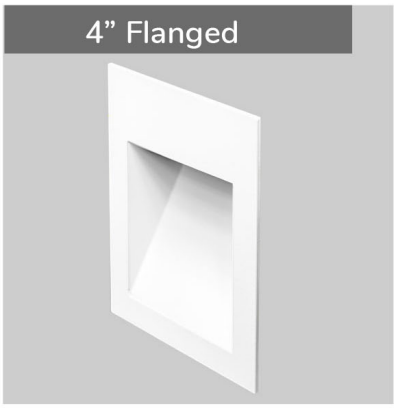

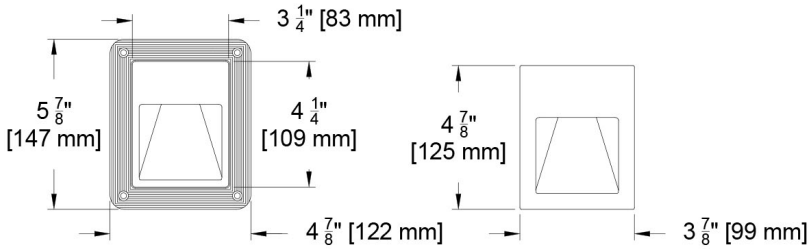

Key Points (2102)

Trim/Housing

- Flanged or Flangeless installation
- Milled aluminum Housing
- IP54 Wet Location

Source/Optics

- 4w LED array.
- Up to 62 delivered lumens
- <2 MacAdam Steps (<2SDCM)
- 90 + CRI
- Integral, flat, veiling acrylic lens
- 2700K, 3000K, 3500K, 4000K

Driver

- 120 Volt, 60 Hz

Labels


- c SP us, US tested to UL standards 1598, Wet location

Trim Finish

- 2 color options + Custom color, RAL or wood available

SW-2102 Step Light					
Source	CCT	System watts (W)	Delivered Lumens (Lm)	Lumens/ Watt	Peak (cd)
Specialty A4	2700	4	57	14	74.9
Specialty A4	3000	4	61	15	80.2

Measurements based on 3000K CCT

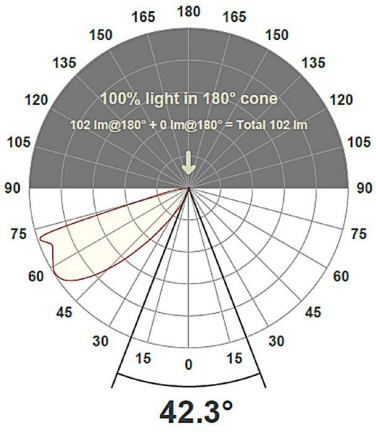

© 2026 Specialty Lighting Industries

NOTE: Last Updated on Wed, Oct 21, 2026 4:39 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Step Light 2102

3"x 4" portrait orientation
Recessed step or pathway light

Ordering Codes

PROJECT: SPECIFIER:

DATE: TYPE: QUANTITY:

Ordering Code Example: 2102-F-A4-27-V4-B

FIXTURE	TRIM	MOUNTING	LUMENS / WATTS	CCT	DRIVER / CONTROL	TRIM FINISH	ACCESSORIES
2102							
Step Light 2102	F Flanged Trim Z Flangeless Trim	**Flanged Housings** FH Flanged Housing **Flangeless Housings** PH Plaster Housing PM Panel Mount* CM Concrete Mount *Usually used with Wood Finish option	AC4 4W 102Lm 90+CRI, 60+R9 AC LED - Specialty Array	30 3000K 27 2700K 35 3500K	V4 10.0%, (120-120V) 120v line voltage driver C24 UNV (120-277V) C24/C1 *24V Constant Voltage TR2 TruPhase™ 0.1%, (120-120V) log Up to 20W Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only	W White Paint B Black Paint PXX Specialty Paint Color P01-P15 C Custom/RAL Color D Wood FINISH GUIDE LINK WOOD TRIM GUIDE	BABA BABA Compliant BABA Products

© 2026 Specialty Lighting Industries


NOTE: Last Updated on Wed, Oct 21, 2026 4:39 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Wall Cutouts & Dimensions


Step Light — Plaster Mount (PH)

(2102-Z-PH-)

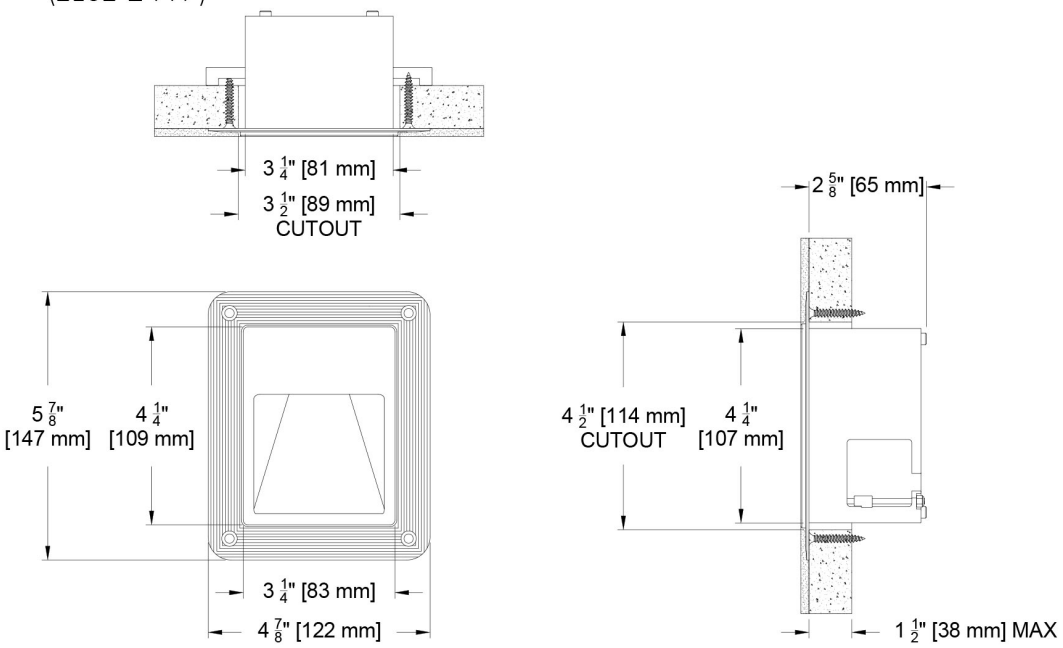

Step Light — Flange Mount (FH)

(2102-F-FH-)

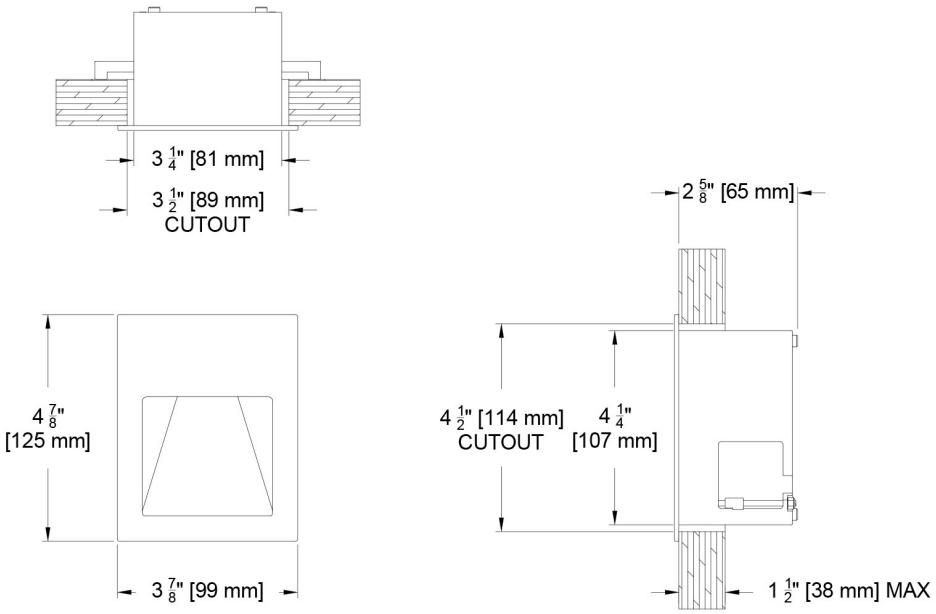


© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:39 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Wall Cutouts & Dimensions


Step Light — FlangelessTrim (Z) for Concrete Mount

(2102-Z-CM-)

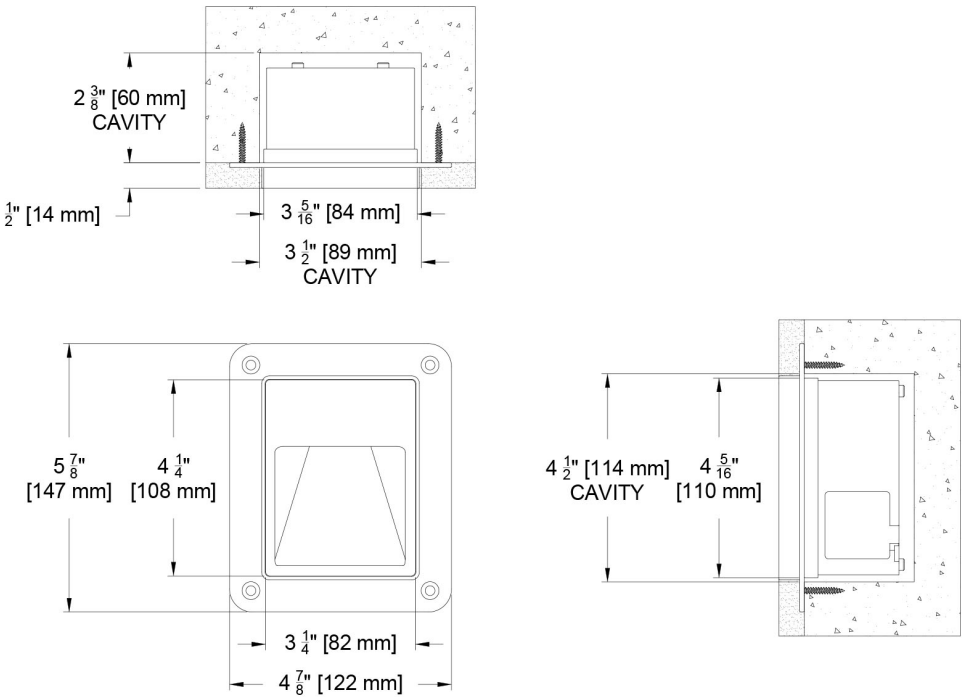

Step Light — FlangelessTrim (Z) for Wood Panel Mount

(2102-Z-PM-)

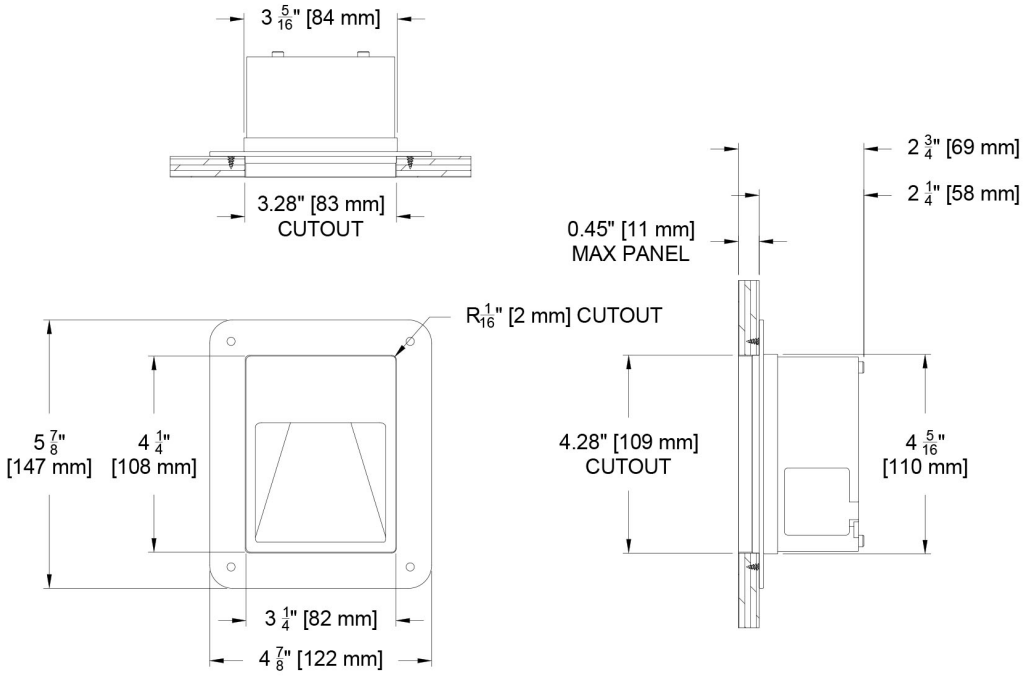

© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:39 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971