





## The Confetti Family

Just like little pieces of paper floating from the sky can create an amazing image in a parade, Confetti™ offers a fun way to deliver light in small packages. The Confetti™ family's array of options include recessed downlights, wallwashers, eyeball adjustables and surface offerings in the form of tiny monopoints and pendants. Have some fun and throw some Confetti™ to light your space.

1" Round WW (Flangeless)

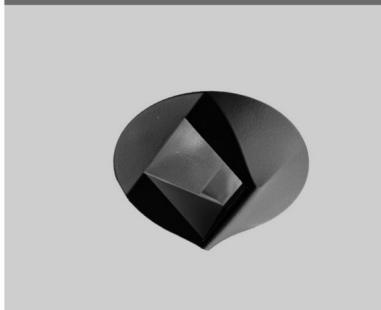

1" Round WW (Flanged)

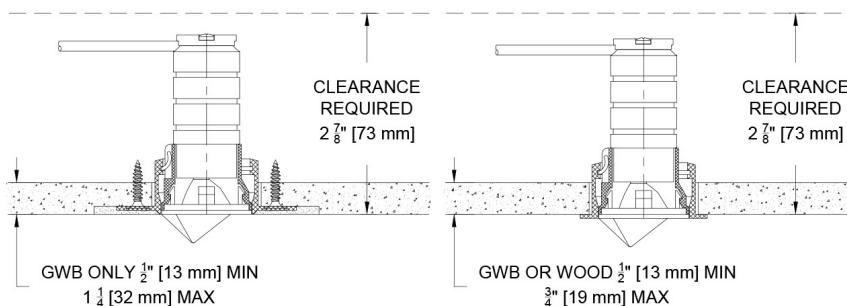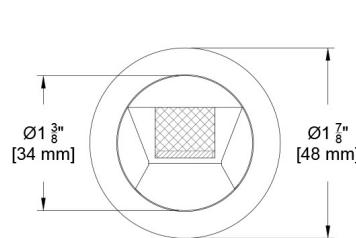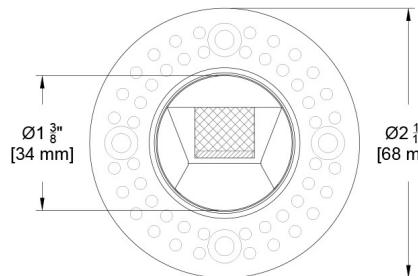

PROJECT:

TYPE:

SPECIFIER:

DATE:

### Key Points (CF1WW-R)

#### Trim

- Distinctive, small 1" round semi-recessed wallwasher.
- Flanged trim features micro-bite wing springs.
- Flangeless and Flanged trims available for retrofit type installation, no housing required.
- Unique design of Flangeless Trim allows for truly flat, smooth ceilings when using the Confetti™ Counter Bore Hole Saw. For optimal installation we recommend this tool. Order under accessories.
- White or Black standard finish for aperture bezel and flanged trims.

#### Housing

- TITLE 24 IC Rated / airtight housing approved for use in direct contact with insulation meeting CA Title 24 requirements.

- CS - listed for Wet Location

- Wire pigtails are CMP rated for plenum use

#### Source / Optics

- Wallwash performance lights to top of wall
- 2700K, 3000K and 3500K available.
- 228 delivered lumens from our very small, 1" aperture.
- <3 MacAdam Steps (<3SDCM) for fixed white
- [View Photometry](#)
- 90 CRI, 60+ R9 Standard

#### Drivers

- Configurable driver box for up to 4 Confetti fixtures on a single remote driver. Can be mixed with other fixtures within the Confetti™ family. Quantity of driver boxes needs to be specified based upon number of fixtures and control zone requirements.
- Remote Universal EldoLED driver, 120-277V
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- 0-10, DALI-2, TruPhase™

# Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: CF1WW-R-WW-F-SG7-30-WW-CFD/E3-2-B-B

Fixture	Aperture	Trim	Source / Watts	CCT	Beam	Driver / Control	Driver Quantity	Bezel Finish	Trim Finish	Accessories
CF1WW-R	WW Wall Wash	Z Flangeless Trim*  F Flanged Trim^	SG7 ● 7W 228Lm* 90+CRI, 50+R9  ● Supports CA Title 24 compliance to JA8 requirements  <a href="#">View Photometry</a>	27 2700K  30 3000K  35 3500K	WW Wall Wash	CFD/E1 0-10° 0.1%, UNV (120-277V) log  CFD/E2 DALI-2° 0.1%, UNV (120-277V) log  CFD/E3 0-10° 0.1%, UNV (120-277V) linear  K No driver required. (CFD box has been specified with another Confetti product)  TR2 TruPhase™ 0.1%, (120-120V) log Up to 20W Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only  * Remote driver only. Maximum 4 fixtures per driver.	# Specify number of drivers  Must specify # of driver boxes based upon control requirements and 1-4 fixtures per driver.  See Electrical Configuration and Control section of cut sheets for details.	B Black Paint  W White	B Black Paint  W White Paint  K Blank for use with Flangeless	CFCBHS Counter Bore Hole Saw for Flangeless Trims  ATH Lutron Athena Wireless Node Must be used with E2 driver  Recommended for proper installation of Flangeless Trims. Only one required per project.




# Ceiling Cutouts and Dimensions

Wall Wash Aperture

## Round Flangeless

### Wall Wash (WW)




(CF1WW-R-Z-CR7)

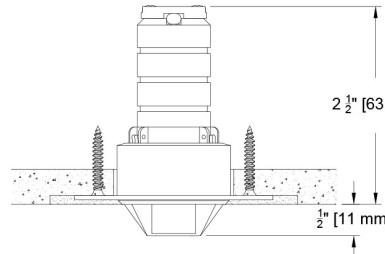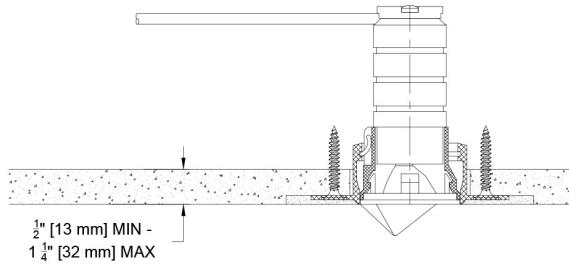

## Round Flanged

### Wall Wash (WW)


(CF1WW-R-F-CR7)

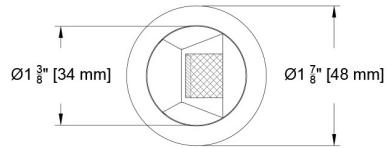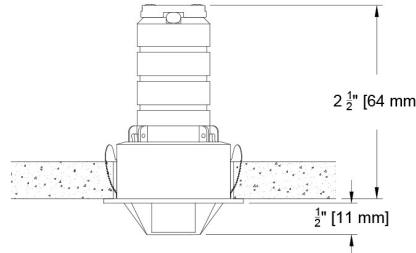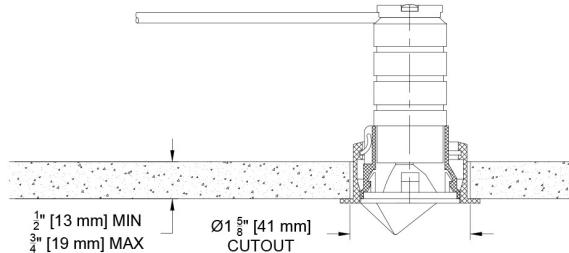

## Flangeless Mount Detail

CFCBHS REQUIRED ALONG WITH POWER DRILL FOR THIS CUTOUT.

SEE ACCESSORIES

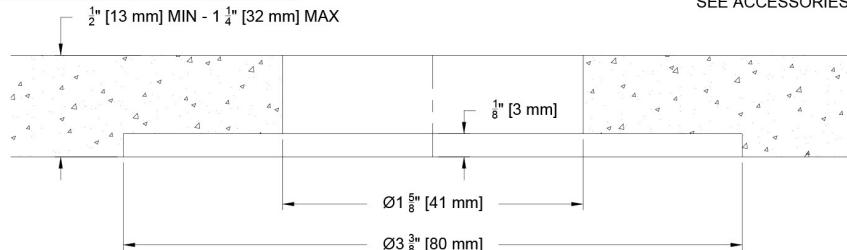



\*Confetti Counter Bore Hole Saw (CFCBHS)

## Photometric Table

All data below are delivered lumens based on goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated nominal flux.

ROUND WW Beamspreads		33°		
Source	System watts (W)	Delivered Lumens (lm)	Lms/ Watt	Peak CD
SG7	8	224	29	535
CCT Multiplier				
CCT	SG7			
2700	1.00			
3000	1.00			

All measurements are delivered lumens based on 3000K unless otherwise noted below.  
Refer to photometry tab on product page for exact ISO cd plot and IES files.





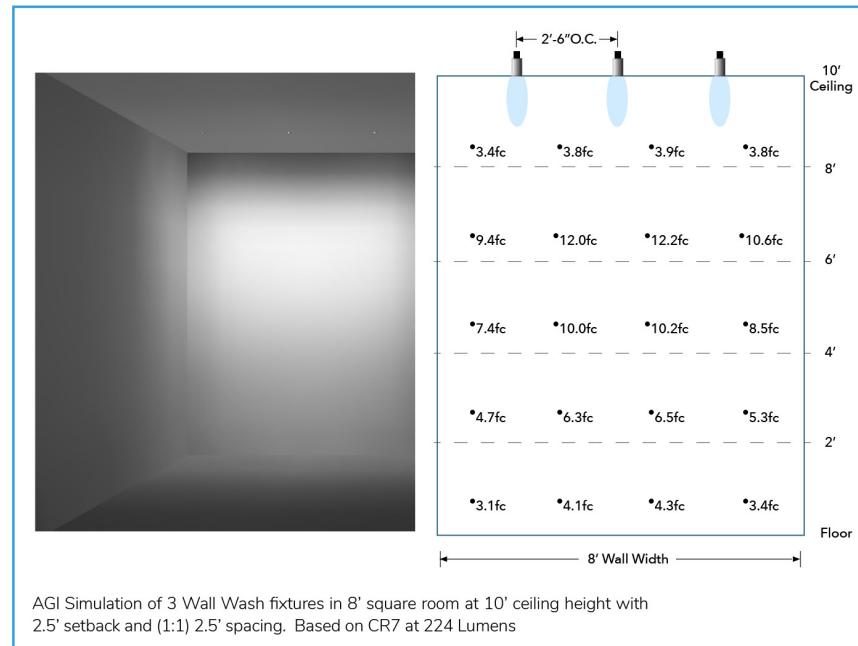
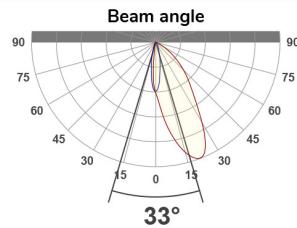


AGI Simulation of 3 Wall Wash fixtures in 8' square room at 10' ceiling height with 2.5' setback and (1:1) 2.5' spacing. Based on CR7 at 224 Lumens

## Color Data

### Specialty Array - SG7


- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1 and 16

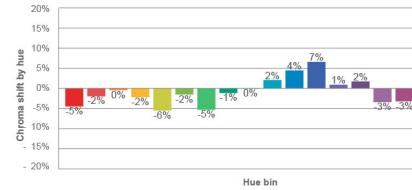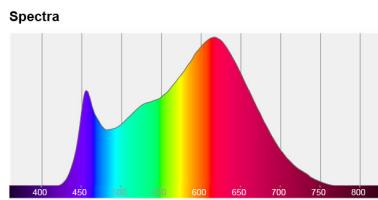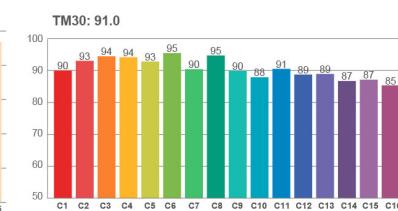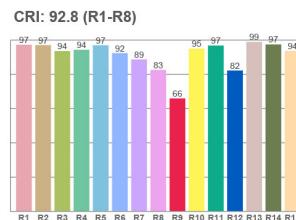


# Electrical Configuration and Control

## Confetti Driver Enclosure for CFD/E1, CFD/E2, CFD/E3


REMOTE MOUNTING REQUIRED

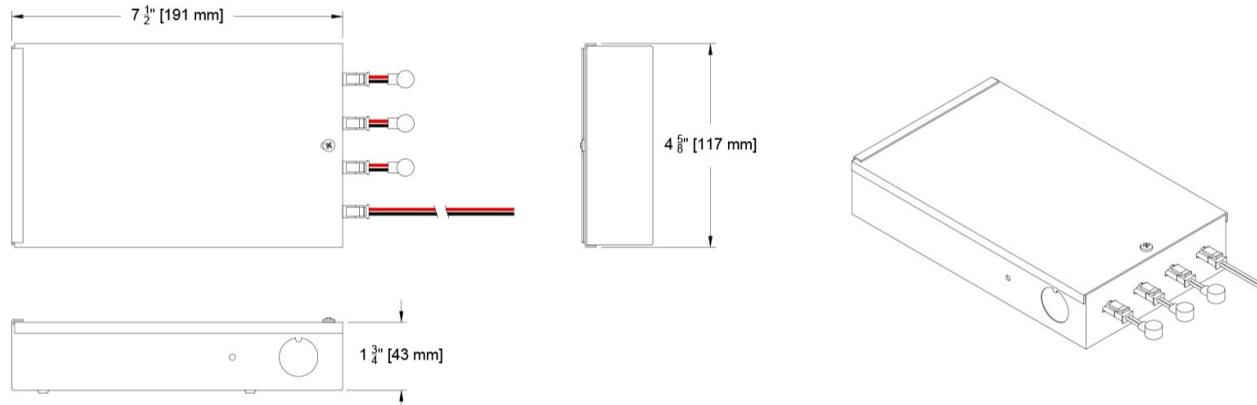

## Schematic Wiring Diagram for CFD/E1, CFD/E2, CFD/E3

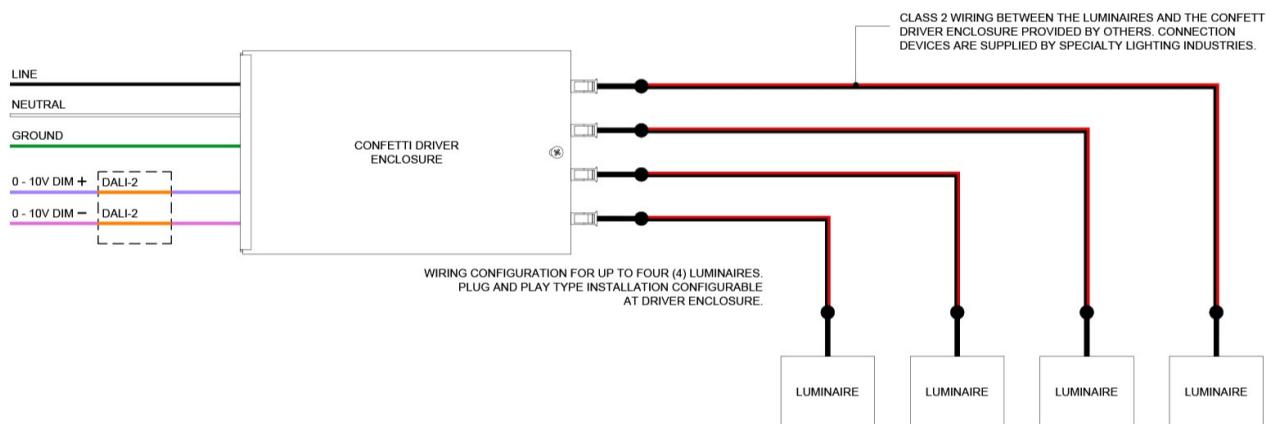

## Electrical Configuration and Control

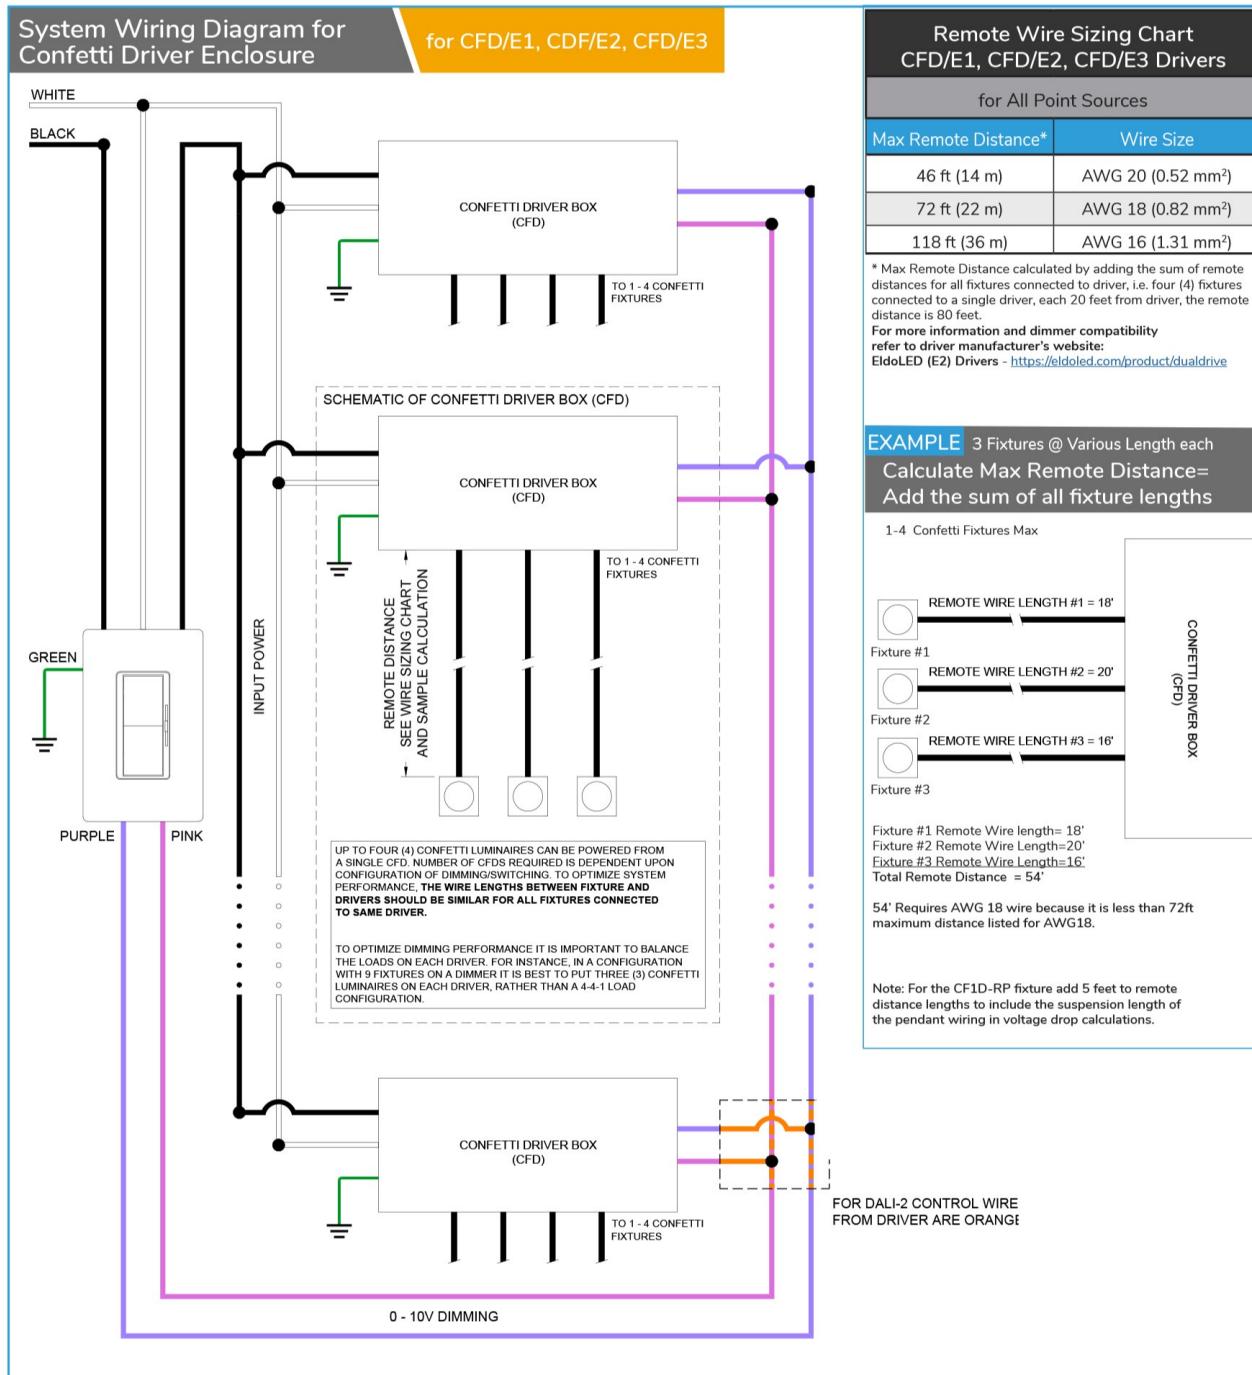

# Electrical Configuration and Control

## System Wiring Diagram for Confetti - TruPhase™ Driver

for TR2

