
# Confetti™ 1" Round Pendant (34mm)


Suspended Accent Pendant


## The Confetti Family


Just like little pieces of paper floating from the sky can create an amazing image in a parade, Confetti™ offers a fun way to deliver light in small packages. The Confetti™ family's array of options include recessed downlights, wallwashers , eyeball adjustables and surface offerings in the form of tiny monopoints and pendants. Have some fun and throw some Confetti™ to light your space.

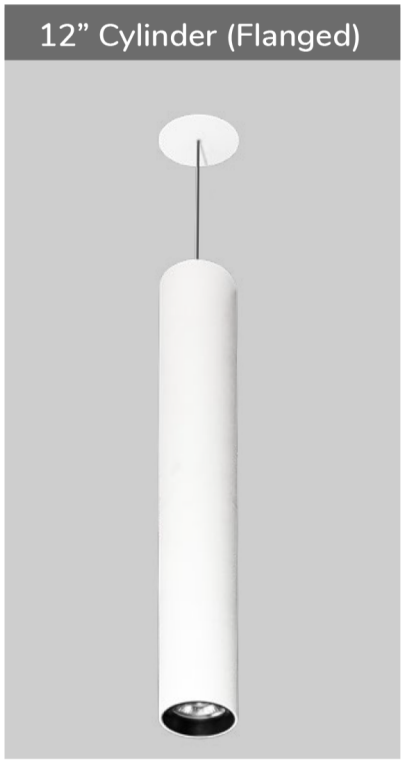



PROJECT: TYPE:

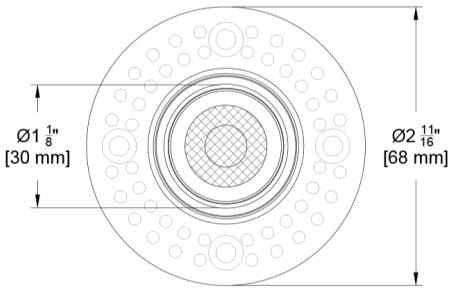SPECIFIER: DATE:
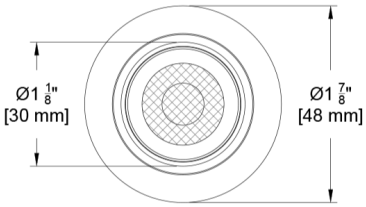
### Key Points (CF1D-RP)

#### Housing

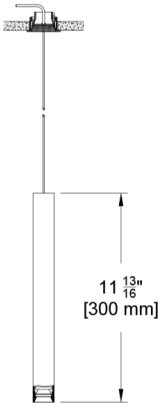- Distinctive, 12" long, 1" diameter fully accent pendant with field cuttable suspension/power cord up to 56" long.
- Flangeless and Flanged trims available for retrofit type installation, no housing required.
- Unique design of Flangeless Trim allows for truly flat, smooth ceilings when using the Confetti™ Counter Bore Hole Saw. For optimal installation we recommend this tool. Order under accessories.
- Flanged trim features micro-bite wing springs.
- White or Black standard finish for housing and flanged trims.
- Trim bezels are black for low brightness and glare control.
- c SP us Listed – Damp
- Wire pigtails are CMP rated for plenum use

#### Source / Optics

- 2700K, 3000K and 3500K available.
- 3 beamspreads available - 30°, 35° and 45°
- Up to 1598 Peak CD
- TITLE 24 JA8 Up to 456 delivered lumens delivered from a distinctive slender form
- <3 MacAdam Steps (<3SDCM) for fixed white
- 90 CRI , 60+ R9 Standard
- View Photometry

#### Drivers

- TruPhase - Dimming down to 0.1% - 120V only
- Configurable driver box for up to 4 Confetti fixtures on a single remote driver. Can be mixed with other fixtures within the Confetti™ family. Quantity of driver boxes needs to be specified based upon number of fixtures and control zone requirements.
- Remote Universal EldoLED driver, 120-277V
- Flicker free to IEEE 1789-2015
- 0-10, DALI-2


© 2026 Specialty Lighting Industries

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Confetti™ 1" Round Pendant (34mm)

Suspended Accent Pendant

specialty lighting industries

# Ordering Codes

PROJECT: SPECIFIER:

DATE: TYPE: QUANTITY:

*Ordering Code Example: CF1D-RP-Z-C6-30-36-CFD/E1-3-B-WHT-K-CFCBHS*

| FIXTURE | TRIM | LUMENS / WATTS | CCT | BEAM | DRIVER / CONTROL | DRIVER QUANTITY | TRIM FINISH | HEAD FINISH | ACCESSORIES |
|---|---|---|---|---|---|---|---|---|---|
| CF1D-RP | | | | | | | | | |
| Confetti™ 1" Round Pendant | Z<br>Flangeless Trim*<br><br>F<br>Flanged Trim^<br><br>* Recommend that CFCBHS tool listed under Accessories be purchased for easy installation. Refer to Ceiling Cutouts and Dimensions for details. Trim finish does not apply to flangeless trims.<br><br>^ Must specify trim finish for flanged trim | Citizen<br>C6<br>6W<br>456Lm*<br>90+CRI, 60+R9<br>Supports CA Title 24 & JA8 Compliance<br>* Based on Deep Regress with 45° beamspread<br>View Photometry | 27<br>2700K<br><br>30<br>3000K<br><br>35<br>3500K | 30<br>Medium<br><br>35<br>Flood<br><br>45<br>Flood | CFD/E1<br>0-10*<br>0.1%, UNV (120-277V) log<br><br>CFD/E2<br>DALI-2*<br>0.1%, UNV (120-277V) log<br><br>CFD/E3<br>0-10*<br>0.1%, UNV (120-277V) linear<br><br>K<br>No driver required. (CFD box has been specified with another Confetti product)<br><br>TR2<br>TruPhase™<br>0.1%, (120-120V) log<br>Up to 20W<br>Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only<br><br>* Remote driver only. | #<br>Specify number of drivers<br><br>Must specify # of driver boxes based upon control requirements and 1-4 fixtures per driver.<br><br>See Electrical Configuration and Control section of cut sheets for details. | B<br>Black Paint<br><br>W<br>White Paint<br><br>K<br>Blank for use with Flangeless | B<br>Black Paint<br><br>W<br>White Paint | CFCBHS<br>Confetti Counter Bore Hole Saw for Flangeless Trims<br><br>Controls<br><br>ATH<br>Lutron Athena Wireless Node<br>*Must be used with E2 driver*<br><br>Recommended for proper installation of Flangeless Trims. Only one required per project. |


© 2026 Specialty Lighting Industries


NOTE: Last Updated on Wed, Oct 21, 2026 4:44 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Ceiling Cutouts and Dimensions


## Round Flangeless | Deep Regress (DR)

(CF1D-RP-DR-Z-C6)

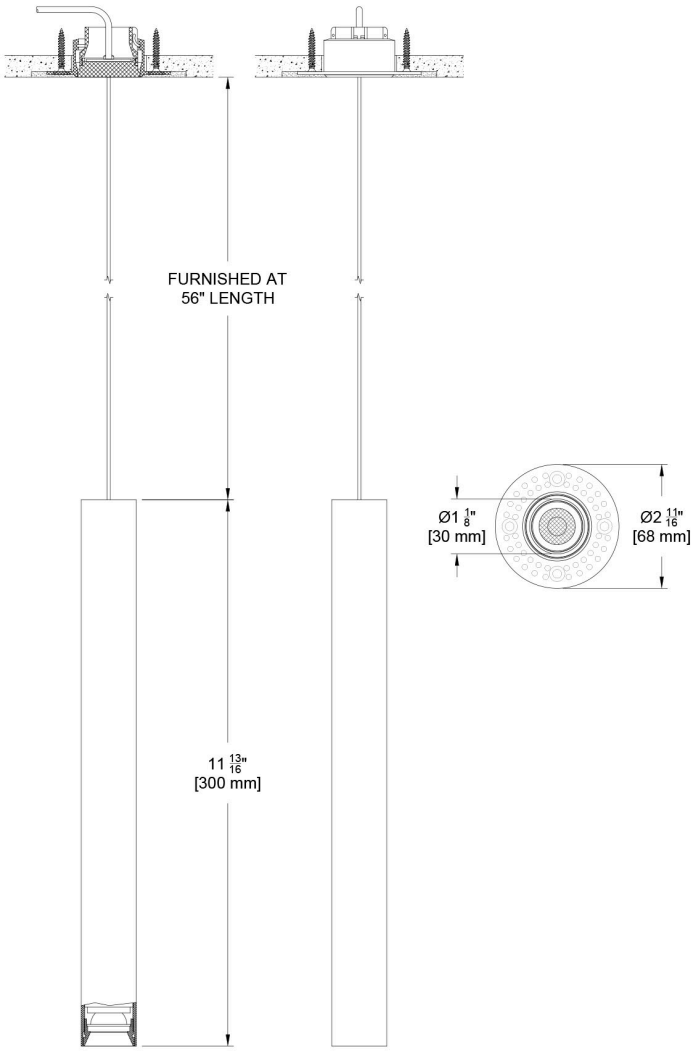



## Round Flanged | Deep Regress (DR)

(CF1D-RP-DR-F-C6)

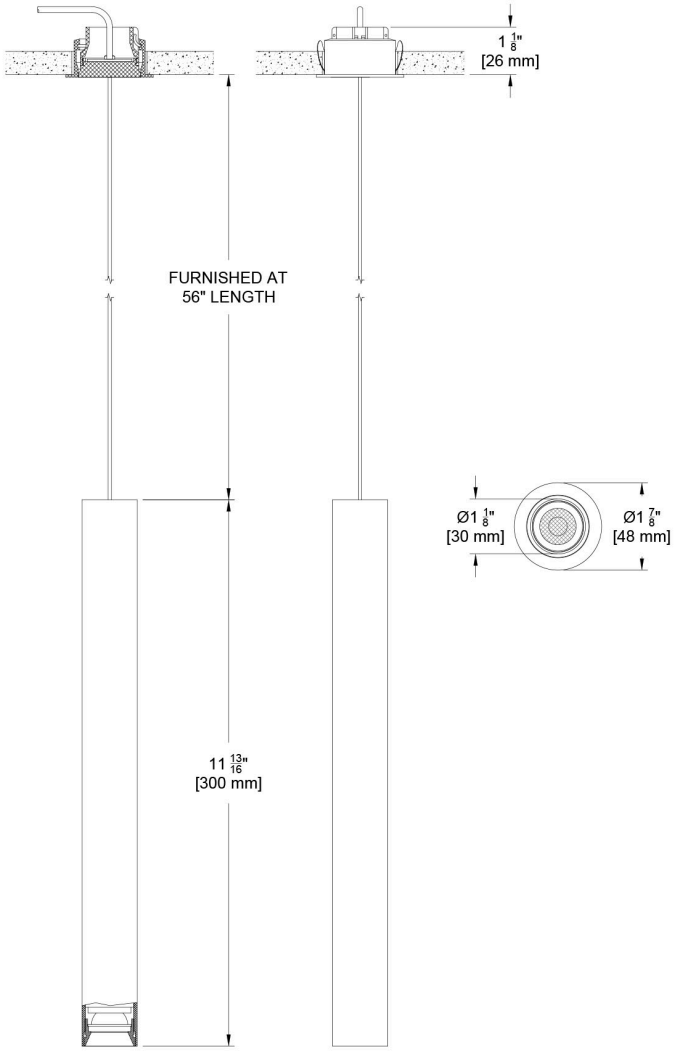


## Flangeless Mount Detail

CFCBHS REQUIRED ALONG WITH POWER DRILL FOR THIS CUTOUT. SEE ACCESSORIES

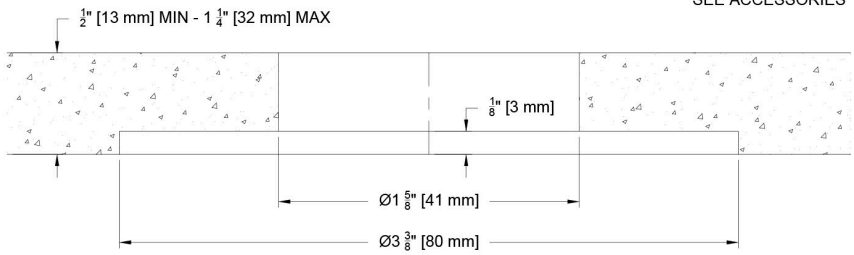




*Confetti Counter Bore Hole Saw (CFCBHS)


© 2026 Specialty Lighting Industries

NOTE: Last Updated on Wed, Oct 21, 2026 4:44 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Confetti™ 1" Round Pendant (34mm)


Suspended Accent Pendant


## Photometric Table


All data below are delivered lumens based on goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated nominal flux.

| ROUND Beamspreads | | | 30° | | | | 36° | | | | 45° | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Source | | System watts (W) | Delivered Lumens (lm) | Lumens/ Watt | Peak CD | 10% Field | Delivered Lumens (lm) | Lms/ Watt | Peak CD | 10% Field | Delivered Lumens (lm) | Lms/ Watt | Peak CD | 10% Field |
| Pendant | C6 | 6 | 451 | 72 | 1598 | 50° | 448 | 71 | 1195 | 56° | 456 | 72 | 780 | 66° |

| CCT Multiplier | |
|---|---|
| CCT | Citizen |
| 2700 | 0.95 |
| 3000 | 1.00 |
| 3500 | 1.02 |
| 4000 | 1.03 |

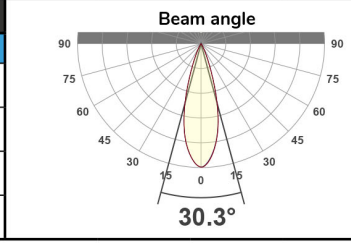

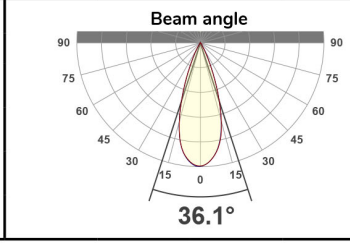
All measurements are delivered lumens based on 3000K unless otherwise noted below.
ISO cd Plots based on Pendant with C6 Source.
Refer to photometry tab on product page for exact ISO cd plot and IES files.

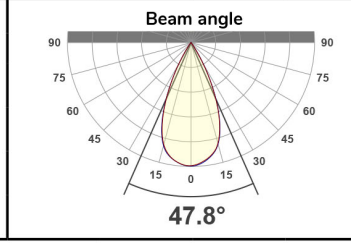

© 2026 Specialty Lighting Industries




Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971


# Color Data


All Color information is based on goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer data range as listed on their datasheet.


## Citizen Source - C6


- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1 and 16







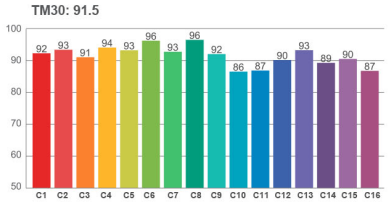
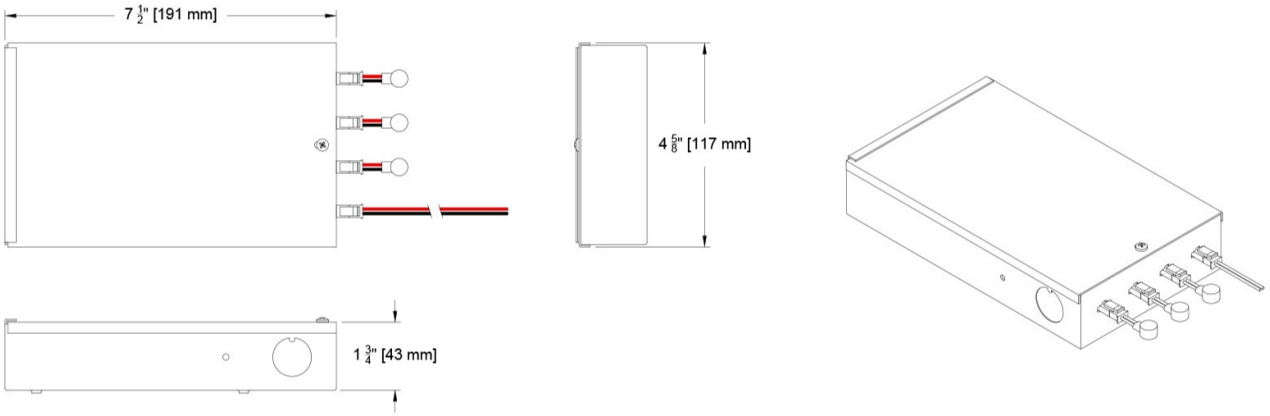


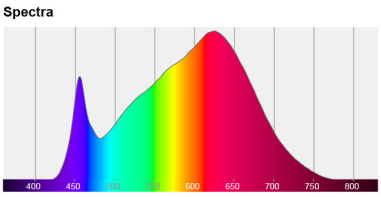© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:44 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971


# Electrical Configuration and Control

## Confetti Driver Enclosure for CFD/E1, CFD/E2, CFD/E3

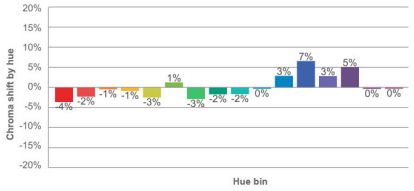REMOTE MOUNTING REQUIRED




## Schematic Wiring Diagram for CFD/E1, CFD/E2, CFD/E3

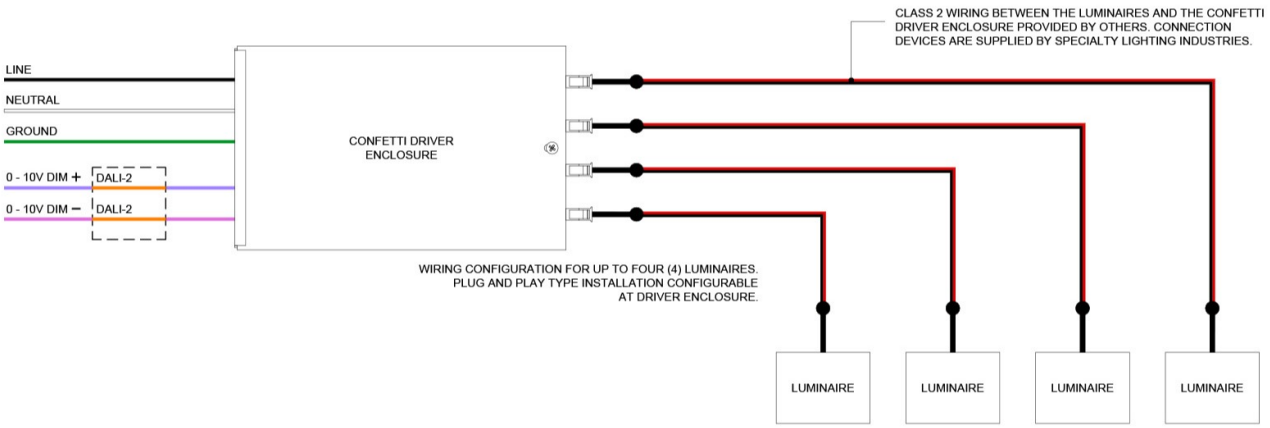




© 2026 Specialty Lighting Industries

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Electrical Configuration and Control

## System Wiring Diagram for Confetti Driver Enclosure

for CFD/E1, CDF/E2, CFD/E3

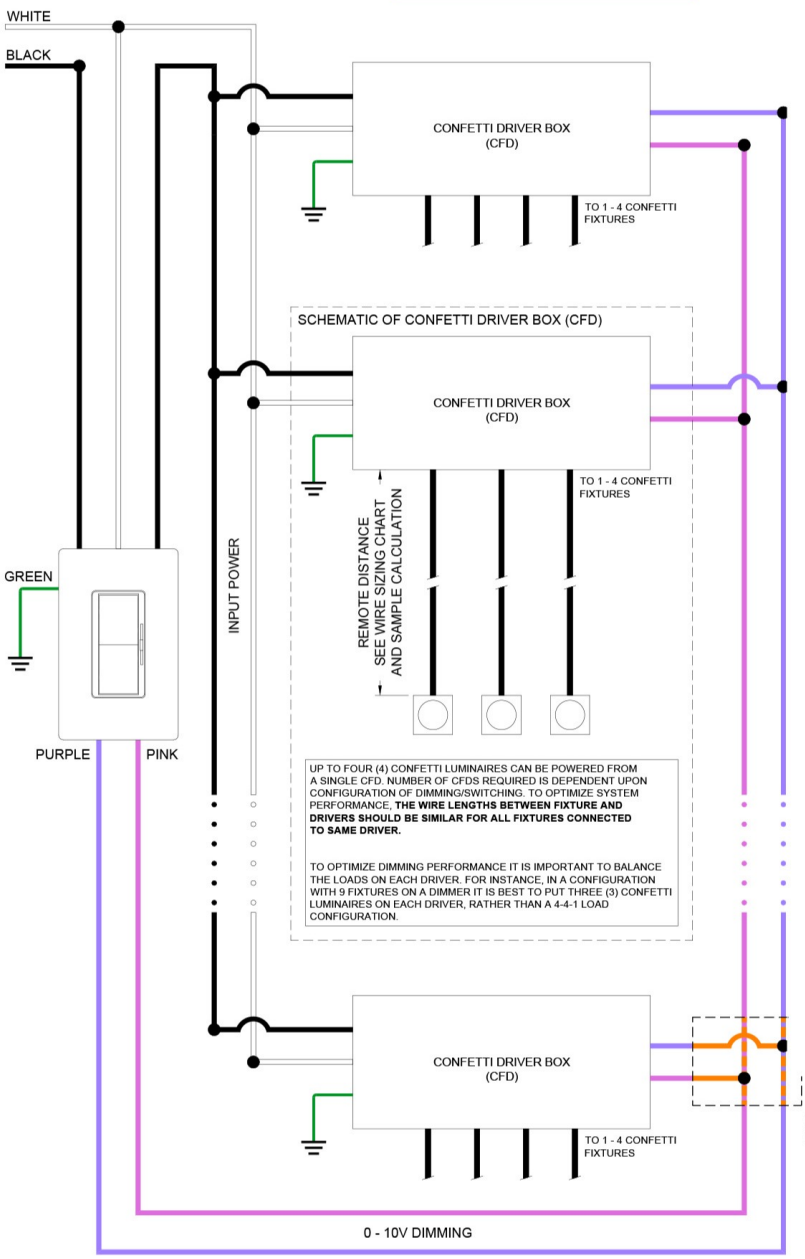


## Remote Wire Sizing Chart CFD/E1, CFD/E2, CFD/E3 Drivers

for All Point Sources


| Max Remote Distance* | Wire Size |
|---|---|
| 46 ft (14 m) | AWG 20 (0.52 mm²) |
| 72 ft (22 m) | AWG 18 (0.82 mm²) |
| 118 ft (36 m) | AWG 16 (1.31 mm²) |

* Max Remote Distance calculated by adding the sum of remote distances for all fixtures connected to driver, i.e. four (4) fixtures connected to a single driver, each 20 feet from driver, the remote distance is 80 feet.
**For more information and dimmer compatibility refer to driver manufacturer's website:**
**EldoLED (E2) Drivers** - https://eldoled.com/product/dualdrive

**EXAMPLE** 3 Fixtures @ Various Length each

**Calculate Max Remote Distance= Add the sum of all fixture lengths**

1-4 Confetti Fixtures Max

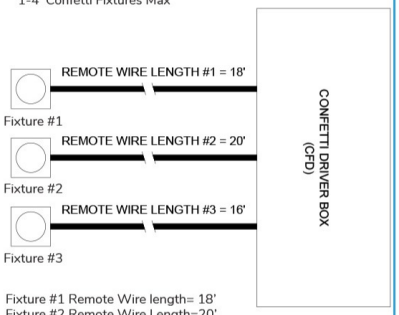


Fixture #1 Remote Wire length= 18'
Fixture #2 Remote Wire Length=20'
Fixture #3 Remote Wire Length=16'
Total Remote Distance = 54'


54' Requires AWG 18 wire because it is less than 72ft maximum distance listed for AWG18.

Note: For the CF1D-RP fixture add 5 feet to remote distance lengths to include the suspension length of the pendant wiring in voltage drop calculations.


© 2026 Specialty Lighting Industries

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Electrical Configuration and Control

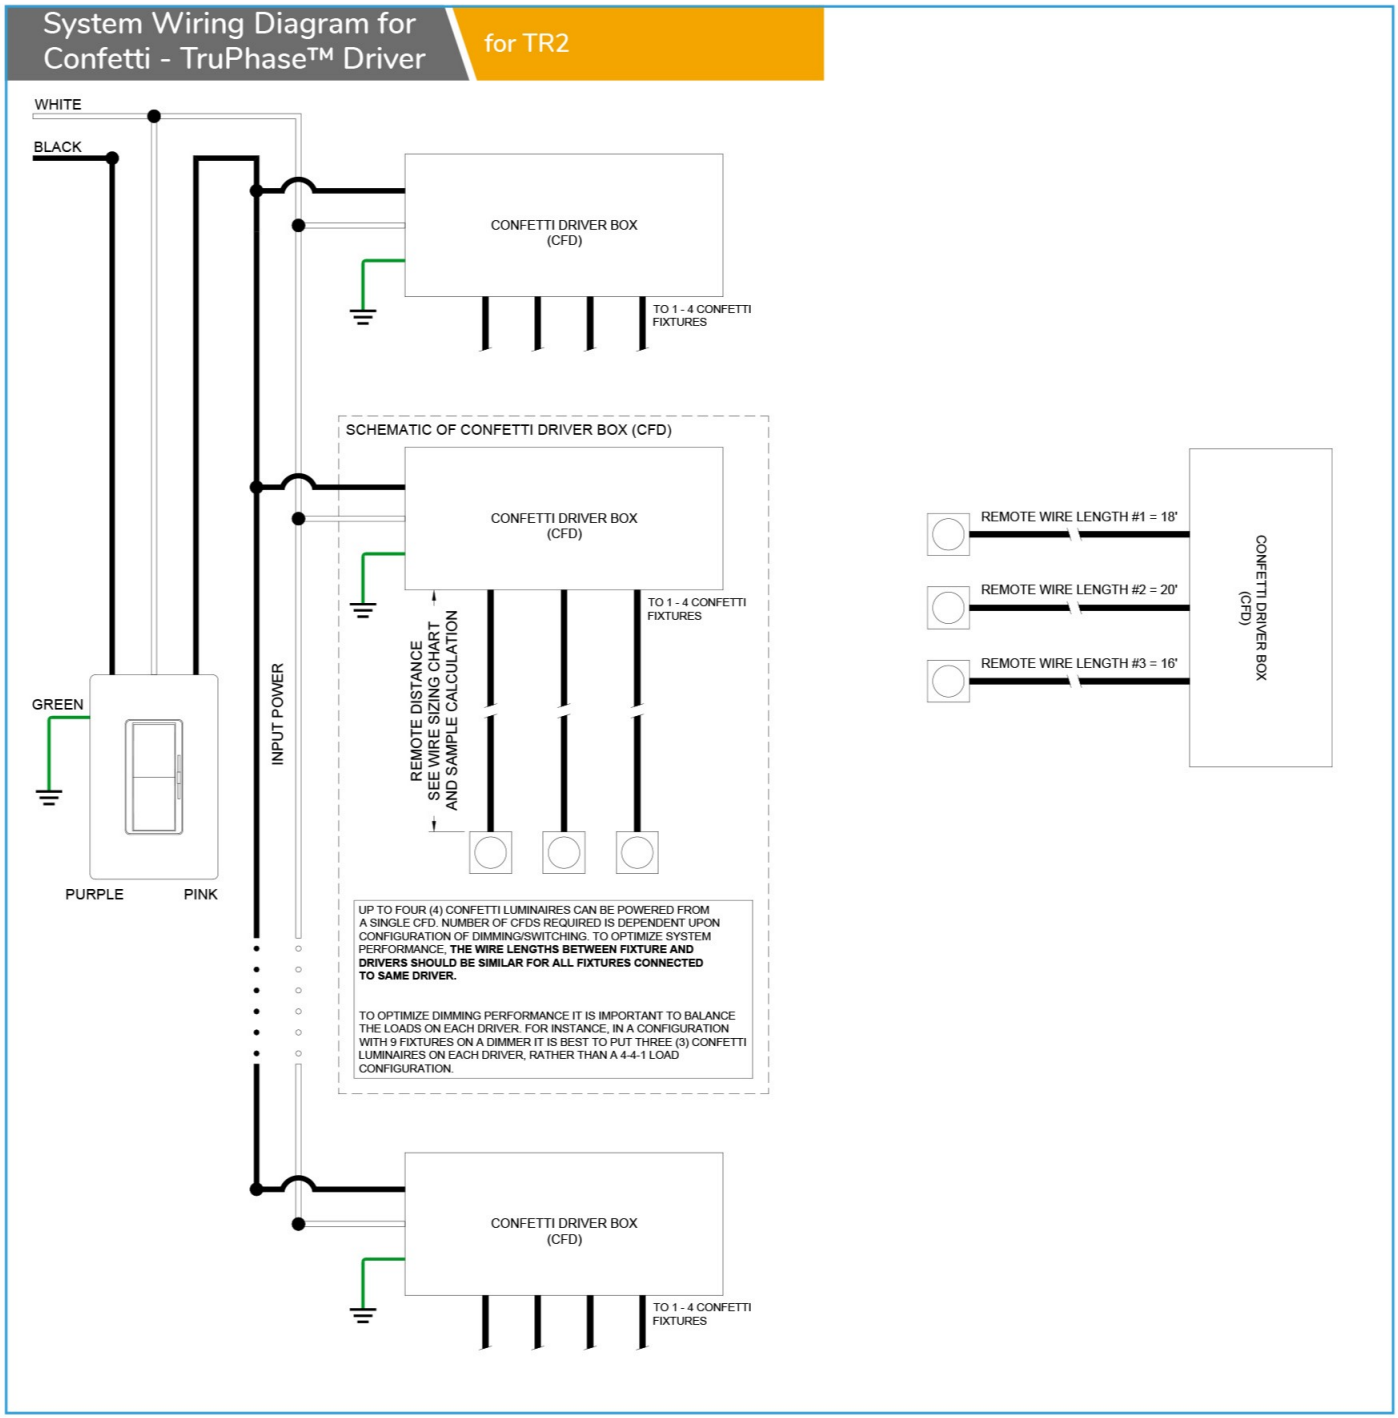



© 2026 Specialty Lighting Industries

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971