


The Core Family

Welcome to the Core surface/pendant mounted square wall wash. With the popularity of open ceilings, we believe a wall wash option is important. Offering 3 different housing lengths, 3 mounting types and 14 paint finish options, the wall wash provides a 3.7:1 illumination ratio from top to bottom of the wall. This fixture deploys the same optical system as the Core recessed wall wash and offers most of the same source and driver options of the other Core fixtures to allow mixing of recessed and surface as necessary.

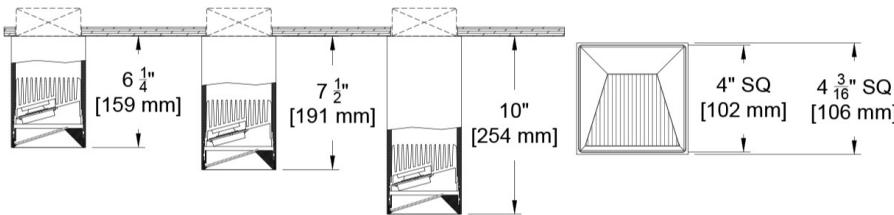

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CR4CWW-SF)

Housing

- 3 height selections - 6", 7.5" and 10"
- 3 mounting options - Surface, Jbox or Stem/Pendant
- JBox mounting allows conduit pass through
- 14 color options + custom RAL available
- Precision die formed, heavy gauge aluminum

Source / Optics

- Up to 832 delivered lumens
- <2 MacAdam Steps (<2SDCM) for fixed white
- 90 CRI, 60+ R9 Standard- 95 CRI 90+R9 Optional with Ambient Dim
- 2400K, 2700K, 3000K, 3500K, 4000K Ambient Dim, RGBW & Tunable White options

Driver


- Universal 120-277V
- Prewired and integral to housing in some configurations
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control

Labels

-  Listed – Damp location

-  Compliant to JA8 with C14 source selection

Mounting Options

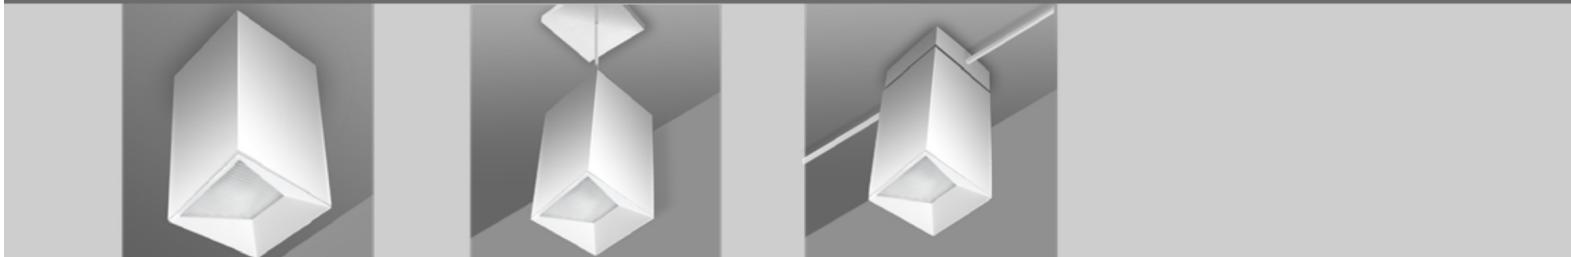

6" | 7" | 10" Wall Wash (WW)
Surface Mount

6" | 7" | 10" Wall Wash (WW)
Pendant Mount

6" | 7" | 10" Wall Wash (WW)
Junction Box w/Pass Through

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: CR4CWW-SF-JB-B-7-C14-30-C1-P14

| Fixture | Mounting | Length | Height | Source / Watts | CCT | Driver / Control | Housing Finish | Accessories |
|-----------|--|---|--|---|---|--|---|---|
| CR4CWW-SF | SM Surface Mount* JB J Box mount^ STM Stem Mount *Recessed Jbox supplied by others ^Surface Jbox cover crafted, finished and supplied by Specialty | B Blank - use for surface or jbox mount - Stem Length - Specify in inches or mm *Remote driver required ^Integral driver for C1, C2 and LP - others remote | 6 6" housing height* 7 7.5" housing height^ 10 10" housing height^ | Citizen C14   14W 679Lm** 90+CRI, 60+R9 Tunable T14 90+CRI, 60+R9 Tunable White T20   21W 90+CRI, 60+R9 Tunable White RGBW 90+CRI, 60+R9 Ambient Dim™ A14 15W 461Lm 95+CRI, 90+R9 A20   21W 858Lm 95+CRI, 90+R9   California Title 24 Compliant to JA8 | 24 2400K 30 3000K 35 3500K 40 4000K 27 2700K Tunable TW1840 1800-4000K Tunable White w/ E1, E2, E3, E4 TW2765 2700-6500K Tunable White w/ E1, E2, E3, E4 RG1280 1200-8000K RGBW Dynamic Color Changing *Requires E2 or E4 | C1 0-10 1.0%, UNV (120-277V) linear C2 ELV/Triac 1.0%, (120V) linear E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear E4^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1 | W White Paint  B Black Paint  PXX Specialty Paint Color*  C Custom/RAL*  | EM Emergency Pack Controls LR Lutron Wireless RF PowPak ATH Lutron Athena Wireless Node Must be used with E2 driver CA Casambi Wireless BLE to be paired with driver |


*See Specialty Finish Guide

Ceiling Cutouts and Dimensions

6" Fixed Box Wall Wash

Surface Mount (SM)


(CR4C-SF-WW-SM-B-6)

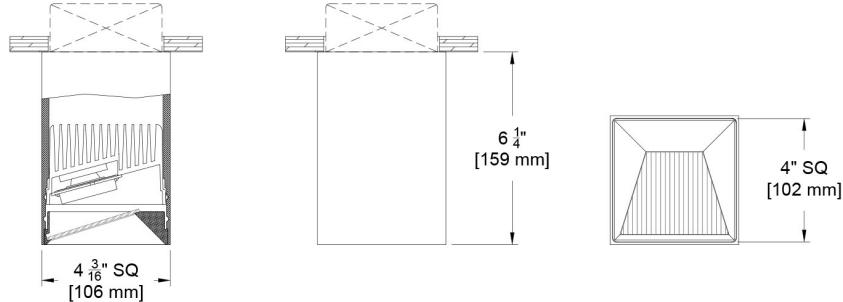

6" Fixed Box Wall Wash

Junction Box (JB)


(CR4C-SF-WW-JB-B-6)

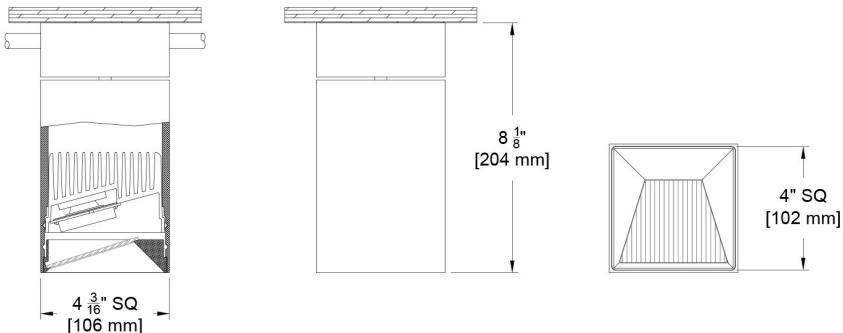

6" Fixed Box Wall Wash

Stem / Pendant Mount (STM)


(CR4C-SF-WW-STM-XX"-6)

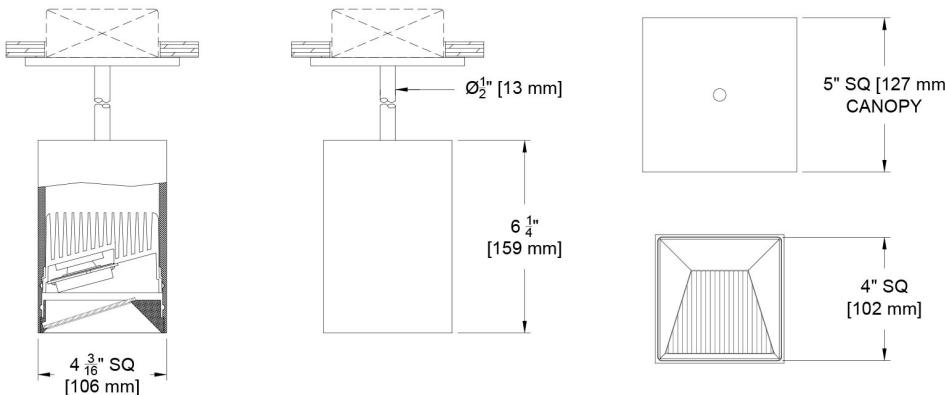

Ceiling Cutouts and Dimensions

7" Fixed Box Wall Wash


(CR4C-SF-WW-SM-B-7)

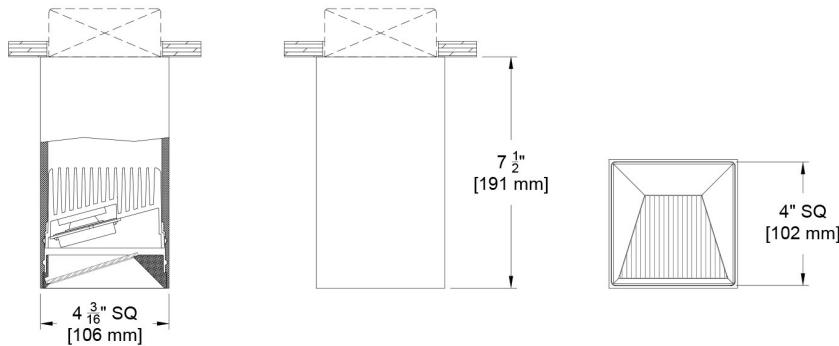

Surface Mount (SM)

7" Fixed Box Wall Wash

(CR4C-SF-WW-JB-B-7)

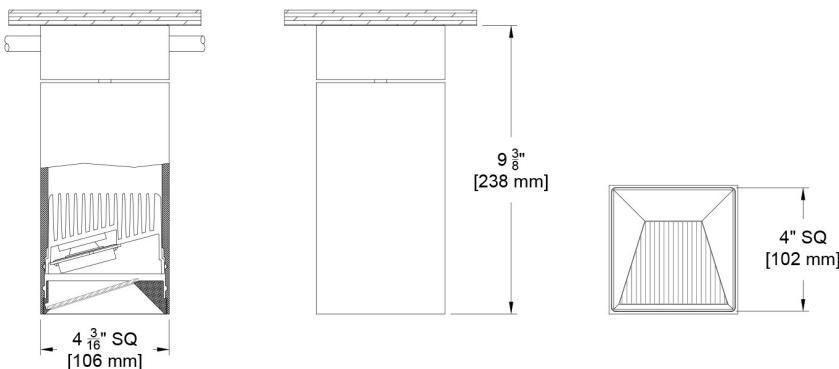


Junction Box (JB)

7" Fixed Box Wall Wash

Stem / Pendant Mount (STM)

(CR4C-SF-WW-STM-XX"-7)

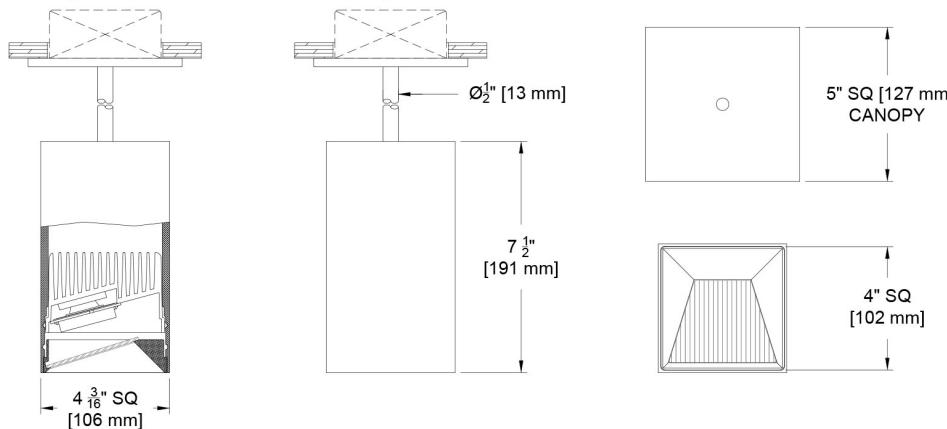


Ceiling Cutouts and Dimensions

10" Fixed Box Wall Wash

Surface Mount (SM)


(CR4C-SF-WW-SM-B-10)

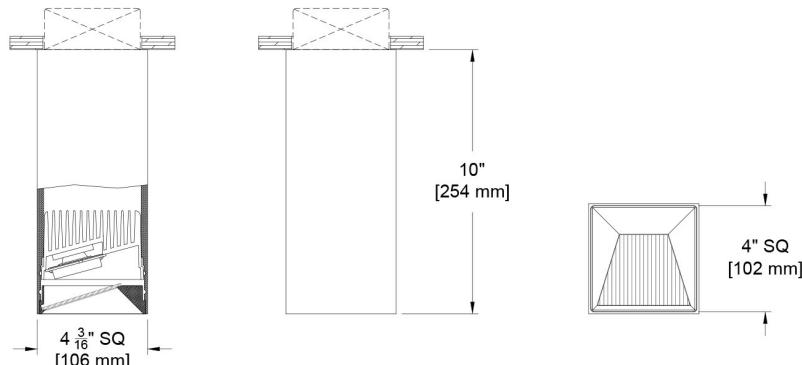

10" Fixed Box Wall Wash

Junction Box (JB)


(CR4C-SF-WW-JB-B-10)

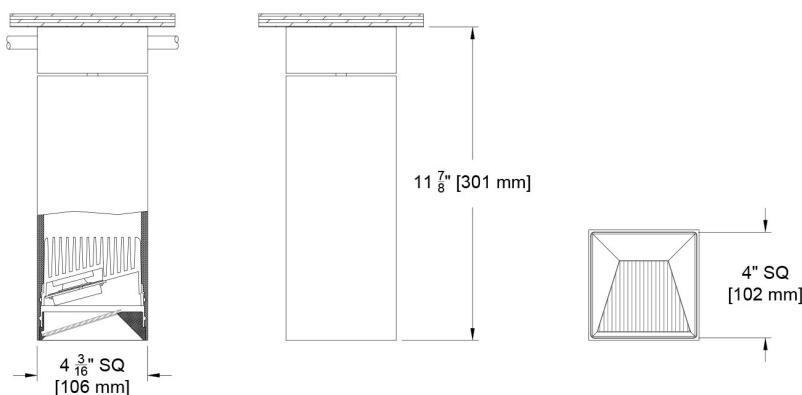

10" Fixed Box Wall Wash


Stem / Pendant Mount (STM)

(CR4C-SF-WW-STM-XX"-10)

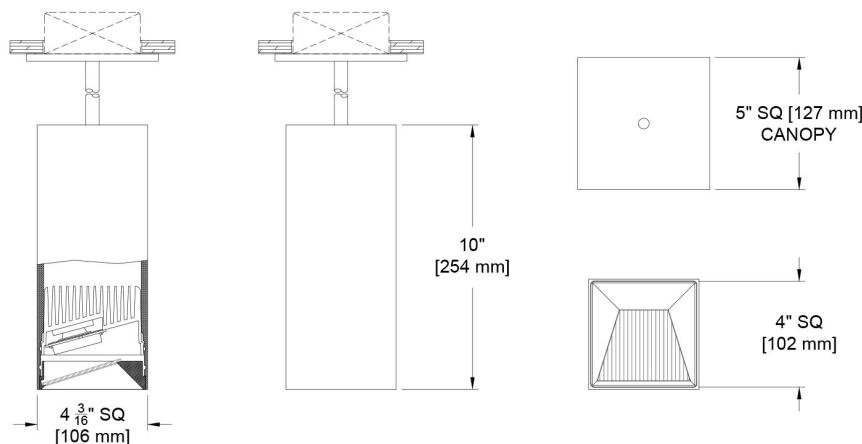


Ceiling Cutouts and Dimensions

Driver Enclosure for Remote Driver for C1, C2, E1, E2, E3, TR2

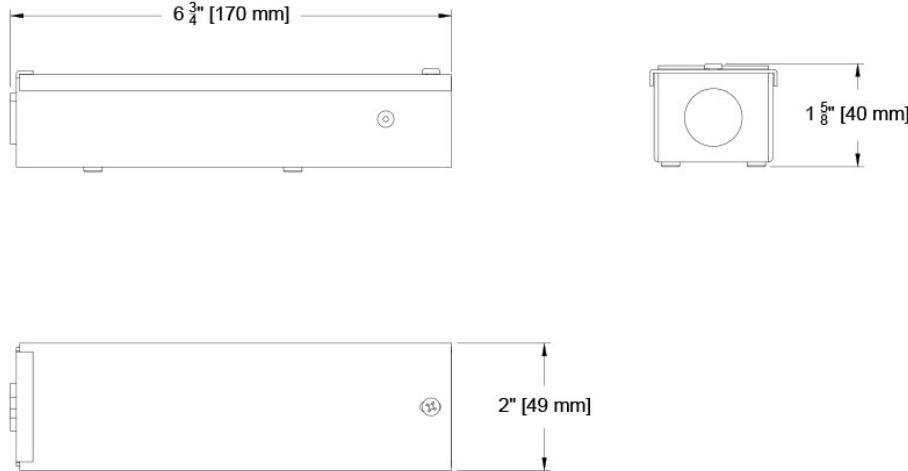

Driver Enclosure for Remote Driver for E4, LD


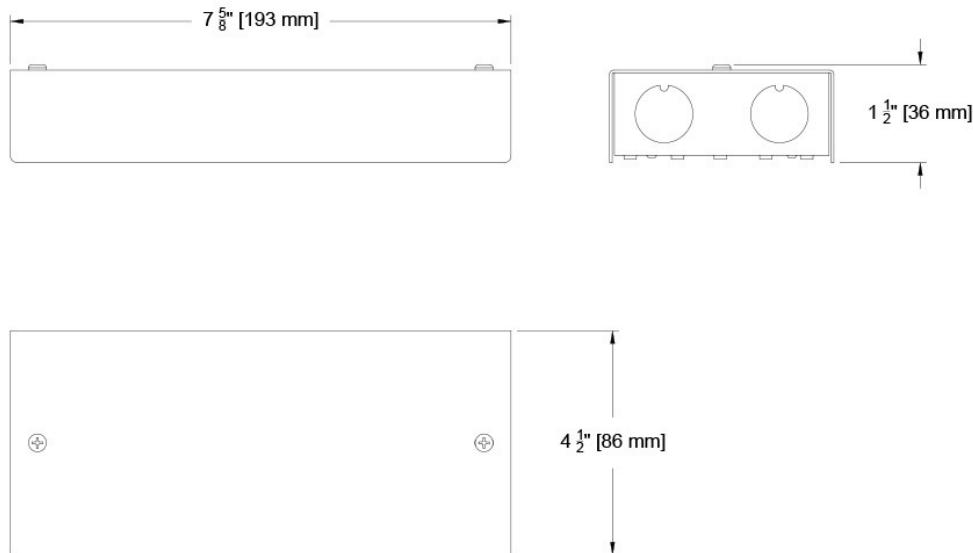


Photometric Table

All data is from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT. Ambient dim at full output.

Photometrics are based on the recessed wall wash (CR4WW-SF). You will need to set the height of the IES file within your calculation based on the mounting method and length of product selected.


| SQUARE Wall Wash (CR4WW-SF) | | | |
|--|------------------|-----------------------|--------------|
| Source | System watts (W) | Delivered Lumens (lm) | Lumens/ Watt |
| Citizen C14 | 14 | 679 | 49 |
| Citizen C20 | 21 | 832 | 40 |
| Ambient Dim A14 | 15 | 461 | 31 |
| CCT Multiplier | | | |
| CCT | Citizen | | |
| 2700 | 0.95 | | |
| 3000 | 1.00 | | |
| 3500 | 1.02 | | |
| 4000 | 1.03 | | |
| Measurements are delivered Lumens based on 3000k from recessed wall wash fixture (CR4WW-SF). | | | |

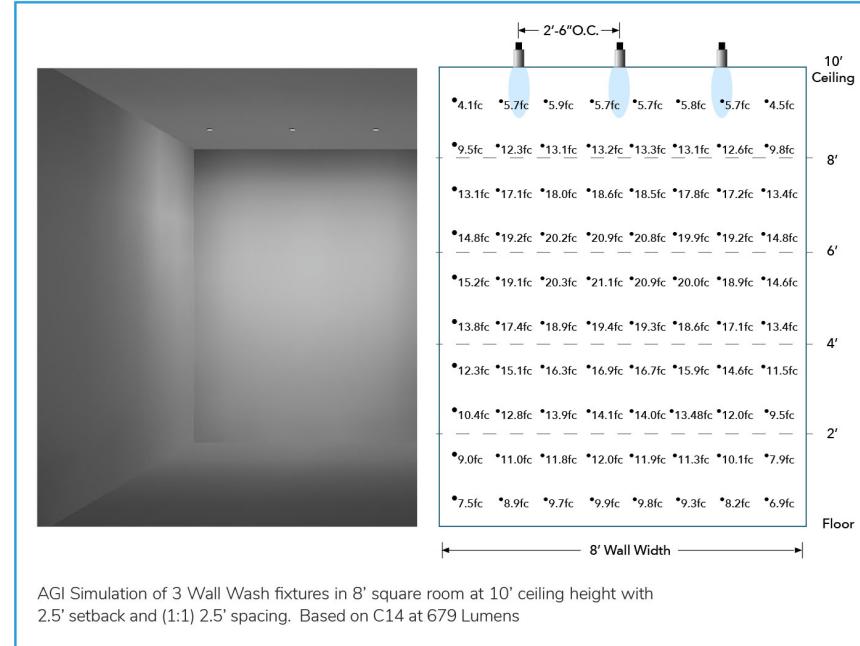

Color Data

Citizen Sources - C14 and C20

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

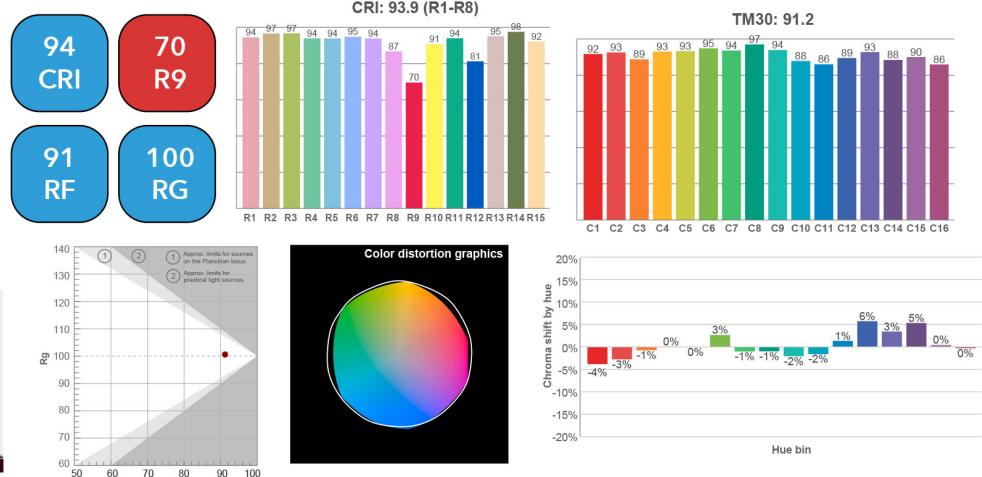

Ambient Dim - 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

