
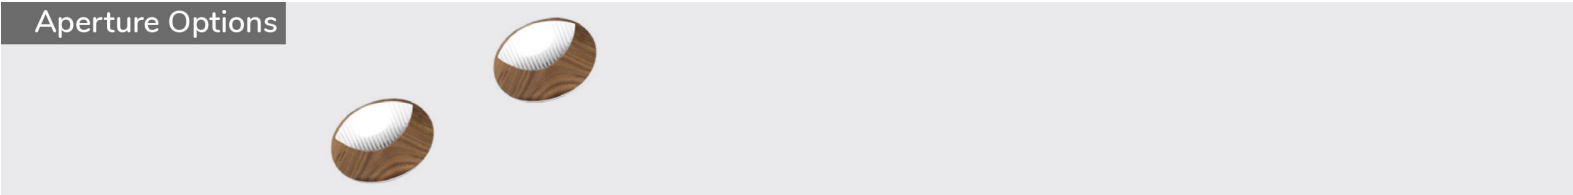


Core 4" Round Double Wall Wash - (102mm - 8" on center)

Formerly known as 1250WW-2MDL
Recessed Fixed Multiple Aperture

The Core Family

When one wall wash is not enough, you can make it a double. Need more light, or savings on installation costs, this 8" on center dual aperture fixture delivers a rich diversity of technical and aesthetic options including field configurable wall wash orientations for adjacent or opposite walls, over 14 finishes including custom wood trims, flux and source selections featuring 90+ CRI fixed white and our world class Ambient Dim (Warm Dim), a 3.7:1 uniformity ratio from top to bottom of wall and a plethora of driver and control choices. The Core Wall Wash is created on a platform allowing a high degree of modification, so if you don't see what you are looking for, just ask for it.

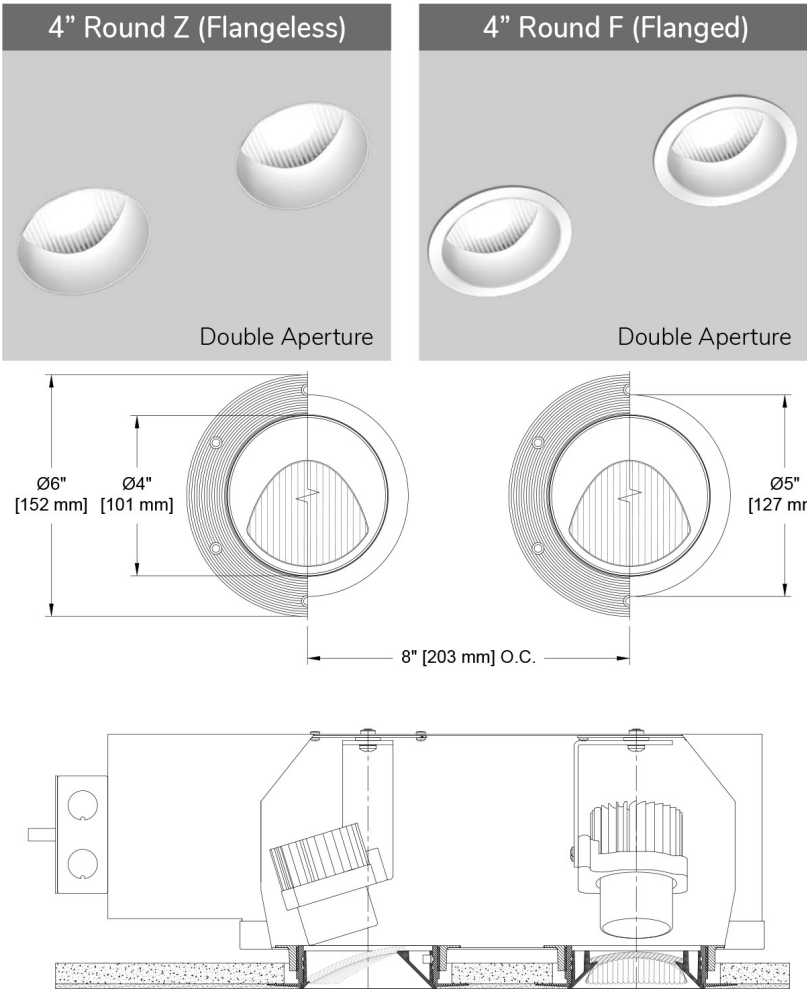

Wood Trim Available

ROUND WW (CR4WW-RF)		35.6°		ISO cd Plot	CCT Multiplier	
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt			
Citizen C14	14	833	60		2700	.95
Citizen C20	20	1056	53		3000	1.00
Citizen C28*	31	1616	53		3500	1.02
Ambient Dim A14	14	578	40		4000	1.03

All data based on single aperture at 3000k. See Multipliers for other CCT. Ambient Dim based on 3000k at full output. *C28 requires active cooling and cannot be used with IC housing or Chicago Plenum

PROJECT: TYPE:
SPECIFIER: DATE:

Key Points (CR4MWW-RMDL)

- Trim
- Trim and light engine can be field adjusted 358° to wash adjacent or oppsite walls or objects
 - Flanged or Flangeless
 - 14 color options + custom RAL or wood available
 - One-piece die cast aluminum or machined wood trim
 - Plaster Mount has plaster flange and lip

- Source / Optics
- Wall wash achieves a uniform 3.7:1 ratio from top to bottom of 10' wall
 - Over 3200 lumens delivered with both apertures and C28 source selection
 - <2 MacAdam Steps (<2SDCM) for fixed white
 - 90 CRI , 60+ R9 Standard- 95 CRI 90+R9 Optional with Ambient Dim
 - 2700, 3000, 3500, 4000K, Ambient Dim standard. Tunable White and RGBW upon request
 - Lifetime: L87B3>55,000 hours at 40°C Ambient

- Housing
- 3 types of flangeless mounting options
 - Heavy gauge aluminum for new construction or remodel
 - IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
 - Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring
 - UL Listed – Damp or wet with shower trim
 - Compliant to with Airtight/IC Housing

- Driver
- Universal 120-277v
 - Dimming to 0.1% available
 - Prewired and integral to housing
 - Flicker free to IEEE 1789-2015
 - Phase, 0-10, DALI, Ecosystem or Wireless Control

Ordering Codes

PROJECT:







SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: CR4MWW-RMDL-Z-AU-C20-35-C1-2C-P14-LR

FIXTURE	TRIM	MOUNTING	SOURCE / WATTS	CCT	DRIVER / CONTROL	CIRCUITS	TRIM FINISH	ACCESSORIES
CR4MWW-RMDL								
Core 4" Round Double Wall Wash	F Flanged Trim Z Flangeless Trim FS Flanged Shower Trim* ZS Flangeless Shower Trim*	Flanged Housings U Universal - Non IC AU Universal IC/Airtight* Flangeless Housings P Plaster - Non IC AP Plaster IC/Airtight* PM Panel Mount - Non IC APM Panel Mount Airtight/IC* <div><div></div><div></div></div> California Title 24 Compliant *Not compatible with C28 source	Citizen C14 15W 679Lm** 90+CRI, 60+R9 C20 21W 832Lm** 90+CRI, 60+R9 C28 30W* 1069Lm** 90+CRI, 60+R9 Ambient Dim A14 15W 461Lm** 95+CRI, 90+R9 3000 to 1900K  Tunable White 90+CRI, 70+R9 1800-4000K or 2700-6500K^ RGBW 90+CRI, 60+R9 ^ <div><div></div><div></div></div> California Title 24 Compliant to JA8. * Requires Active Cooling and not compatible with IC/Airtight housing. Not compatible with L2 and LP drivers. ** Based on single aperture. ^ Available upon request. Contact your regional sales manager.	27 2700k 30 3000k 35 3500K 40 4000k AD 1900-3000k	C1 0-10 1.0%, UNV (120-277V) linear C2 ELV/Triac 1.0%, (120V) linear EldoLED E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear Lutron LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1 LP Digital Ecosystem* 0.1%, UNV (120-277V) ECO Premier Hi-Lume SoftOn/Fade-to-Black, PEQ0, 20W max * Not compatible with C28	1C 1 Circuit 2C 2 Circuit	W White Paint  B Black Paint  D Wood*  PXX Specialty Paint Color*  C Custom/RAL Color**  * Wood "D" selection to be used with Z trim and PM mounting - Refer to Wood Trim Guide ** Refer to Finish Guide	CP Chicago Plenum EM Emergency Pack Controls LR Lutron Wireless RF PowPak ATH Lutron Athena Wireless Node Must be used with E2 driver CA Casambi Wireless BLE to be paired with driver

Core 4" Round Double Wall Wash - (102mm - 8" on center)

Formerly known as 1250WW-2MDL
Recessed Fixed Multiple Aperture


Ceiling Cutouts and Dimensions

Wall Wash trim and light engine can be field adjusted 358° to wash adjacent or opposite walls or objects.


4" Round Flangeless Housing

Plaster Mount (P/AP)

(CR4MWW-RMDL-Z-P/AP)

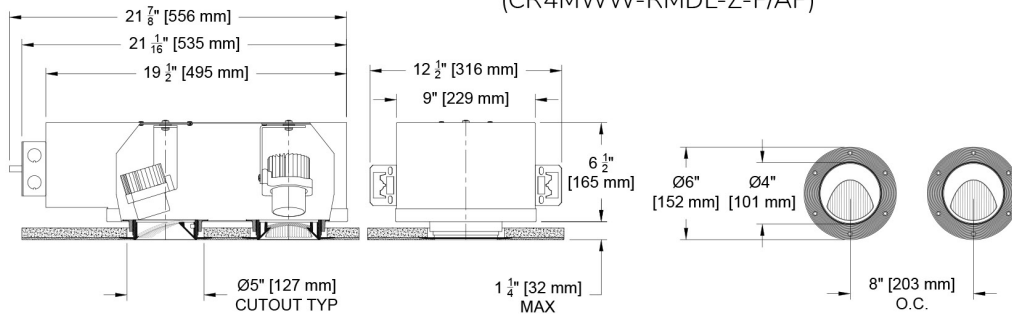


Hanger Bar Detail

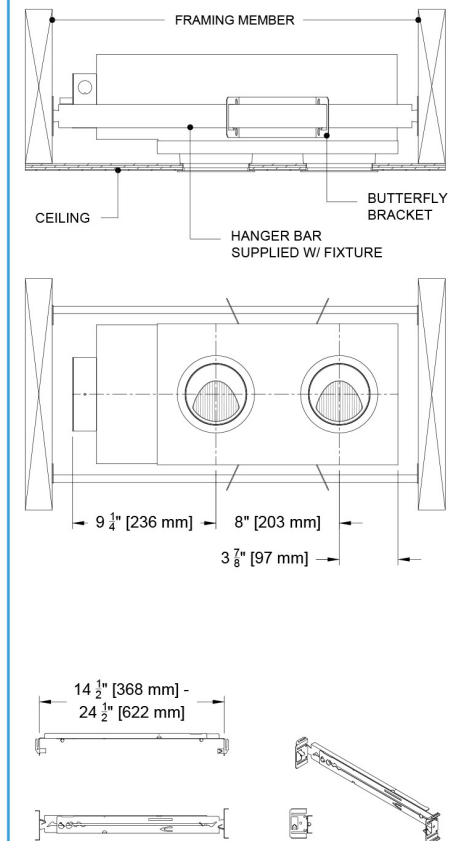

4" Round Flangeless Housing

Flanged Mount (U/AU)


(CR4MWW-RMDL-F-U/AU)

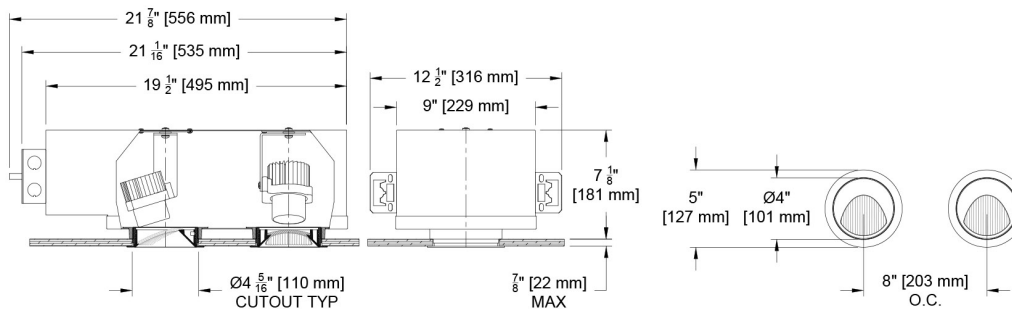


4" Round Flangeless Housing

Panel Mount (PM)

(CR4MWW-RMDL-Z-PM)

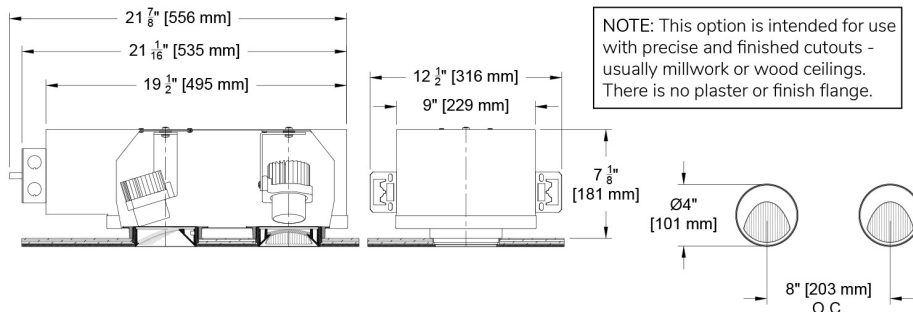

Panel Mount Detail

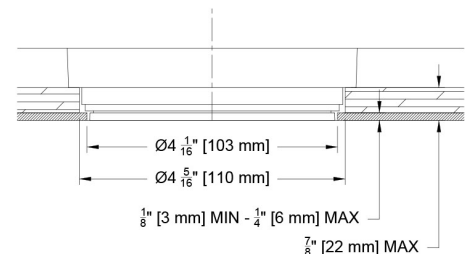

Core 4" Round Double Wall Wash - (102mm - 8" on center)

Formerly known as 1250WW-2MDL
Recessed Fixed Multiple Aperture




Photometric Table

Values are based on a single aperture CR4WW-RF. Calculations will require placing the second head (IES file) 8" on center from the first placed IES file in the desired orientation. All Measurements are delivered or derived delivered lumens at 3000k. Ambient dim at full output. *C28 source requires active cooling and must be used with NIC housing for required airflow. All values can vary +/-10% from source manufacturer rated flux range.

Round Wall Wash (CR4WW-RF)			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt
Citizen C14	14	833	60
Citizen C20	20	1056	53
Citizen C28*	31	1616	53
Ambient Dim A14	14	578	40
CCT Multiplier			
CCT	Citizen		
2700	0.95		
3000	1.00		
3500	1.02		
4000	1.03		

All values are delivered from a single aperture fixture

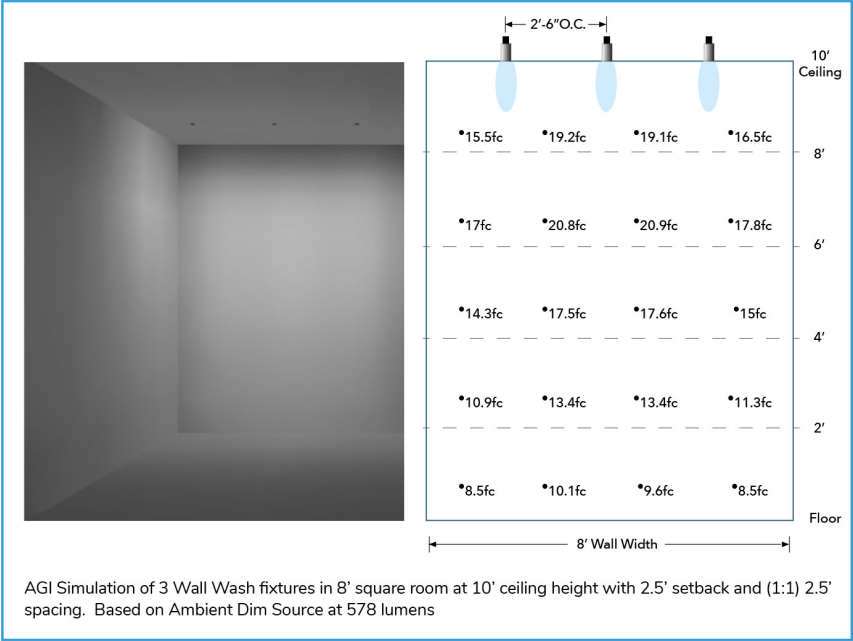


AGI Simulation of 3 Wall Wash fixtures in 8' square room at 10' ceiling height with 2.5' setback and (1:1) 2.5' spacing. Based on Ambient Dim Source at 578 lumens

Color Data

All data is based from goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT.


Citizen Sources for C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

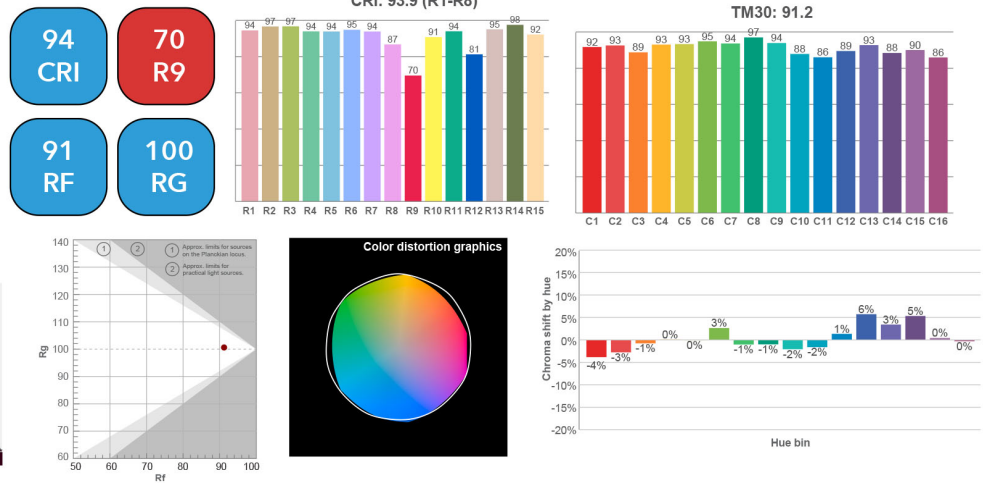


Ambient Dim 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

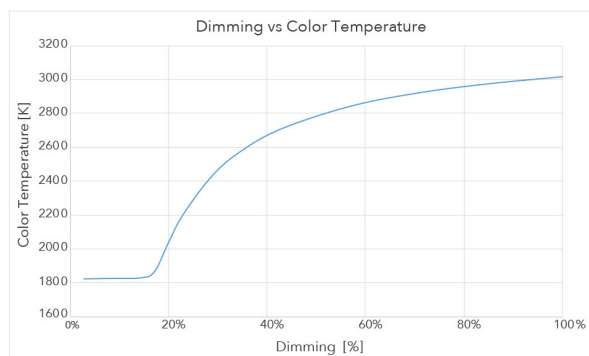

3000 CCT Full Output

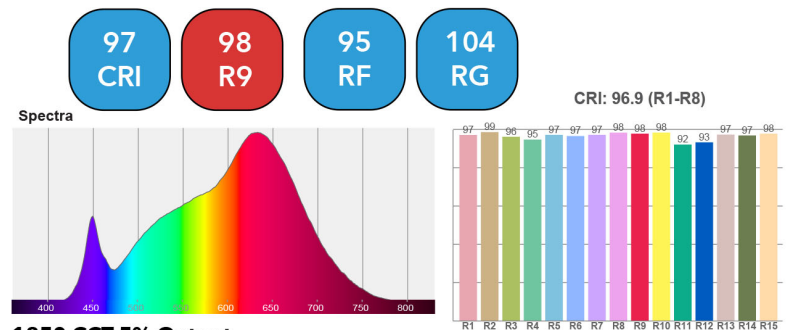

1850 CCT 5% Output

