

The Core Family

When one wall wash is not enough, you can make it a double. Need more light, or savings on installation costs, this 8" on center dual aperture fixture delivers a rich diversity of technical and aesthetic options including field configurable wall wash orientations for adjacent or opposite walls, over 14 finishes including custom wood trims, flux and source selections featuring 90+ CRI fixed white and our world class Ambient Dim (Warm Dim), a 3.7:1 uniformity ratio from top to bottom of wall and a plethora of driver and control choices. The Core Wall Wash is created on a platform allowing a high degree of modification, so if you don't see what you are looking for, just ask for it.

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CR4MWW-RMDL)

Trim

- Flanged or Flangeless
- Trim and light engine can be field adjusted 358° to wash adjacent or opposite walls or objects
- 14 color options + custom RAL or wood available
- One-piece die cast aluminum or machined wood trim
- Plaster Mount has plaster flange and lip

Source / Optics

- Wall wash achieves a uniform 3.7:1 ratio from top to bottom of 10' wall
- Over 3200 lumens delivered with both apertures and C28 source selection
- <2 MacAdam Steps (<2SDCM) for fixed white
- 90 CRI, 60+ R9 Standard- 95 CRI 90+R9 Optional with Ambient Dim
- 2400K, 2700K, 3000K, 3500K, 4000K Ambient Dim, RGBW & Tunable White options

Housing

- 3 types of flangeless mounting options
- Heavy gauge aluminum for new construction or remodel
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring


-  Listed – Damp or wet with shower trim

-  Compliant to  with Airtight/IC Housing

Driver

- Universal 120-277V
- Dimming to 0.1% available
- Pre wired and integral to housing
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control

4" Round Z (Flangeless)


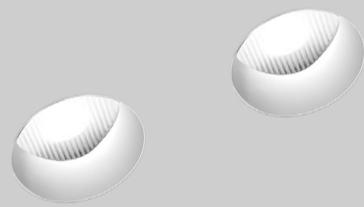


Double Aperture

4" Round F (Flanged)



Double Aperture

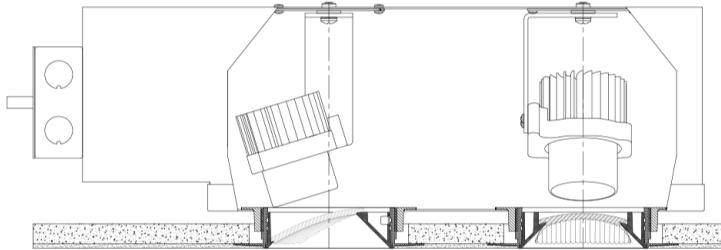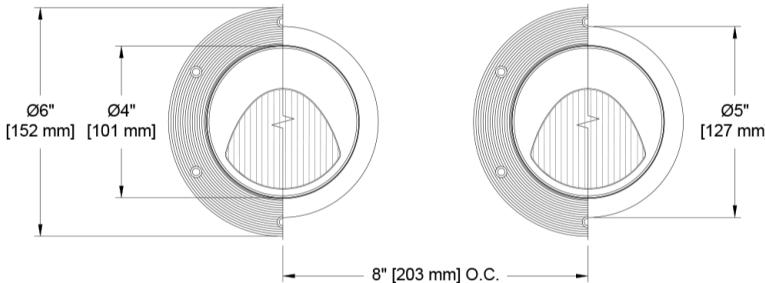

Wood Trims Available



Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: CR4MWW-RMDL-Z-AU-C20-35-C1-2C-P14-LR


Ceiling Cutouts and Dimensions

Wall Wash trim and light engine can be field adjusted 358° to wash adjacent or opposite walls or objects.

4" Round Flangeless Housing

Plaster Mount (P/AP)



(CR4MWW-RMDL-Z-P/AP)

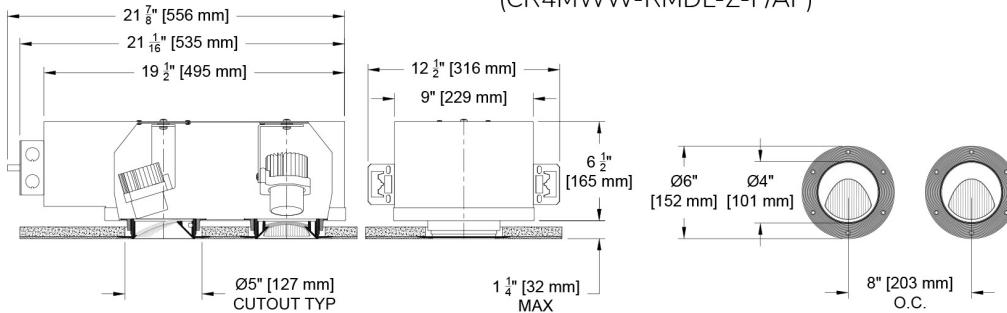

4" Round Flangeless Housing

Flanged Mount (U/AU)


(CR4MWW-RMDL-F-U/AU)

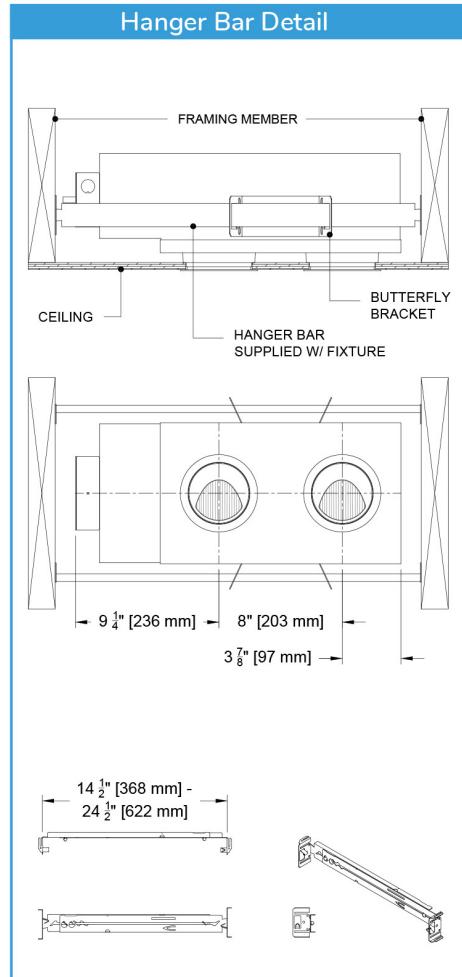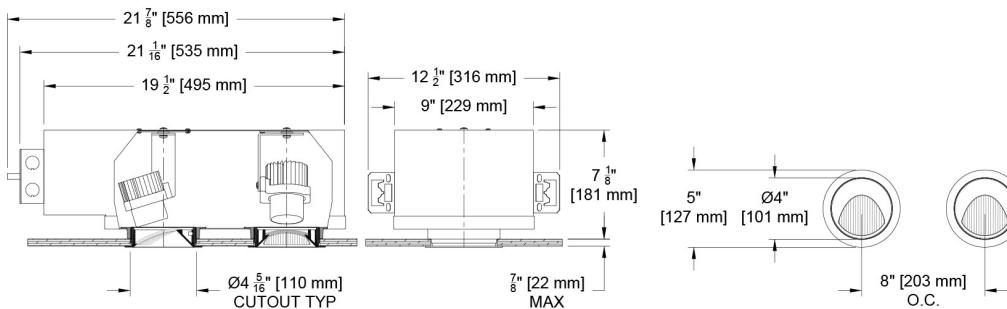

4" Round Flangeless Housing

Panel Mount (PM)

(CR4MWW-RMDL-Z-PM)

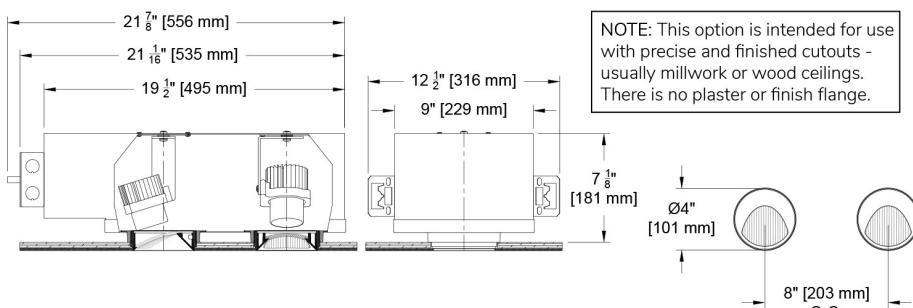

Panel Mount Detail

Ø4 1/16" [103 mm]
Ø4 5/16" [110 mm]

1/8" [3 mm] MIN - 1/4" [6 mm] MAX



7/8" [22 mm] MAX

Photometric Table

Values are based on a single aperture CR4WW-RF. Calculations will require placing the second head (IES file) 8" on center from the first placed IES file in the desired orientation. All Measurements are delivered or derived delivered lumens at 3000k. Ambient dim at full output. *C28 source requires active cooling and must be used with NIC housing for required airflow. All values can vary +/-10% from source manufacturer rated flux range.

Round Wall Wash (CR4WW-RF)			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt
Citizen C14	14	833	60
Citizen C20	20	1056	53
Citizen C28*	31	1616	53
Ambient Dim A14	14	578	40
CCT Multiplier			
CCT	Citizen		
2700	0.95		
3000	1.00		
3500	1.02		
4000	1.03		


All values are delivered from a single aperture fixture

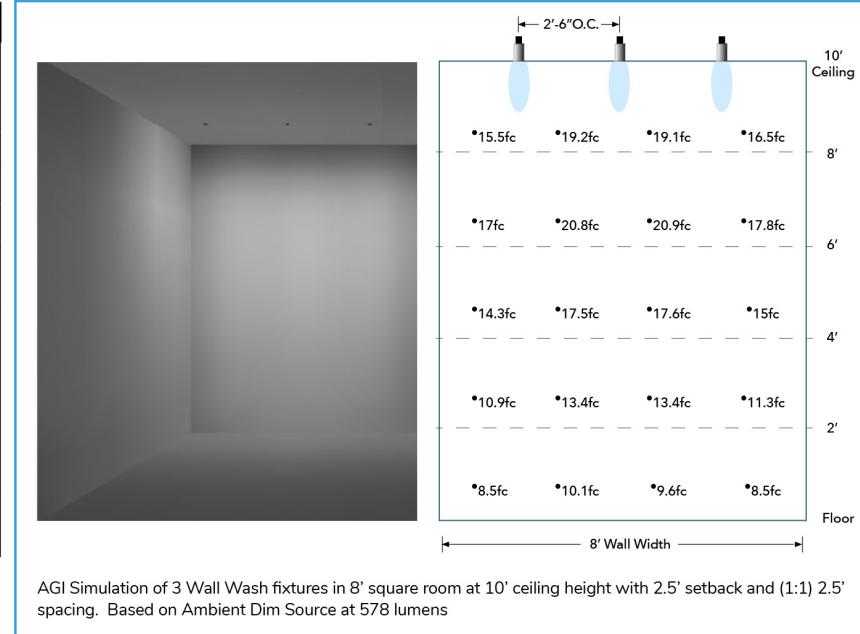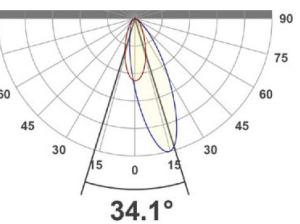

Color Data

Citizen Sources for C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

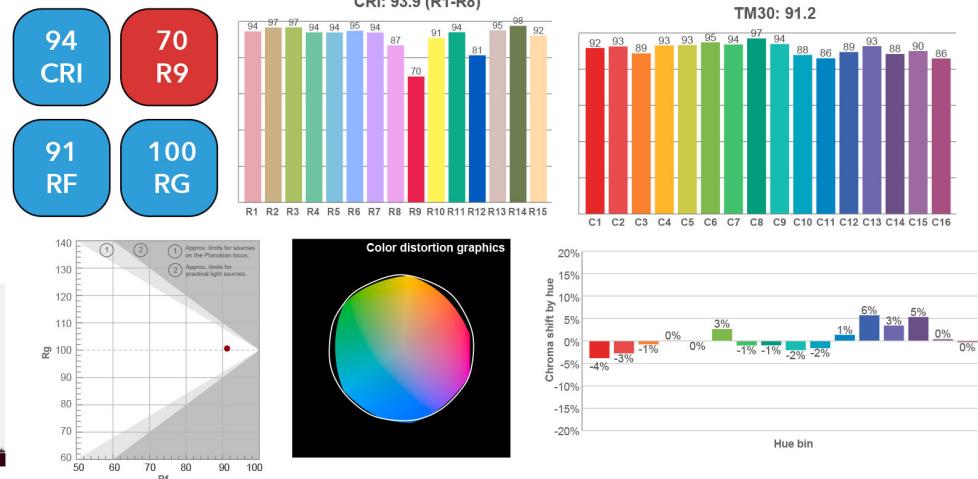

Ambient Dim 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

