

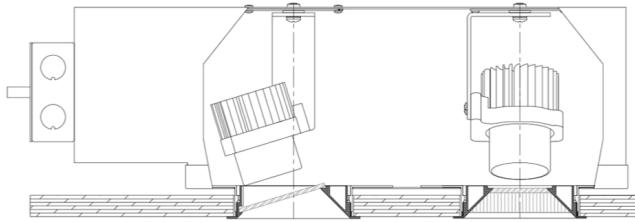




## The Core Family

When one wall wash is not enough, you can make it a double. Need more light, or savings on installation costs, this 8" on center dual aperture fixture delivers a rich diversity of technical and aesthetic options including field configurable wall wash orientations for adjacent or opposite walls, over 14 finishes including custom wood trims, flux and source selections featuring 90+ CRI fixed white and our world class Ambient Dim (Warm Dim), a 3.7:1 uniformity ratio from top to bottom of wall and a plethora of driver and control choices. The Core Wall Wash is created on a platform allowing a high degree of modification, so if you don't see what you are looking for, just ask for it.



### Aperture Options



PROJECT:

TYPE:

SPECIFIER:

DATE:

### Key Points (CR4MWW-SMDL)

#### Trim

- Trim and light engine can be field oriented at 90° increments to wash adjacent or opposite walls
- Flanged or Flangeless
- 14 color options + custom RAL or wood available
- One-piece die cast aluminum or machined wood trim
- Plaster Mount allows installation from below with large plaster flange and lip

#### Source / Optics

- Wall wash achieves a uniform 3.7:1 ratio from top to bottom of 10' wall
- Over 2000 lumens delivered with both apertures and C28 source selection
- <2 MacAdam Steps (<2SDCM) for fixed white
- 90 CRI, 60+ R9 Standard- 95 CRI 90+R9 Optional with Ambient Dim
- 2700K, 3000K, 3500K, 4000K Ambient Dim, RGBW & Tunable White options
- Lifetime: L87B3>55,000 hours at 40°C Ambient

#### Housing

- 3 types of flangeless mounting options
- Heavy gauge aluminum for new construction or remodel
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring

-  Listed – Damp or wet with shower trim

-  Compliant to  with Airtight/IC Housing

#### Driver

- Universal 120-277v
- TruPhase™ Dimming to 0.1% available
- Prewired and integral to housing
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control

# Ordering Codes

## PROJECT:

### SPECIFIER:

DATE:

TYPE:

**QUANTITY:**

*Ordering Code Example: CR4MWW-SMDL-Z-AU-C20-35-C1-2C-P14-LR*

Fixture	Trim	Mounting	Source / Watts	CCT	Driver / Control	Circuits	Trim Finish	Accessories
CR4MWW-SMDL								
Core 4" Square Double Wall Wash	<p><b>Flanged Trims</b></p> <p>F Flanged Trim</p> <p>FS Flanged Shower Trim*</p> <p>(for mounting choose from Flanged Housings)</p> <p>Flangeless Trims</p> <p>Z Flangeless Trim</p> <p>ZS Flangeless Shower Trim*</p> <p>(for mounting choose from Flangeless Housings)</p> <p>California Title 24 Compliant</p> <p>*Not compatible with C28 source</p>	<p><b>Flanged Housings</b></p> <p>U Universal - Non IC</p> <p>AU Universal IC/Airtight*</p> <p><b>Flangeless Housings</b></p> <p>P Plaster - Non IC</p> <p>AP Plaster IC/Airtight*</p> <p>PM Panel Mount - Non IC</p> <p>APM Panel Mount Airtight/IC*</p> <p>California Title 24 Compliant</p> <p>*Not compatible with C28 source</p>	<p><b>Citizen</b></p> <p>C14 15W 679Lm** 90+CRI, 60+R9</p> <p>C20 21W 832Lm** 90+CRI, 60+R9</p> <p>C28 30W* 1069Lm** 90+CRI, 60+R9</p> <p><b>Tunable</b></p> <p>T9 90+CRI, 60+R9 Tunable White</p> <p>T20 21W 1490Lm^ 90+CRI, 60+R9 Tunable White</p> <p>RGBW 90+CRI, 60+R9</p> <p><b>Ambient Dim™</b></p> <p>A14 15W 95+CRI, 90+R9</p> <p>A20 21W 95+CRI, 90+R9</p> <p>California Title 24 Compliant to JA8.</p> <p>* Requires Active Cooling and not compatible with IC/Airtight housing. Not compatible with L2 and LP drivers.</p> <p>** Based on single aperture.</p> <p>^ Available upon request. Contact your regional sales manager.</p>	<p>24 2400K</p> <p>30 3000K</p> <p>35 3500K</p> <p>40 4000K</p> <p>27 2700K</p> <p><b>Tunable</b></p> <p>TW1840 1800-4000K Tunable White w/ E1, E2, E3, E4</p> <p>TW2765 2700-6500K Tunable White w/ E1, E2, E3, E4</p> <p>RGBW 1200-8000K Dynamic Color Changing</p> <p><b>Ambient Dim™</b></p> <p>2722* 2700-2200K *A14 Only</p> <p>3019 3000-1900K</p> <p>3022 * 3000-2200K *A14 Only</p>	<p>C1 0-10 1.0%, UNV (120-277V) linear</p> <p>C2 ELV/Triac 1.0%, (120V) linear</p> <p>E1 0-10 0.1%, UNV (120-277V) log</p> <p>E2 DALI-2 0.1%, UNV (120-277V) log</p> <p>E3 0-10 0.1%, UNV (120-277V) linear</p> <p>E4^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX</p> <p>^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS</p> <p>LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1</p> <p>TR2 TruPhase™ 0.1%, (120-120V) log Up to 20W</p> <p>Forward and Reverse compatible Phase Dimming Static White &amp; Ambient Dim only</p> <p>* Not compatible with C28</p>	<p>1C 1 Circuit</p> <p>2C 2 Circuit</p>	<p>W White Paint</p> <p>B Black Paint</p> <p>D Wood*</p> <p>PXX Specialty Paint Color*</p> <p>P01-P15</p> <p>C Custom/RAL Color**</p>	<p>EM Emergency Pack</p> <p>CP Chicago Plenum Controls</p> <p>LR Lutron Wireless RF PowPak</p> <p>ATH Lutron Athena Wireless Node Must be used with E2 driver</p> <p>CA Casambi Wireless BLE to be paired with driver</p> <p>* Wood "D" selection to be used with Z trim and PM mounting - Refer to Wood Trim Guide</p> <p>** Refer to Finish Guide</p> <p><b>FINISH GUIDE LINK</b></p> <p><b>WOOD TRIM GUIDE</b></p>




# Ceiling Cutouts and Dimensions

Trim and light engine can be configured, in the field, at 90° increments to wash adjacent or opposite walls.

## 4" Square Flangeless Housing

## Plaster Mount (P/AP)



(CR4MWW-SMDL-Z-P/AP)

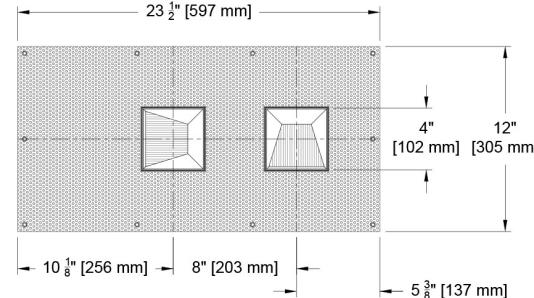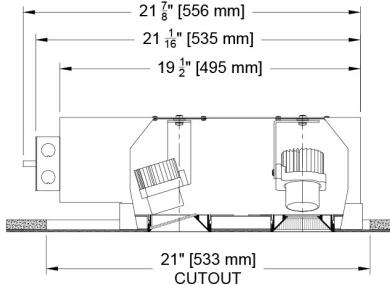

## 4" Square Flanged Housing

## Flanged Mount (U/AU)



(CR4MWW-SMDL-F-U/AU)

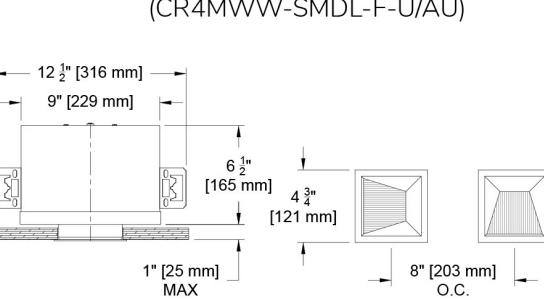

## 4" Square Flangeless Housing

## Flangeless Mount (U/AU)

(CR4MWW-SMDL-Z-U/AU)

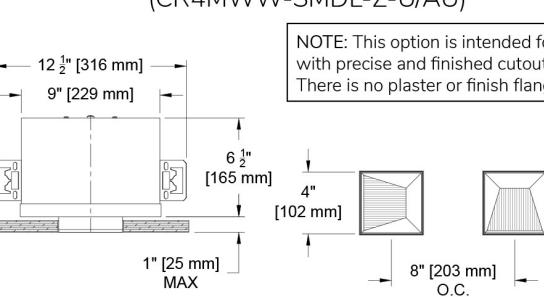
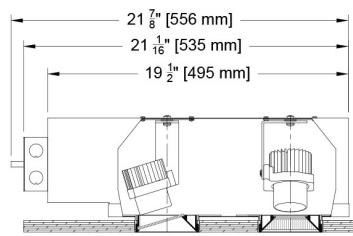


NOTE: This option is intended for use with precise and finished cutouts. There is no plaster or finish flange.


## 4" Square Flangeless Housing

## Panel Mount (PM/APM)

(CR4MWW-SMDL-Z-PM/APM)

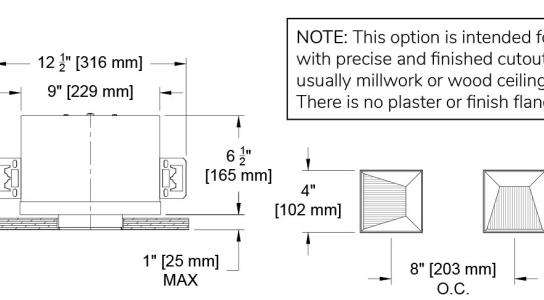

NOTE: This option is intended for use with precise and finished cutouts - usually millwork or wood ceilings. There is no plaster or finish flange.


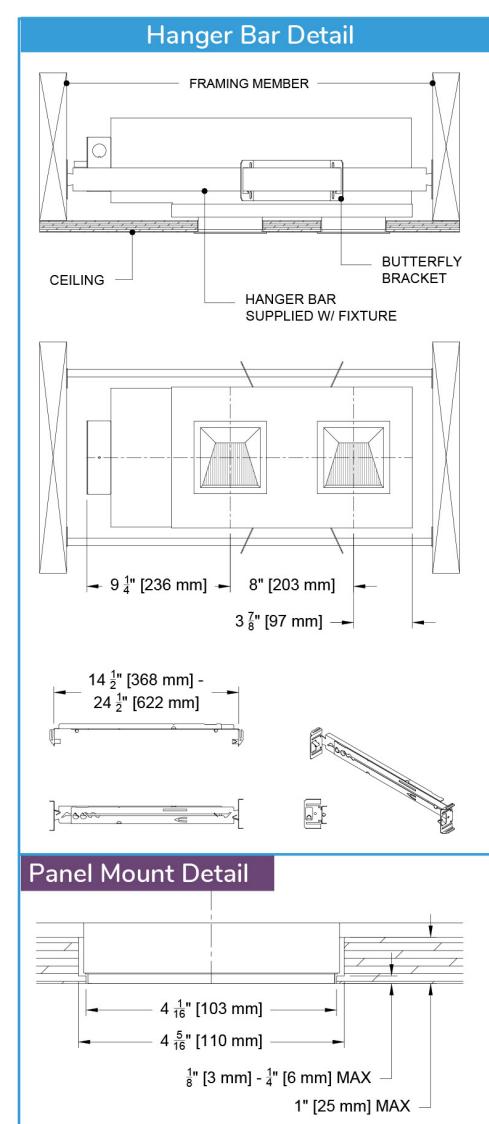


## Photometric Table

Values are based on a single aperture CR4WW-SF. Calculations will require placing the second head (IES file) 8" on center from the first placed IES file in the desired orientation. All Measurements are delivered or derived delivered lumens at 3000k. Ambient dim at full output. \*C28 source requires active cooling and must be used with NIC housing for required airflow. All values can vary +/-10% from source manufacturer rated flux range.

SQUARE Wall Wash (CR4WW-TMCF)			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt
Citizen C14	14	679	49
Citizen C20	21	832	40
Citizen C28*	30	1069	35
Ambient Dim A14	15	461	31
CCT Multiplier			
CCT	Citizen		
2700	0.95		
3000	1.00		
3500	1.02		
4000	1.03		


All values are delivered from a single aperture fixture

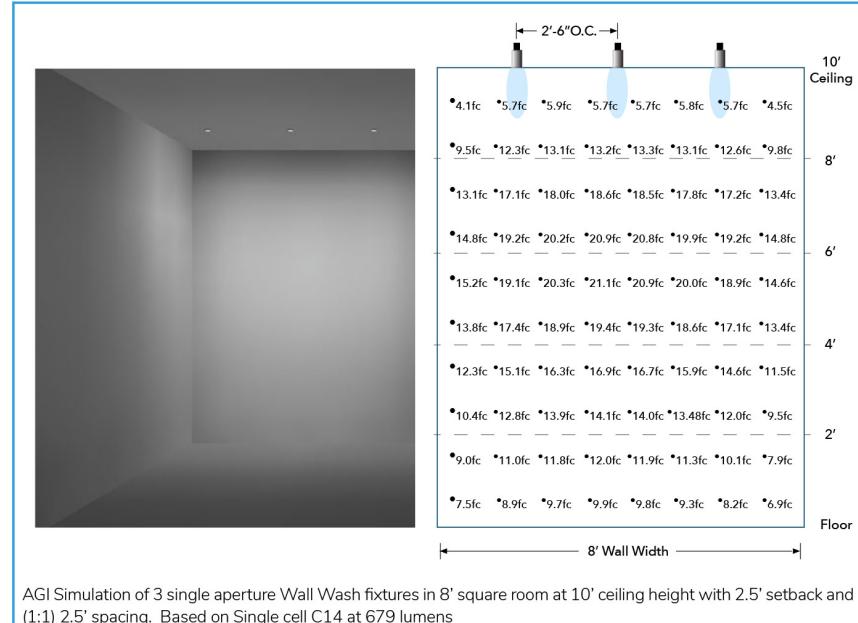

## Color Data

### Citizen Sources for C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

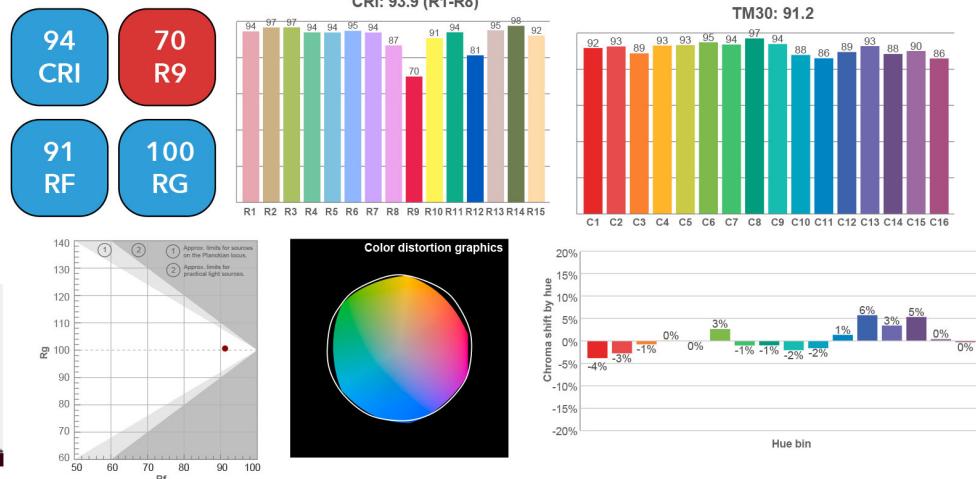

### Ambient Dim 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

