


The Core Family

When one wall wash is not enough, you can make it a double. Need more light, or savings on installation costs, this 8" on center dual aperture fixture delivers a rich diversity of technical and aesthetic options including field configurable wall wash orientations for adjacent or opposite walls, over 14 finishes including custom wood trims, flux and source selections featuring 90+ CRI fixed white and our world class Ambient Dim (Warm Dim), a 3.7:1 uniformity ratio from top to bottom of wall and a plethora of driver and control choices. The Core Wall Wash is created on a platform allowing a high degree of modification, so if you don't see what you are looking for, just ask for it.

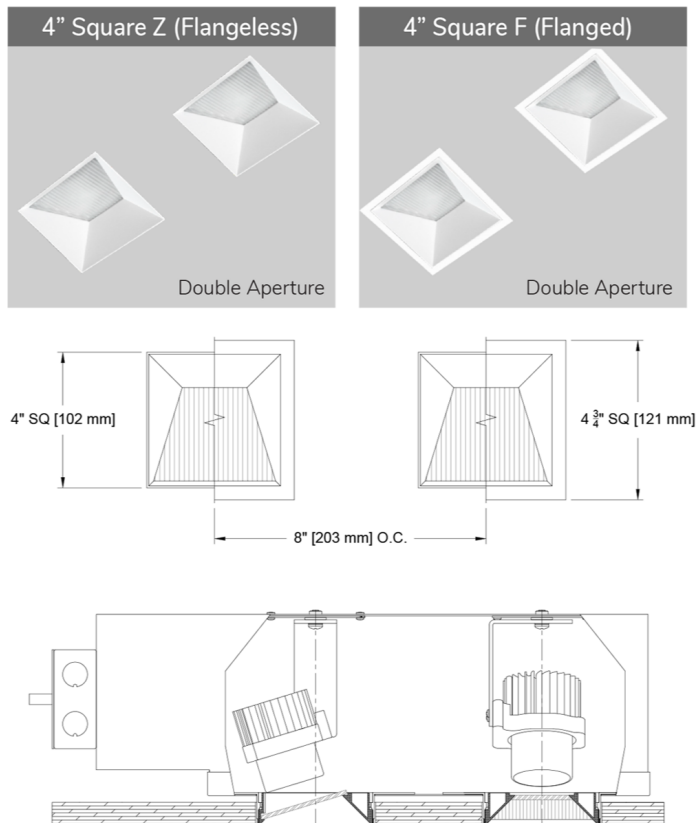

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CR4MWW-SMDL)

Trim

- Trim and light engine can be field oriented at 90° increments to wash adjacent or opposite walls
- Flanged or Flangeless
- 14 color options + custom RAL or wood available
- One-piece die cast aluminum or machined wood trim
- Plaster Mount allows installation from below with large plaster flange and lip

Source / Optics

- Wall wash achieves a uniform 3.7:1 ratio from top to bottom of 10' wall
- Over 2000 lumens delivered with both apertures and C28 source selection
- <2 MacAdam Steps (<2SDCM) for fixed white
- 90 CRI , 60+ R9 Standard- 95 CRI 90+R9 Optional with Ambient Dim
- 2700K, 3000K, 3500K, 4000K Ambient Dim, RGBW & Tunable White options
- Lifetime: L87B3>55,000 hours at 40°C Ambient

Housing

- 3 types of flangeless mounting options
- Heavy gauge aluminum for new construction or remodel
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring
-  Listed – Damp or wet with shower trim
-  Compliant to  with Airtight/IC Housing

Driver

- Universal 120-277v
- TruPhase™ Dimming to 0.1% available
- Prewired and integral to housing
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control

Recessed Fixed Multiple Aperture



PROJECT:

DATE:

TYPE:

QUANTITY:

FIXTURE	TRIM	MOUNTING	SOURCE / WATTS	CCT	DRIVER / CONTROL	CIRCUITS	TRIM FINISH	ACCESSORIES
---------	------	----------	----------------	-----	------------------	----------	-------------	-------------

[illegible]


Ceiling Cutouts and Dimensions

Trim and light engine can be configured, in the field, at 90° increments to wash adjacent or opposite walls.

4" Square Flangeless Housing

Plaster Mount (P/AP)


(CR4MWW-SMDL-Z-P/AP)

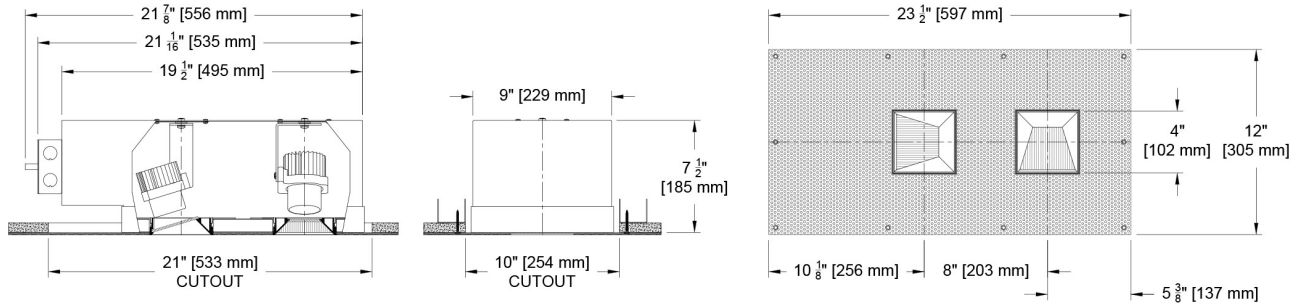

4" Square Flanged Housing

Flanged Mount (U/AU)


(CR4MWW-SMDL-F-U/AU)

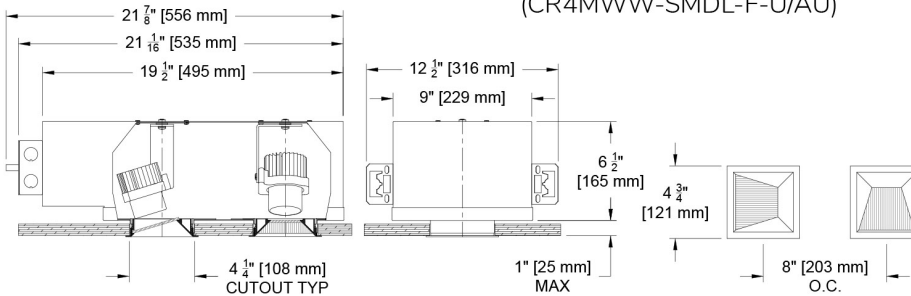

4" Square Flangeless Housing

Flangeless Mount (U/AU)


(CR4MWW-SMDL-Z-U/AU)

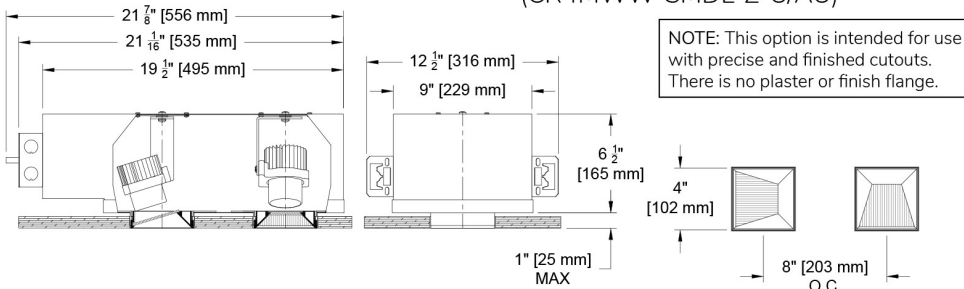




4" Square Flangeless Housing

Panel Mount (PM/APM)


(CR4MWW-SMDL-Z-PM/APM)

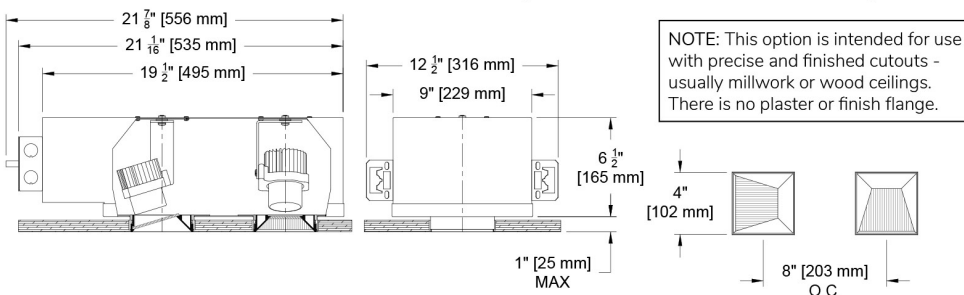


Hanger Bar Detail

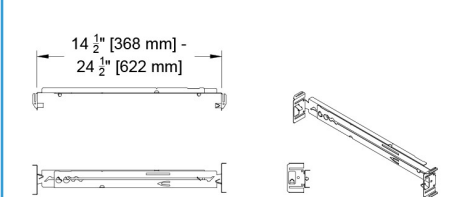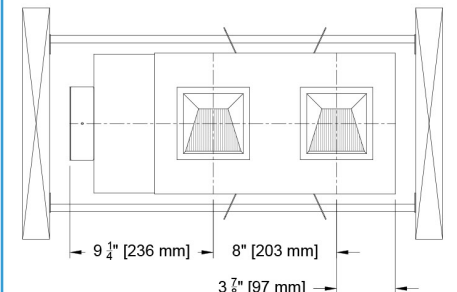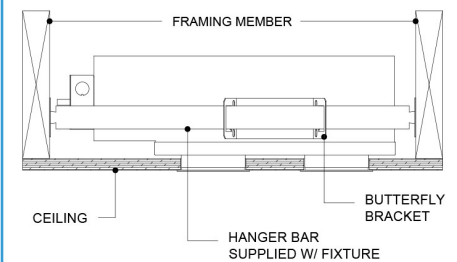


Panel Mount Detail

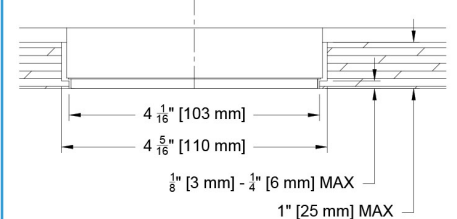

Photometric Table Values are based on a single aperture CR4WW-SF. Calculations will require placing the second head (IES file) 8" on center from the first placed IES file in the desired orientation. All Measurements are delivered or derived delivered lumens at 3000k. Ambient dim at full output. *C28 source requires active cooling and must be used with NIC housing for required airflow. All values can vary +/-10% from source manufacturer rated flux range.

SQUARE Wall Wash (CR4WW-TMCF)			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt
Citizen C14	14	679	49
Citizen C20	21	832	40
Citizen C28*	30	1069	35
Ambient Dim A14	15	461	31
CCT Multiplier			
CCT	Citizen		
2700	0.95		
3000	1.00		
3500	1.02		
4000	1.03		

All values are delivered from a single aperture fixture

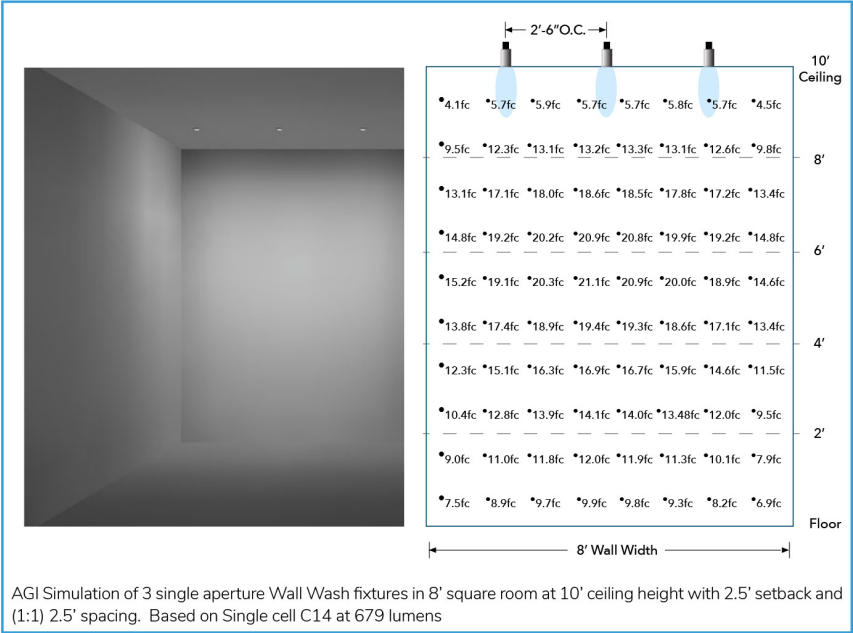


Color Data

All data is based from goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT.


Citizen Sources for C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

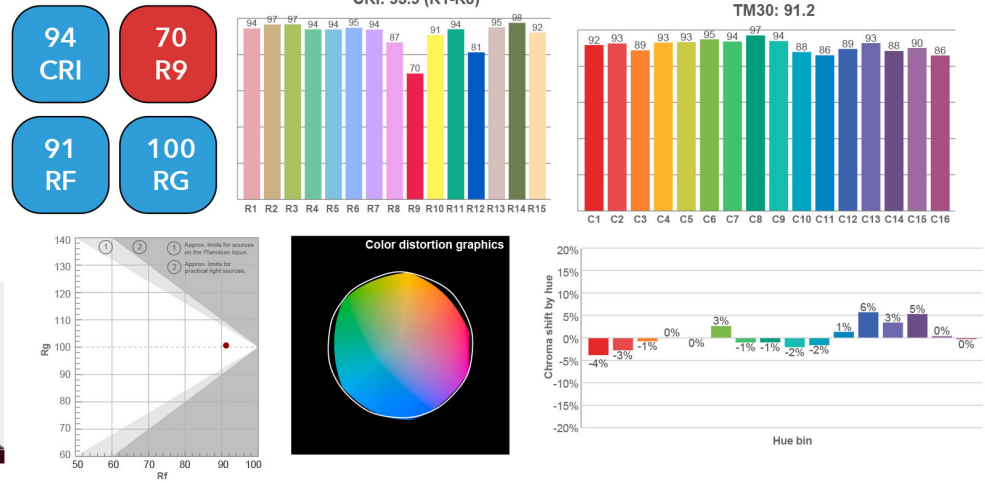


Ambient Dim 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

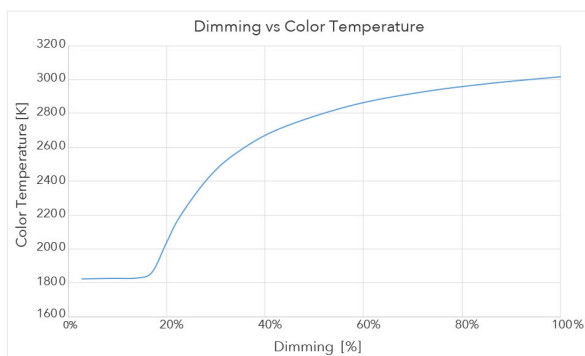

3000 CCT Full Output

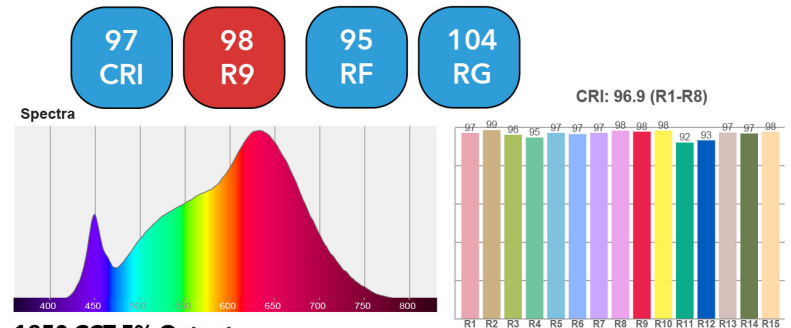

1850 CCT 5% Output

