






The Core Family

Welcome to the Core line of fixtures. You will find a rich diversity of technical and aesthetic options including 3 trim apertures, over 14 finishes including custom wood trims, flux and source selections featuring 90+ CRI fixed white and our world class Ambient Dim (Warm Dim), multiple beam spreads and plethora of driver and control choices. The Core adjustable wall wash is created on a platform allowing a high degree of modification, so if you don't see what you are looking for, just ask.

4" Round WW Z (Flangeless)

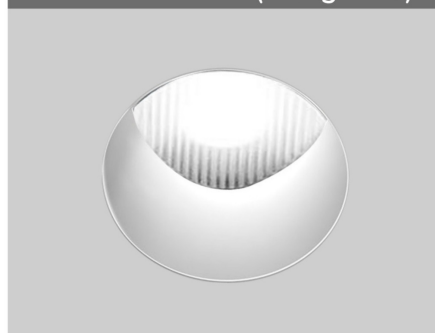

4" Round WW F (Flanged)

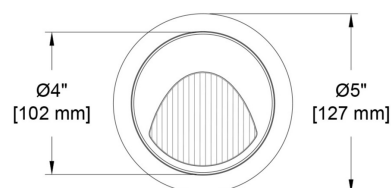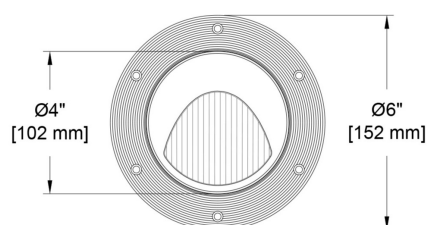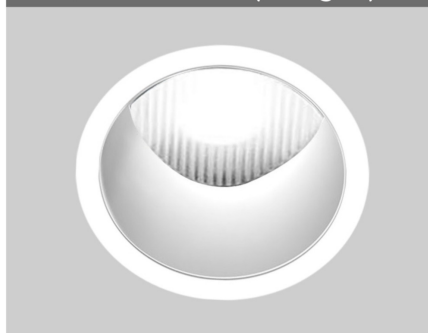

Wood Trim Available

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CR4WW-RA)

Trim

- Flanged or Flangeless
- Frosted Supertex borosilicate glass spread lens, hinged for source and driver service
- Flangeless includes plaster flange
- 14 color options + custom RAL or wood available
- One-piece die cast aluminum or machined wood trim

Source / Optics

- **AmbientDim™**, RGBW & Tunable White options
- 2400K, 2700K, 3000K, 3500K, 4000K
- 90 CRI, 60+ R9 Standard- 95 CRI 90+R9 Optional
- <2 MacAdam Steps (<2SDCM) for fixed white
- Up to 2751 delivered lumens.
- Adjustable to 45° with 360° of rotation.
- Uniform light from floor to ceiling. Achieves a 3.7:1 ratio on a 10' ceiling at 2.5' setback with a 1:1 on center spacing

Housing

- **TITLE 24** Compliant to **JA8** with Airtight Housing
- **UL** Listed – Damp or wet with shower trim
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Heavy gauge aluminum for new construction or remodel

Driver

- **TruPhase™**, 0-10, DALI-2, DMX, Ecosystem or Wireless Control
- Universal 120-277v
- Prewired and integral to housing
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections

Ordering Codes

PROJECT: SPECIFIER:
DATE: TYPE: QUANTITY:

Ordering Code Example: CR4WW-RA-F-AU-C20-35-24-E2-P14-CA

FIXTURE	TRIM	MOUNTING	SOURCE / WATTS	CCT	DRIVER / CONTROL	TRIM FINISH	ACCESSORIES
CR4WW-RA							
Core 4" Round Adjustable Wall Wash	Flanged Trims F Flanged Trim ~ FS Flanged Shower Trim* (for mounting choose from Flanged Housings) Flangeless Trims Z Flangeless Trim ZS Flangeless Shower Trim* (for mounting choose from Flangeless Housings) *Aperture Lens Required	Flanged Housings U Universal - Non-IC Housing AU Airtight Universal IC-Rated Flangeless Housings P Plaster - Non-IC Housing AP Airtight Plaster IC-Rated PM Panel Mount APM Airtight Panel Mount IC-Rated Supports CA Title24 compliance	Citizen C14 15W 833Lm 90+CRI, 60+R9 C20 20W 1056Lm 90+CRI, 60+R9 C28 30W* 1616Lm* 90+CRI, 60+R9 C32 35W 2751Lm* 90+CRI, 60+R9 Tunable T9 90+CRI, 60+R9 Tunable White T15 90+CRI, 60+R9 Tunable White T20 90+CRI, 60+R9 Tunable White RGBW 15W 90+CRI, 60+R9 Ambient Dim™ A14 15W 578Lm 95+CRI, 90+R9 A20 21W 1050Lm 90+CRI, 68+R9 Supports CA Title 24 Compliance to JA8 except in flat aperture ~See Photometrics chart for latest performance data	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K Tunable TW1840 1800-4000K Tunable White w/ E1, E2, E3, E4 TW2765 2700-6500K Tunable White w/ E1, E2, E3, E4 RG1280 1200-8000K RGBW Dynamic Color Changing *Requires E2 or E4 Ambient Dim™ 2722 2700-2200K *A14 Only 3019 3000-1900K 3022 3000-2200K *A14 Only	C1 0-10 1.0%, UNV (120-277V) linear C2 ELV/Triac 1.0%, (120V) linear E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear E4^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX ^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1 TR2 Phase 0.1%, (120-120V) log TruPhase™ Up to 20W Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only	W White Paint B Black Paint D Wood* PXX Specialty Paint Color* P01-P15 C Custom/RAL Color** * Wood "D" selection to be used with Z trim and PM mounting - Refer to Wood Trim Guide ** Refer to Finish Guide FINISH GUIDE LINK WOOD TRIM GUIDE	EM Emergency Pack CP Chicago Plenum Controls LR Lutron Wireless RF PowPak ATH Lutron Athena Wireless Node Must be used with E2 driver CA Casambi Wireless BLE to be paired with driver


Ceiling Cutouts and Dimensions

Deep Regress Shown - others similar



Round Flangeless Housing

Plaster Mount (P/AP)

(CR4WW-RA-Z-P/AP)

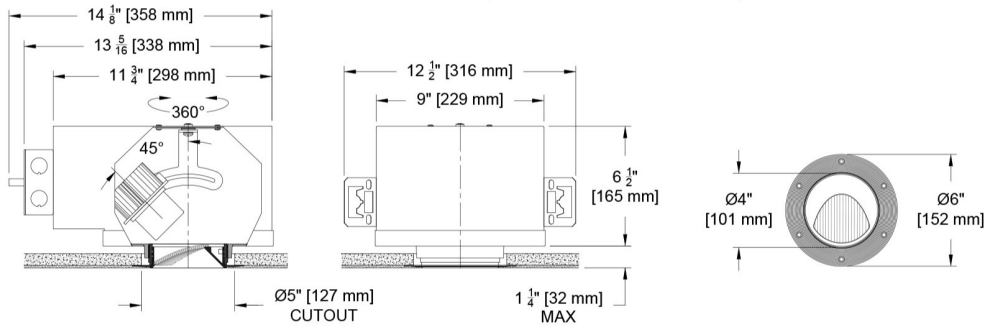


Hanger Bar Detail

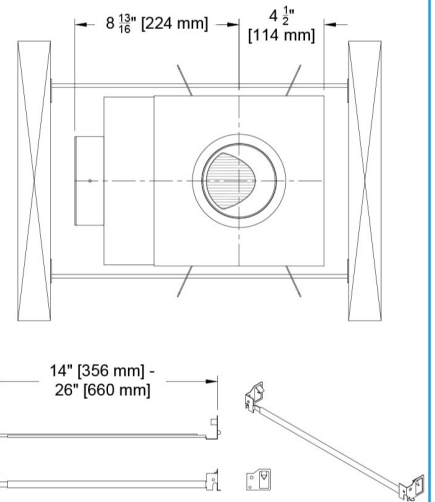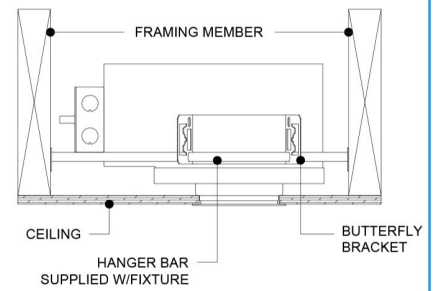

Round Flanged Housing

Flanged Mount (U/AUA)


(CR4WW-RA-F-U/AU)

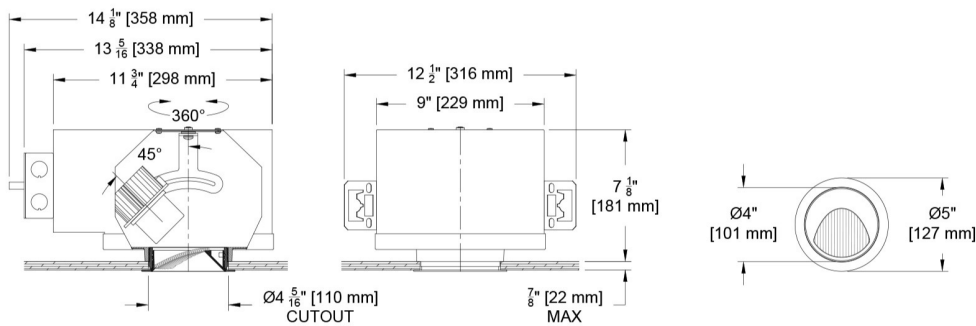


Round Flangeless Housing

Panel Mount (PM)


(CR4WW-RA-Z-PM)

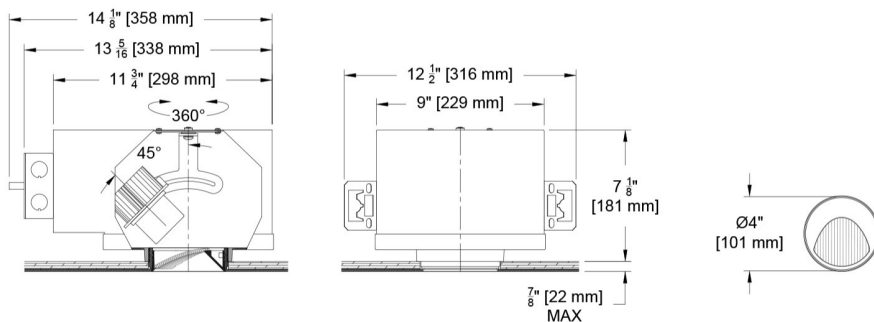


Panel Mount Detail

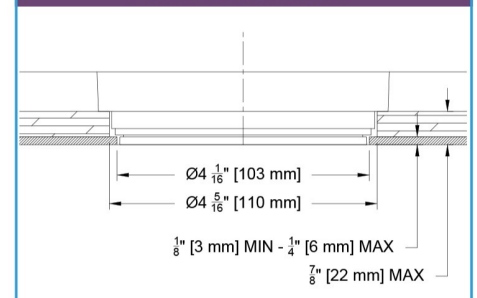

Photometric Table All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT

ROUND WW (CR4WW-RA) Beamspreads		35.6°		ISO CD Plot		
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt		CCT Multiplier	
Citizen C14	14	833	60		2700	.95
Citizen C20	20	1056	53		3000	1.00
Citizen C28*	31	1616	53		3500	1.02
Ambient Dim A14	14	578	40		4000	1.03

All data based on 3000k. See Multipliers for other CCT. Ambient Dim based on 3000k at full output. *C28 requires active cooling and cannot be used with IC housing or Chicago Plenum

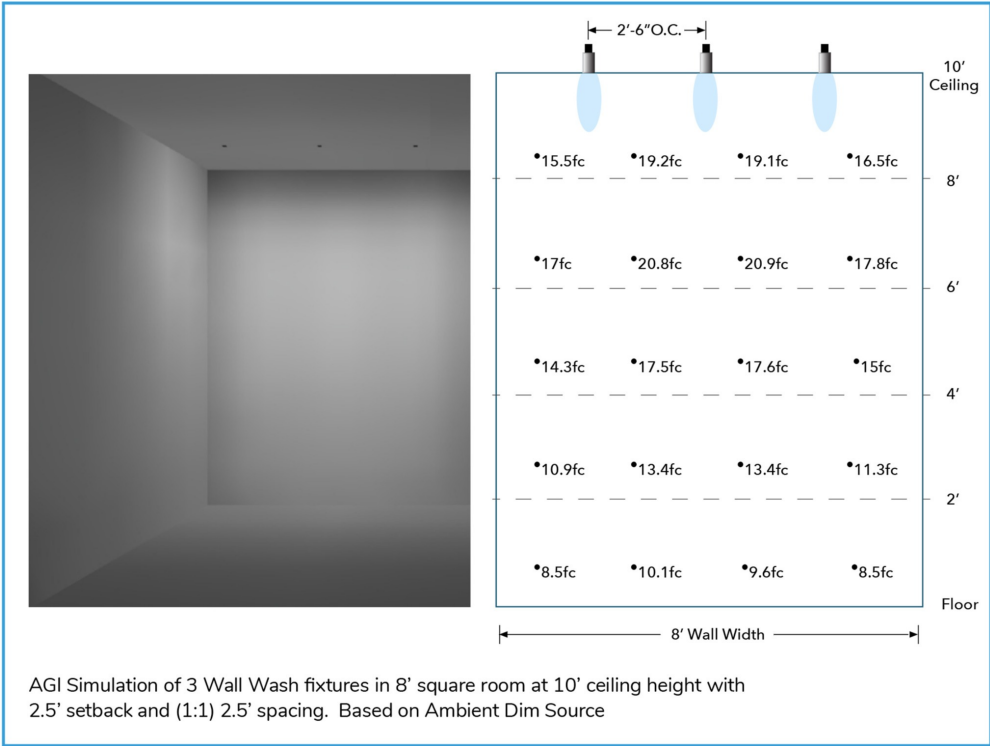


Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT

Citizen Sources - C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

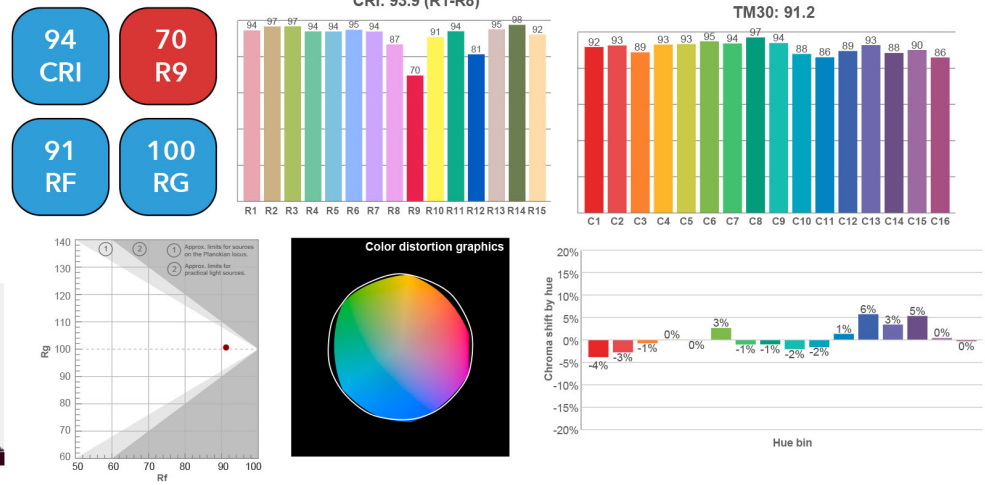

Ambient Dim - 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range



3000 CCT Full Output



1850 CCT 5% Output

