


The Core Family

Welcome to the Core line of fixtures. You will find a rich diversity of technical and aesthetic options with over 14 finishes including custom wood trims, flux and source selections featuring 90+ CRI fixed white and our world class Ambient Dim (Warm Dim), a 3.7:1 uniformity ratio from top to bottom of the wall and plethora of driver and control choices. The Core wall wash is created on a platform allowing a high degree of modification, so if you don't see what you are looking for, just ask.


4" Square Z (Flangeless)

4" Square F (Flanged)

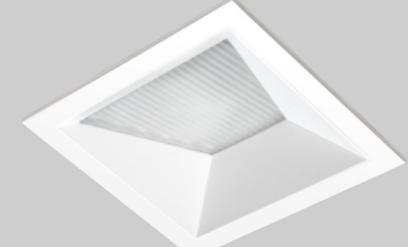

A diagram of a trapezoidal frame. The left side shows a vertical dimension line with arrows at the top and bottom, labeled $4 \frac{3}{4}$ " [120 mm]. The right side shows a trapezoid with a vertical band of hatching in the center, representing a cutout or opening.

Wood Trims Available

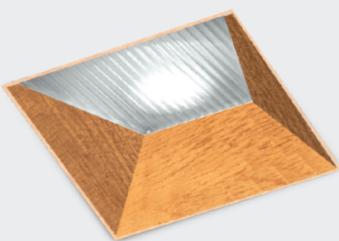

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CR4WW-SA)

Trim

- Flange of Flangeless
- Frosted Supertex borosilicate glass spread lens, hinged for source and driver service
- Flangeless includes plaster flange with plaster lip
- 14 color options + custom, RAL or wood available
- One-piece die cast aluminum or machined wood trim

Source / Optics

- 2400K, 2700K, 3000K, 3500K, 4000K
Ambient Dim, RGBW & Tunable White options
- Lifetime: L87B3>55,000 hours at 40°C ambient
- 90 CRI , 60+ R9 Standard- 95 CRI 90+R9 Optional
- <2 MacAdam Steps (<2SDCM) for fixed white
- Up to 1069 delivered lumens
- Adjustable to 45° with 360° of rotation
- Uniform light from floor to ceiling. Achieves a 3.7:1 ratio on a 10' ceiling at 2.5' setback with a 1:1 on center spacing

Housing

- TITLE 24 Compliant to JA8 with Airtight Housing (C14 only)
-  c_{CSA}us Listed – Damp or wet with shower trim
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90^o through wiring
- IC Rated / Airtight Housing approved for use in direct contact insulation – Chicago Plenum Available
- Heavy gauge aluminum for new construction or remodel

Driver

- TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- Prewired and integral to housing
- Universal 120-277v

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: CR4WW-SA-Z-AP-C20-35-E1-P14-EM

Fixture	Trim	Mounting	Source / Watts	CCT	Driver / Control	Trim Finish	Accessories
CR4WW-SA							

Core 4" Square Adjustable Wall Wash

Flanged Trims	Flanged Housings	Citizen	24	C1	W	EM
F Flanged Trim	U Universal - Non IC Housing	C14 ●● 14W 679Lm 90+CRI, 60+R9	2400K	0-10 1.0%, UNV (120-277V) linear	White Paint	Emergency Pack
FS Flanged Shower Trim (for mounting choose from Flanged Housings)	AU ●● Universal IC/Airtight*	C20 21W 832Lm 90+CRI, 60+R9	3000K	C2 ELV/Triac 1.0%, (120V) linear		CP Chicago Plenum
Flangeless Trims	Flangeless Housings	C28 30W* 1069Lm 90+CRI, 60+R9	35	E1 0-10 0.1%, UNV (120-277V) log		Controls
Z Flangeless Trim	P Plaster	Tunable	40	E2 DALI-2 0.1%, UNV (120-277V) log		LR Lutron Wireless RF PowPak
ZS Flangeless Shower Trim (for mounting choose from Flangeless Housings)	AP ●● Plaster IC/Airtight*	T9 90+CRI, 60+R9 Tunable White	27	TW1840 1800-4000K Tunable White w/ E1, E2, E3, E4	E3 0-10 0.1%, UNV (120-277V) linear	ATH Lutron Athena Wireless Node
	PM Panel Mount	T15 90+CRI, 60+R9 Tunable White		TW2765 2700-6500K Tunable White w/ E1, E2, E3, E4	E4^ DMX 0.1%, UNV (120-277V) linear	Must be used with E2 driver
	APM ●● Panel Mount Airtight/IC*	T20 ●● 21W 90+CRI, 60+R9 Tunable White		RG1280 1200-8000K RGBW Dynamic Color Changing	RGBW-DMX ^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS	CA Casambi Wireless BLE to be paired with driver
	●● California Title Compliant	RGBW 90+CRI, 60+R9		Ambient Dim™	Ambient Dim™	
	* Cannot be used with C28 Source	A14 15W 461Lm 95+CRI, 90+R9	2722* 2700-2200K *A14 Only	LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1		
		A20 ●● 21W 858Lm 95+CRI, 90+R9	3019 3000-1900K	TR2 TruPhase™ 0.1%, (120-120V) log Up to 20W Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only		
		●● California Title 24 Compliant to JA8.	3022* 3000-2200K *A14 Only	* Not compatible with C28		
		* Requires Active Cooling, must be used with NIC housing. Not compatible with L2 and LP drivers.				

* See Wood Trim Guide
** Refer to Finish Guide


FINISH
GUIDE
LINK

WOOD
TRIM
GUIDE



Ceiling Cutouts and Dimensions

Deep Regress Shown - others similar


Square Flangeless Housing

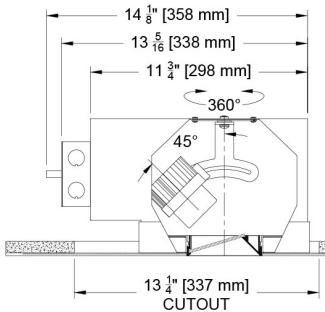


Plaster Mount (P/AP)

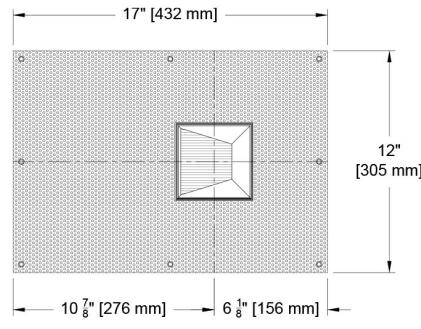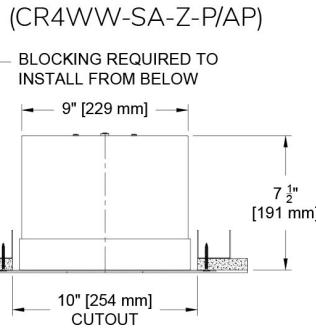


Square Flanged Housing

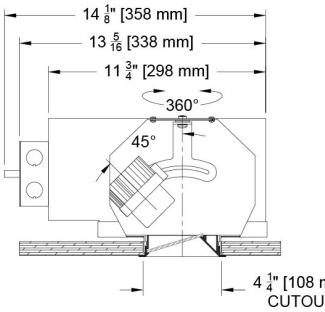


Flanged Mount (U/AU)

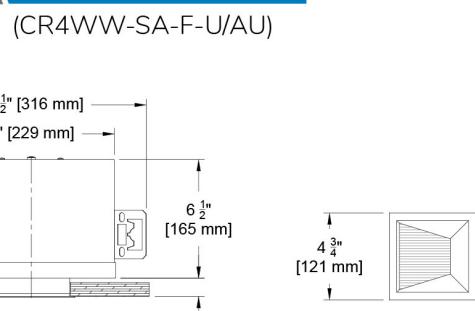


Square Flangeless Housing

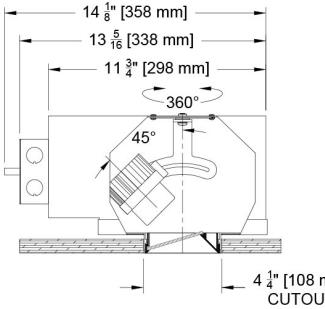

Flangeless Mount (U/AU)


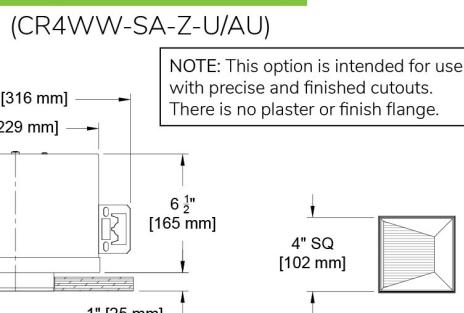


Square Flangeless Housing

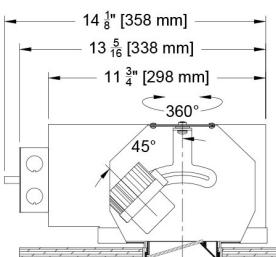

Panel Mount (PM/APM)

(CR4WW-SA-Z-PM/APM)

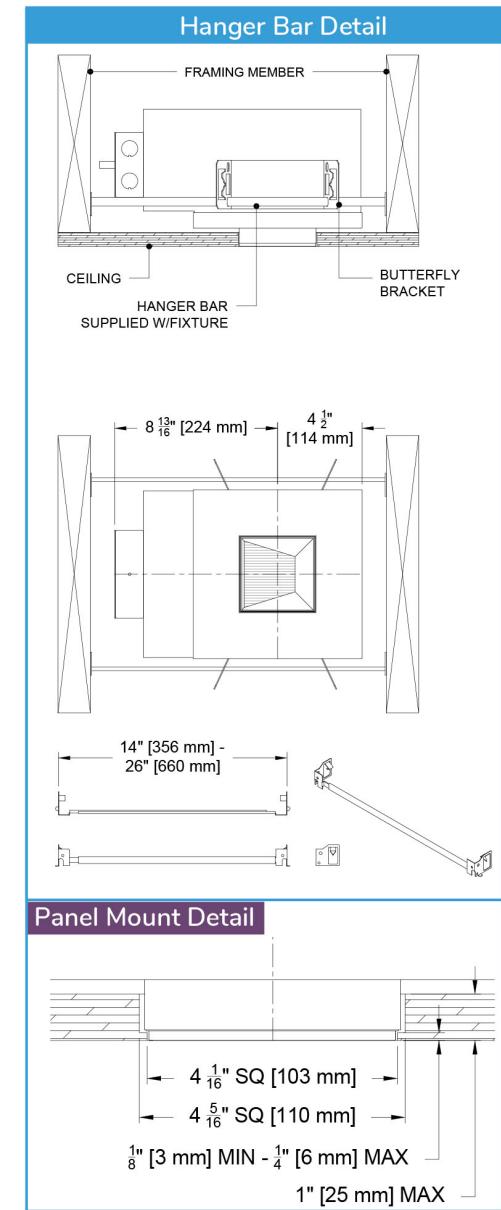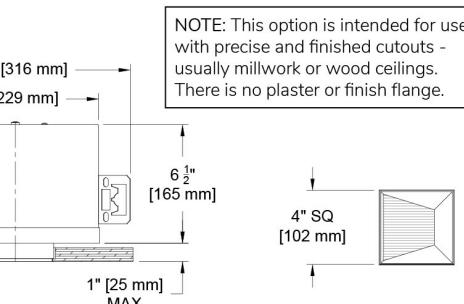



Photometric Table

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT. C28 source requires active cooling and must be used with NIC housing for required airflow. C14 is the only source to meet CA Title 24 /JA8 requirements. All values can vary +/-10% from source manufacturer rated flux range. All data taken from fixed fixture (CR4WW-SF) - contact your regional sales manager if tilt measurements are required

All data below is based from goniometer measurement of production representative product.
All lumen values can vary +/- 10% from LED manufacturer rated nominal flux.

SQUARE Wall Wash (CR4WW-SA)			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt
Citizen C14	14	679	49
Citizen C20	21	832	40
Citizen C28*	30	1069	35
Ambient Dim A14	15	461	31
CCT Multiplier			
CCT	Citizen		
2700	0.95		
3000	1.00		
3500	1.02		
4000	1.03		

All data based on 3000k in fixed position (CR4WW-SF). Ambient Dim based on 3000k at full output. *CZ8 requires active cooling and cannot be used with IC housing, Chicago Plenum or LP Driver.

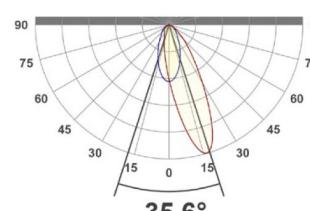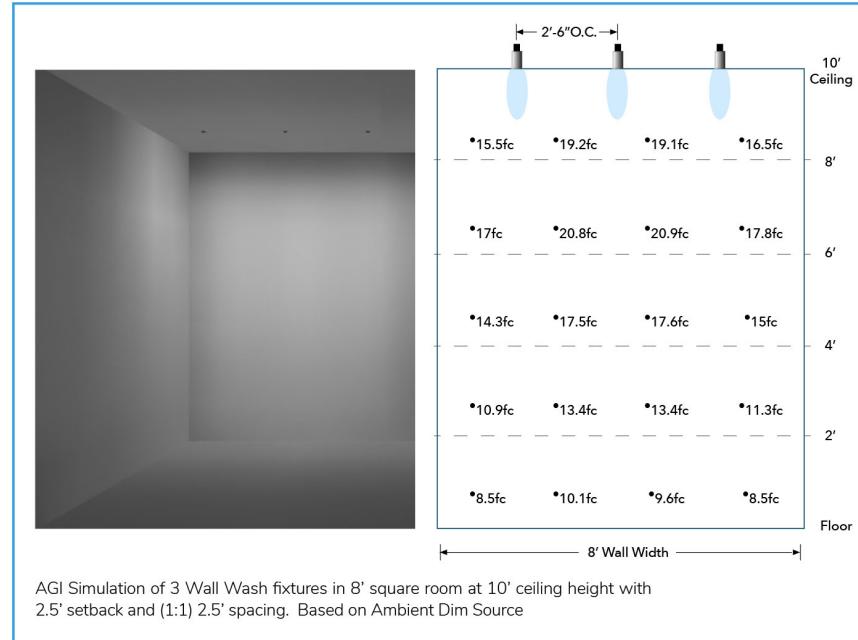



Color Data

All data is based from goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted

Citizen Sources - C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

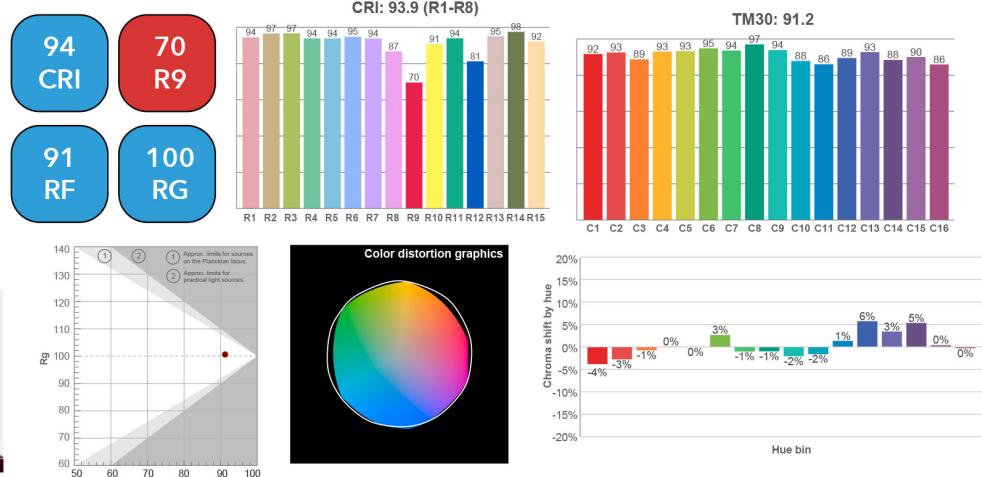

Ambient Dim - 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

