

Cor-Vet 4" Round Adjustable Downlight (102mm)




Core trims and mountings with Rivet light engine and adjusting
Adjustable Recessed Accent/Downlight

The Core Family meets the Rivet Family

Linking the timeless style and elegance of the Core fixture trims with the precision adjusting of the Rivet light engine, we form the Cor-Vet. The core trims offer 3 aperture options in 14 standard finishes, custom color match, RAL or our renowned custom wood trims. The Rivet light engine brings a precision engineered dual axis cam for 36° tilt hot aiming and a unique magnetic head mounting for easy 360° rotation. With a toolless drop down of the optic assembly for quick media placement, you can easily shape the finely tuned static white and Ambient Dim (warm dim) sources with up to 2 pieces of media. You have found the Round Cor-Vet 4" Adjustable Downlight and hope you enjoy the details.



Deep Regress shown

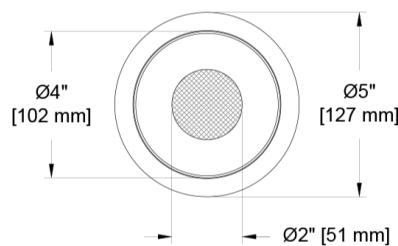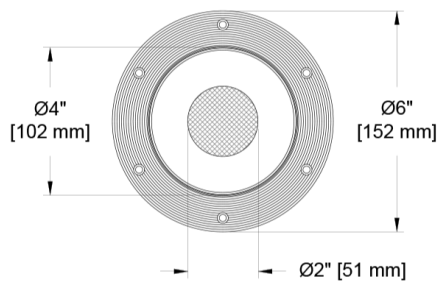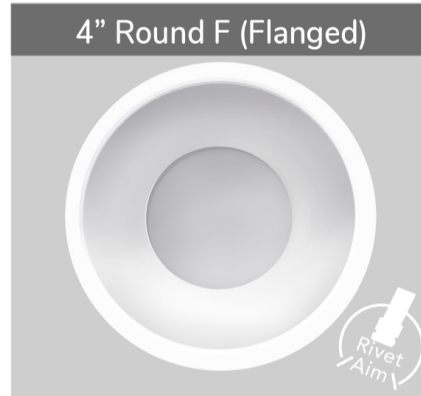


Aperture Options



Deep Regress (DR)
2" Optical Aperture



Flat (pinhole) (FL)
2" Optical Aperture



Open Regress (OR)
3" Optical Aperture



Wood Finish Available
with All apertures options

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CRV4D-RA)

Trim

- One-piece die cast aluminum or machined wood trim
- Flangeless includes plaster flange with lip
- 14 color options + custom RAL or wood available
- Flanged or Flangeless

Source / Optics

- Unique magnetic mounting of luminaire head promotes easy, full 360° rotational aiming, and allows toolless drop down of head for easy access to change optics, lens accessories and driver service.
- Precision engineered dual axis cam for vertical tilt aiming up to 36° allows luminaire to remain centered in aperture reducing beam clipping
- 3 beamspreads available - 20°, 28° and 40°
- Up to 965 delivered lumens
- <2 MacAdam Steps (<2SDCM) for fixed white
- 90 CRI , 60+ R9 Standard- 95 CRI 90+R9 Optional with Ambient Dim
- 2700, 3000, 3500, 4000K and Ambient Dim (3000k-1900k)
- Lifetime: L87B3>55,000 hours at 40°C Ambient

Housing

- Heavy gauge aluminum for new construction or remodel
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring
-  Listed – Damp or wet with shower trim
-  Fixture supports CA Title 24 compliance to JA8 requirements with Airtight Housing

Driver And Control

- TruPhase™, 0-10, DALI-2, Ecosystem or Wireless Control
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- Prewired and integral to housing
- Universal 120-277v

Cor-Vet 4" Round Adjustable Downlight (102mm)

Core trims and mountings with Rivet light engine and adjusting
Adjustable Recessed Accent/Downlight



Ordering Codes

PROJECT: SPECIFIER:
DATE: TYPE: QUANTITY:

Ordering Code Example: CRV4D-RA-DR-Z-AP-C20-35-20-E2-P16-91A-97L-CP-LR

FIXTURE	APERTURE	TRIM	MOUNTING	SOURCE / WATTS	CCT	BEAM	DRIVER / CONTROL	TRIM FINISH	LENS ACCESSORIES	ACCESSORIES
CRV4D-RA										
Cor-Vet 4" Round Adjustable Downlight with Rivet head	DR CorVet Deep Regress OR CorVet Open Regress FL CorVet Flat	Flanged Trims F Flanged Trim FS Flanged Shower Trim* (for mounting choose from Flanged Housings) Flangeless Trims Z Flangeless Trim ZS Flangeless Shower Trim* (for mounting choose from Flangeless Housings) * Aperture Lens Required	Flanged Housings U Universal - Non-IC Housing AU Airtight Universal IC-Rated Flangeless Housings P Plaster - Non-IC Housing AP Airtight Plaster IC-Rated PM Panel Mount APM Airtight Panel Mount IC-Rated ● Supports CA Title24 compliance	Citizen C7 9W 696Lm* 90+CRI, 60+R9 C11 13W 965Lm* 90+CRI, 60+R9 Ambient Dim™ A9 10W 547Lm* 95+CRI, 90+R9 3000 to 1900k A11 12W 629Lm* 95+CRI, 90+R9 3000 to 1900k ● Supports CA Title 24 Compliance to JA8 * Based on Rivet 20° beam All values based on Rivet photometry. Deep Regress and Flat apertures will experience beam clipping. Contact factory if exact photometry is required. View Photometry Table	27 2700K 30 3000K 35 3500K 40 4000K Ambient Dim™ 3019 3000-1900K	20 Spot 28 Narrow Flood 40 Flood	C1 0-10 1.0%, UNV (120-277V) linear C2 ELV/Triac 1.0%, (120V) linear E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear TR2 TruPhase™ 0.1%, (120-120V) log Up to 20W Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only EldoLED E4^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX ^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS Lutron LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1	W White Paint B Black Paint D Wood* PXX Specialty Paint Color* P01-P15 C Custom/RAL Color** * Wood "D" selection to be used with Z trim and PM mounting - Refer to Wood Trim Guide ** Refer to Finish Guide FINISH GUIDE LINK WOOD TRIM GUIDE	Aperture Lens 91A Solite 93A Frosted XXA Other Aperture Lens Treatments* Reflector (lamp) Media 91L Solite 93L Frosted 97L Black Hexcel Louver XXL Other reflector (lamp) media* 1 piece of media for aperture opening and 2 pieces for lamp (reflector) can be selected. *See Lens Accessory Guide LENS ACCESSORY VISUAL GUIDE LINK	CP Chicago Plenum EM Emergency Pack* *Remote Required EMP Emergency Pack with phase cut control system utilizing C1 driver Controls LR Lutron Wireless RF PowPak ATH Lutron Athena Wireless Node Must be used with E2 driver CA Casambi Wireless BLE to be paired with driver

Cor-Vet 4" Round Adjustable Downlight (102mm)

Core trims and mountings with Rivet light engine and adjusting
Adjustable Recessed Accent/Downlight


Ceiling Cutouts and Dimensions

Deep Regress Shown - others similar


Round Flangeless Housing

Plaster Mount (P/AP)

(CRV4D-RA-DR-Z-P/AP)

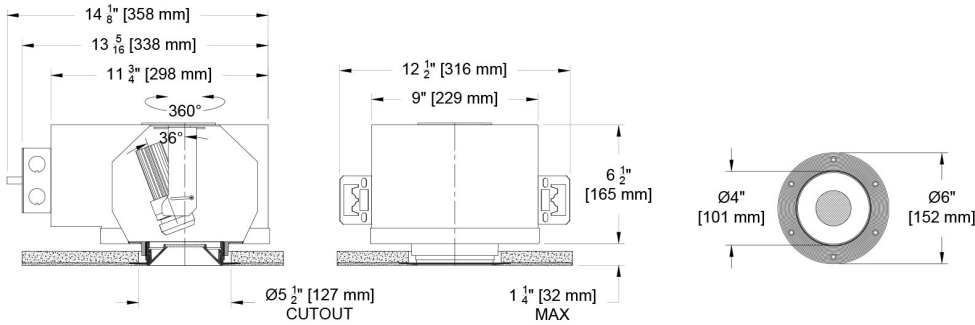



Hanger Bar Detail

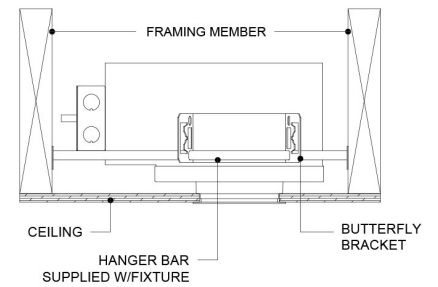

Round Flanged Housing

Flanged Mount (U/AU)


(CRV4D-RA-DR -F-U/AU)

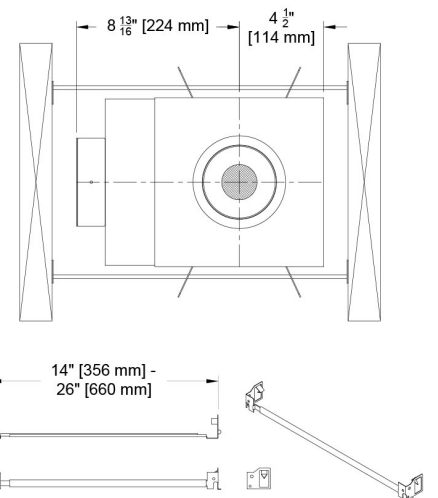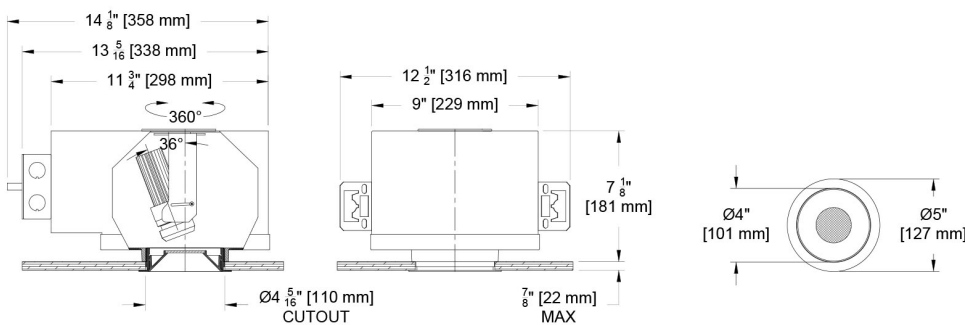


Round Flangeless Housing

Panel Mount (PM/APM)

(CRV4D-RA-DR -P-PM/APM)

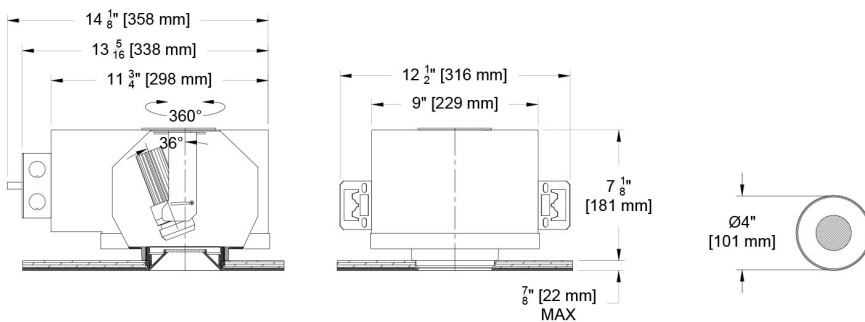

Panel Mount Detail



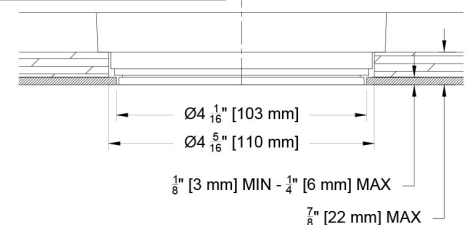


Cor-Vet 4" Round Adjustable Downlight (102mm)

Core trims and mountings with Rivet light engine and adjusting
Adjustable Recessed Accent/Downlight



Photometric Table All data is based from goniometer measurements of production representative Rivet product. The Rivet head is common to both fixtures and will have similar photometrics. The Core Deep Regress and Flat apertures will experience additional beam clipping. Contact factory if photometry of a particular combination is required. All lumen values can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT and Ambient Dim at full output.

ROUND Beamspreads			20°				28°				40°			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lumens/ Watt	Peak CD	10% Field	
Citizen C7	9	696	82	3520	48°	632	74	2101	52°	644	76	1143	54°	
Citizen C11	13	965	77	4962	48°	875	69	2918	52°	888	70	2046	54°	
Ambient Dim A9	10	547	54	2145	50°	484	48	1358	54°	514	51	1166	54°	
Ambient Dim A11	12	629	52	2470	50°	565	47	1603	54°	592	49	1341	53°	
CCT Multiplier		Beam angle 				Beam angle 				Beam angle 				
CCT	Citizen													
2700	0.95													
3000	1.00													
3500	1.02													
4000	1.03													


ISO cd Plots based upon C11 Source. Refer to photometry tab on product page for exact ISO cd plot and IES files.

Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT


Citizen Sources - C7 and C11

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

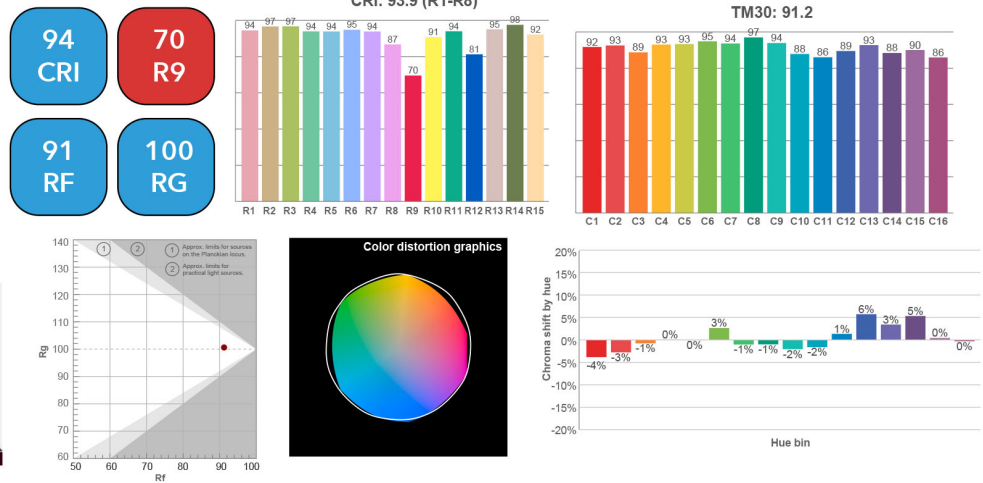


Ambient Dim Source A9, A11 (AD - 3000k to 1900k)

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

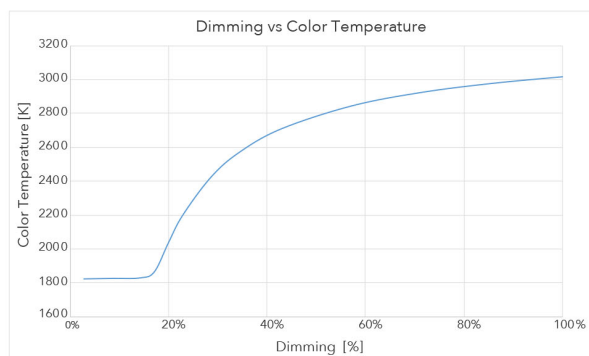

3000 CCT Full Output

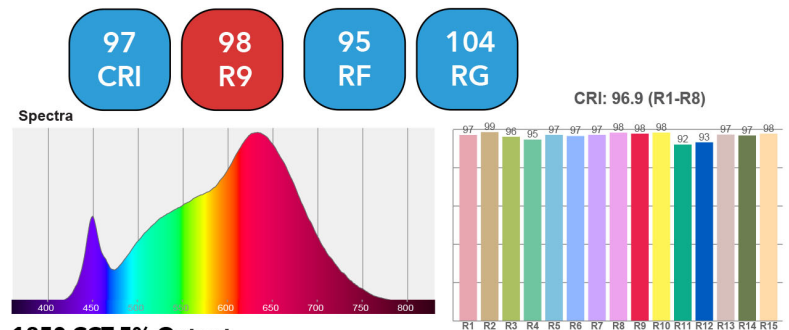

1850 CCT 5% Output

