
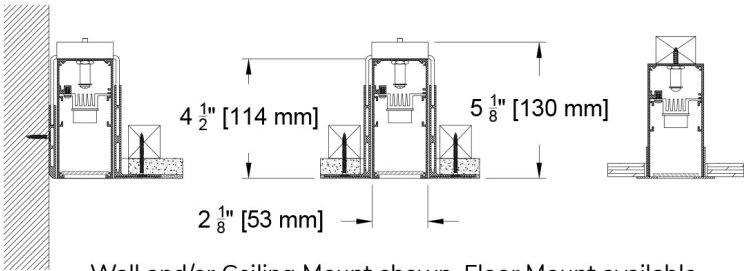


The GrazeFall Family

Welcome to GrazeFall, our family of premier linear wall grazers for highlighting beautiful materials and feature walls, revealing textures by contrasting light and shadow. This high performance 2" (55mm) lensed wall grazer is intended for walls up to 15 feet high and can be installed in the ceiling or in the floor as an uplight grazer. The continuous system can be specified to custom lengths at 6" increments with the option of flush or regressed lensed positions and a choices of flanged or flangeless trims in the ceilings. The narrow profile fixture is ideally suited to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, wood, or specular surfaces such as polished stone or stainless steel. The 2" GrazeFall family has additional product offerings, including baffled fixtures and wall mounted surface fixtures.

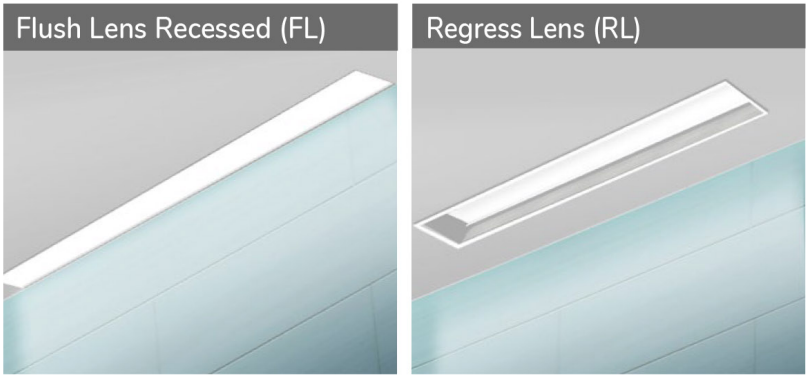

Wall and/or Ceiling Mount shown. Floor Mount available

PROJECT: TYPE:  
SPECIFIER: DATE:

Key Points (GZ2L-RM)

- Trim
- 15 color options + Custom and RAL# available.
  - Sealed walk-over lens for interior up-light applications.
  - Shower Trim is fully sealed and gasketed.
  - Flanged or Flangeless.

- Source Optics
- Up to 608 lm/ft available in static white.
  - 90+ CRI and 60+ R9 for static white.
  - CCT offerings - 2700k, 3000k, 3500k and 4000k.
  - Dynamic tunable white in two ranges: 1800-4000k and 2700-6500k.
  - RGBW available with DMX control.
  - Veiling Acrylic lens standard - other lens types available.

- Housing
- Inside and outside 'L' configurations are available for corners and wrap arounds.
  - Recessed ceiling or floor mounting.
  - Ⓢ, Damp listed - Wet listed with Shower Trim or IH (up-light) housing.
  - 6" specification increments (Integral Driver requires minimum of 2' and may influence 6" specification increment)

- Driver And Control
- 1% dimming standard - 0.1% available.
  - 0-10v, DALI-2, Lutron Ecosystem, EldoLED and DMX options available.
  - Flicker Free to IEEE 1789-2015.
  - Universal 120v to 277v.

Aperture and Mounting Options




Flush Lens Recessed (FL)  
Formerly 801-LED-PH/FH



Flush Lens Up Light (FL)  
Formerly 801-LED-IH



Regress Lens (RL)  
Formerly 805-LED-PH/FH

| InRelief 2" Lensed |                |                     | 18° x 50°                |              |         |           | Asymetric ISO CD Plot                                                                |                |     |  |
|--------------------|----------------|---------------------|--------------------------|--------------|---------|-----------|--------------------------------------------------------------------------------------|----------------|-----|--|
| Lens Type          | Source         | System watts (W/ft) | Delivered Lumens (lm/ft) | Lumens/ Watt | Peak CD | 10% Field | 18° across width x 50° along run                                                     | CCT Multiplier |     |  |
| Flush Lens (FL)    | SNL8 (800/801) | 8                   | 462                      | 55           | 724     | 78°       |  | 2700           | 0.9 |  |
|                    | SNL11          | 11                  | 608                      | 53           | 953     | 78°       |                                                                                      | 3000           | 1   |  |
| Regress Lens (RL)  | SNL8           | 8                   | 454                      | 54           | 733     | 78°       |                                                                                      | 3500           | 1   |  |
|                    | SNL11          | 11                  | 598                      | 52           | 962     | 78°       |                                                                                      |                |     |  |

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:


Ordering Code Example: GZ2L-RM-RL-Z-3U-102"-SNL11-30-SY1-P24-79A-ST

| FIXTURE                                | APERTURE                                     | TRIM                                          | MOUNTING                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | LENGTH                                                                                               | SOURCE / WATTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | CCT                                                                                                                                                                                             | DRIVER / CONTROL                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | HOUSING FINISH                                                                                                                                                                                                                                    | LENS ACCESSORIES                                                                                                                                                                                         | ACCESSORIES                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------|----------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GZ2L-RM                                |                                              |                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                   |                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| GrazeFall 2" Linear Lensed Wall Grazer | FL<br>Flush Lens<br><br>RL<br>Regressed Lens | F<br>Flanged Trim<br><br>Z<br>Flangeless Trim | Flanged Housings<br><br>FH ●● Flanged Housing<br><br>Flangeless Housings<br><br>IH ●● Up-light always flangeless to be flush with floor<br><br>1U ●● 1 sided plaster flange for Wall-Ceiling Mount where fixture has wall on 3 sides<br><br>3U ●● 3 sided plaster flange for Wall-Ceiling Mount where fixture has wall on 1 sides<br><br>4U ●● 4 sided plaster flange for recessed ceiling mount<br><br>Note - All housings are airtight by design<br>●● CA Title 24 Compliant to JA8 | —<br>Specify in inches exact length in increments of 6" minimum and 24" minimum with integral driver | SNL8 ●● 8W/ft 462Lm/ft** 90+CRI, 60+R9 Specialty Board*<br><br>SNL11 ●● 11W/ft 608Lm/ft** 90+CRI, 60+R9 Specialty Board*<br><br>Tunable<br><br>TWSL10 11W/ft 1300Lm/ft (source lumens at mid CCT range) 90+CRI, 60+R9 Specialty Tunable White Board +<br><br>RGBWSL18 18W/ft 1000Lm/ft (source lumens) 90+CRI, 60+R9 Specialty RGBW Color Tunable Board ++<br><br>* Rigid Linear board with 2W capable LEDs, 50mm OC with collimating optic<br><br>** Based on Flush Lens Aperture.<br><br>+ Rigid Linear tunable white board with 3.3W capable LEDs, 50mm OC with 30° optic (must specify CCT range and E22 Tunable White)<br><br>++ Rigid Linear RGBW color tunable board with 5W capable LEDs, 50mm OC with 30° optic (must specify with DMX driver option)<br><br>●● CA Title 24 Compliant to JA8 | 27 2700K<br><br>30 3000K<br><br>35 3500K<br><br>40 4000K<br><br>Tunable<br><br>1840 1800-4000K Tunable White<br><br>2765 2700-6500K Tunable White<br><br>RGBW 1200-8000K Dynamic Color Changing | SY1 0-10 1.0%, UNV (120-277V) linear<br><br>E1 0-10 0.1%, UNV (120-277V) log<br><br>E2 DALI-2 0.1%, UNV (120-277V) log<br><br>E3 0-10 0.1%, UNV (120-277V) linear<br><br>SY2 0-10 1.0%, UNV (120-277V) log<br><br>Lutron<br><br>LD Digital Ecosystem* 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1<br><br>EldoLED<br><br>E22 0-10* 0.1%, UNV (120-277V) log 2 Channel for Tunable White<br><br>Tunable<br><br>RGBW-DMX DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller | W<br>White Paint<br><br>B<br>Black Paint<br><br>PXX<br>Specialty Paint Color*<br>P01-P15<br><br>C<br>Custom/RAL*<br><br>*See Finish Guide<br>Note: Flanged Trim can have alternative finish - contact factory if desired<br><br>FINISH GUIDE LINK | Aperture Lens<br><br>79A Veiling Acrylic<br><br>91A Solite<br><br>Walk Over Lens<br><br>CP84 Residential Clear<br><br>SP84 Frosted<br><br>Note: Use walk over lens selections with IH - up-light housing | CP<br>Chicago Plenum<br><br>ST<br>Shower Trim<br><br>LC<br>Lens Clip<br><br>BABA<br><br>BABA Products<br><br>IS9X Inside 90° Corner*<br><br>CA<br>Casambi Wireless BLE to be paired with driver<br><br>OS9X Outside 90° Corner*<br><br>Controls<br><br>LR<br>Lutron Wireless RF PowPak<br><br>ATH<br>Lutron Athena Wireless Node<br>Must be used with E2 driver<br><br>*X=specify number of corners |


# Ceiling Cutouts and Dimensions

To achieve best results, Specialty recommends to mount the fixture as close to the wall as possible. All drawings show closest possible mounting condition. Ceiling blocking is required and shown with a "X" in a box as a reference. Blocking will vary based on construction conditions and should be detailed on submittal drawings to define construction method and final wall offsets.

## GZ2L- Recessed Flush Lens Flanged Housing FL-FH

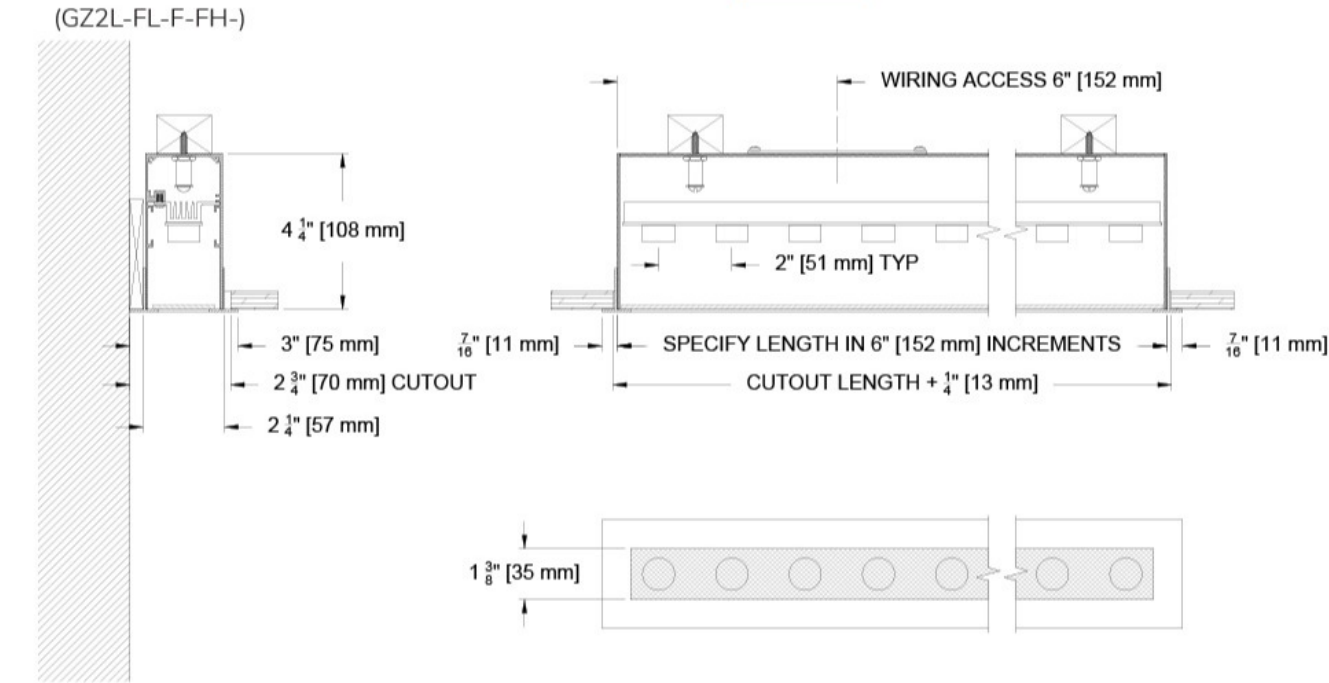

## GZ2L- Regressed Lens Flanged Housing RL-FH

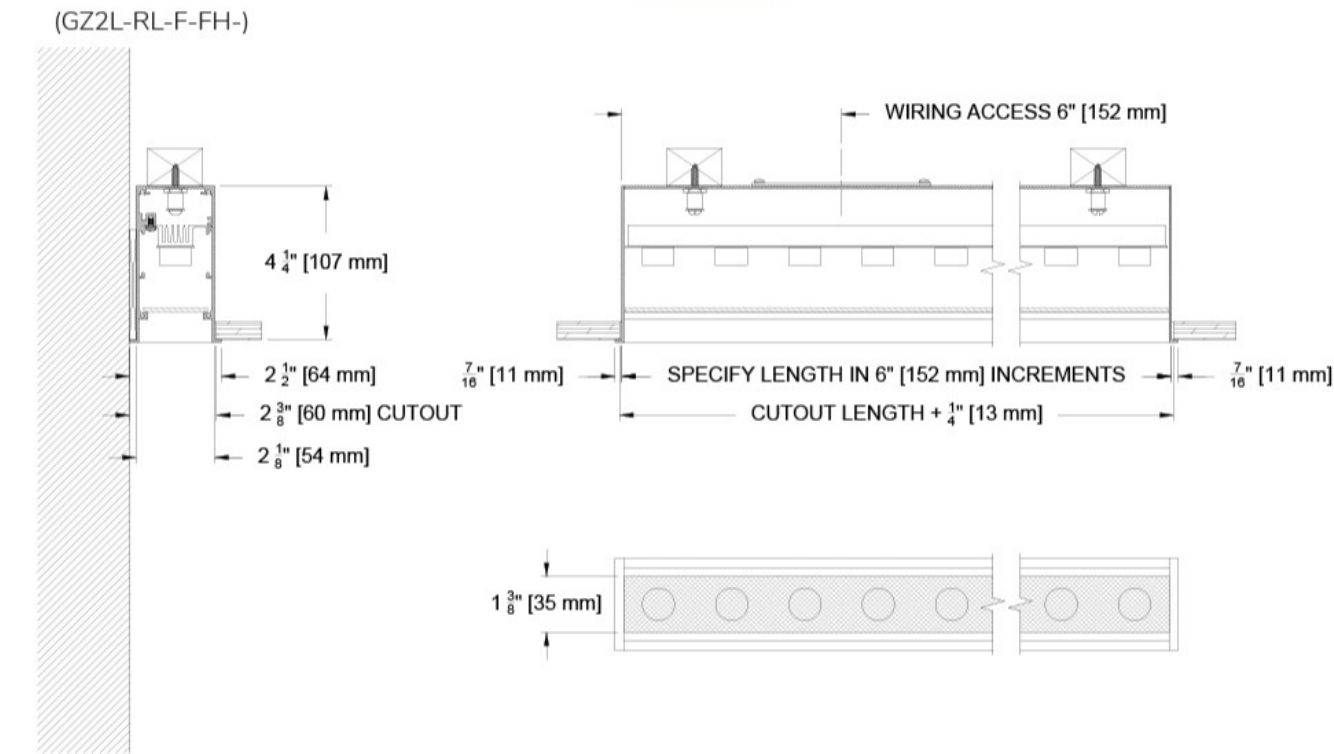


## Ceiling Cutouts and Dimensions

### GZ2L- Recessed Flush Lens 3 Sided with Wall Mount

FL-3U


(GZ2L-FL-Z-3U-)

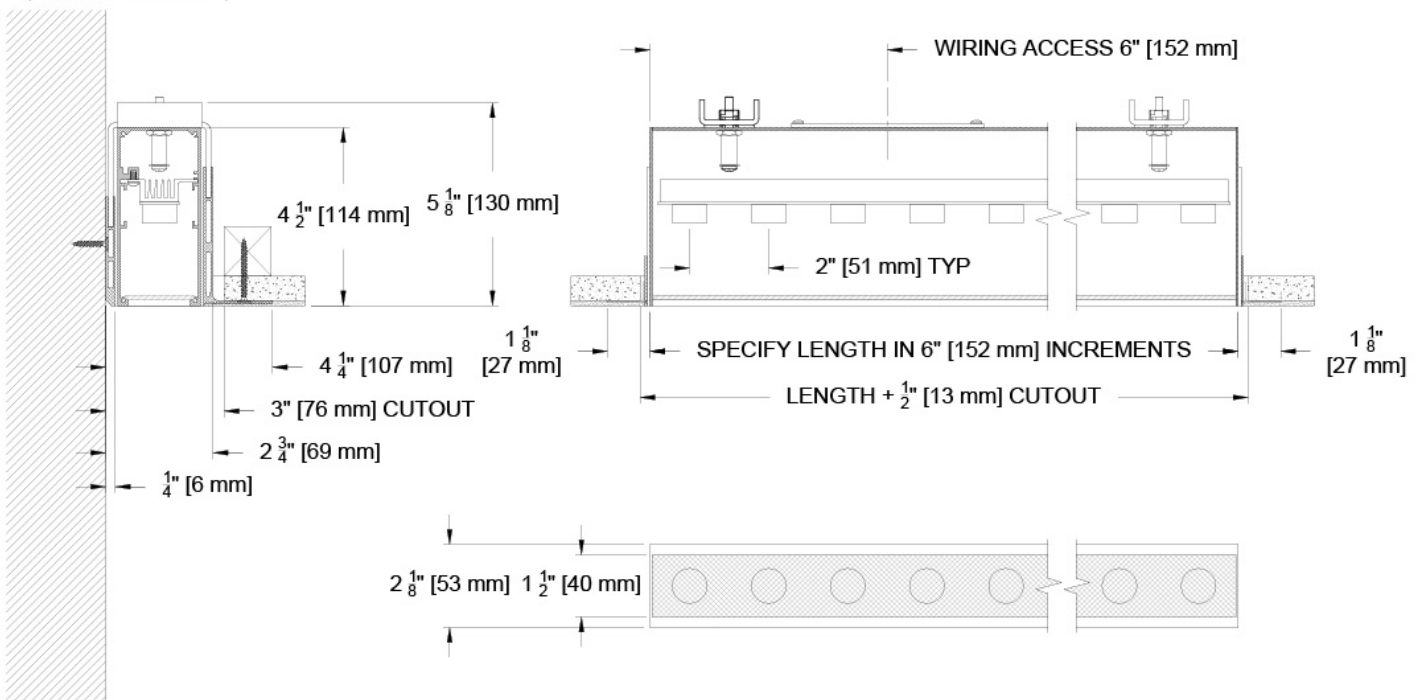

### GZ2L- Recessed Flush Lens 4 Sided Plaster Flange

FL-4U

(GZ2L-FL-Z-4U-)

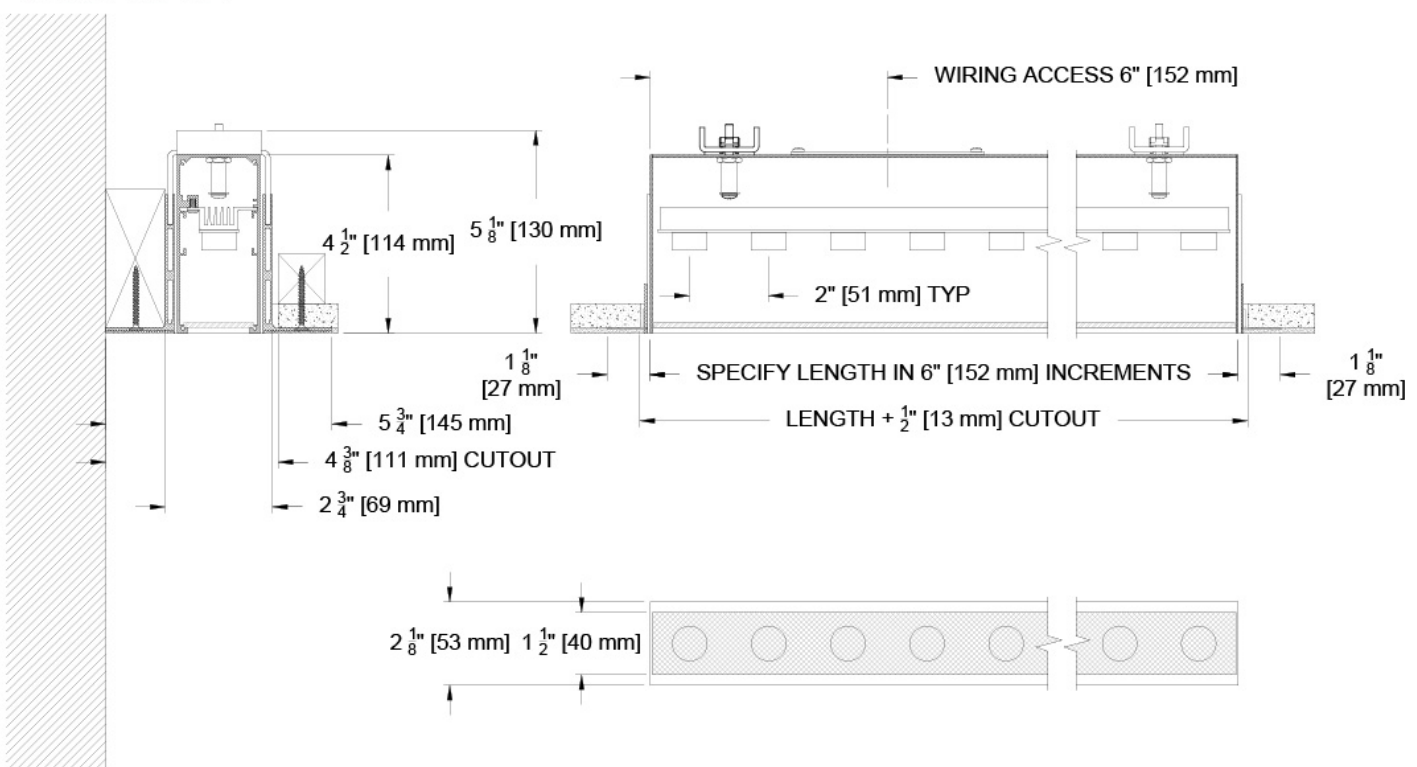







# Ceiling Cutouts and Dimensions

GZ2L- Flush Lens In Floor Housing FL-IH

(GZ2L-FL-Z-IH-)

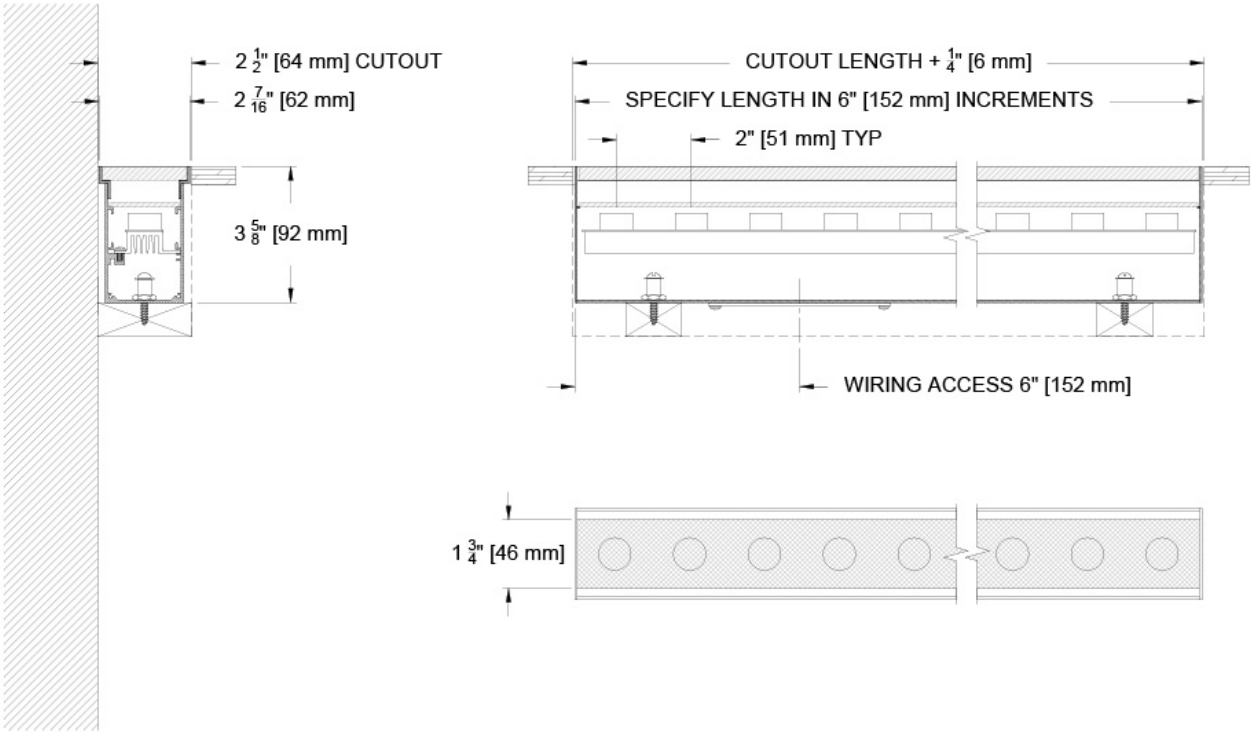

**Photometric Table** All data is based from goniometer measurements of production representative product. All lumen values are delivered or derived and can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT and Ambient Dim at full output. All photometry is used with a veiling acrylic (79A) lens other lens selections will modify the lumen output and exact beam spread. If photometry is required with a specific lens treatment contact your regional sales manager for a special measurement.

| InRelief 2" Lensed |        |                     | 18° x 50°                |              |         |           | Asymetric ISO CD Plot                                                              |                |     |  |
|--------------------|--------|---------------------|--------------------------|--------------|---------|-----------|------------------------------------------------------------------------------------|----------------|-----|--|
| Lens Type          | Source | System watts (W/ft) | Delivered Lumens (lm/ft) | Lumens/ Watt | Peak CD | 10% Field | 18° across width x 50° along run                                                   | CCT Multiplier |     |  |
| Flush Lens (FL)    | SNL8   | 8                   | 462                      | 55           | 724     | 78°       |  | 2700           | 0.9 |  |
|                    | SNL11  | 11                  | 608                      | 53           | 953     | 78°       |                                                                                    | 3000           | 1   |  |
| Regress Lens (RL)  | SNL8   | 8                   | 454                      | 54           | 733     | 78°       |                                                                                    | 3500           | 1   |  |
|                    | SNL11  | 11                  | 598                      | 52           | 962     | 78°       |                                                                                    |                |     |  |

Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted.

SNL8 / SNL11

Specialty Linear Board

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1 and 16

