


The GrazeFall Family

The GrazeFall family of premier linear wall grazers includes this surface mounted lensed version. This high performance 2" (55mm) fixture is designed to highlight walls up to 15 feet high, featuring materials and revealing textures by contrasting light and shadow. The surface mounted housing can be mounted continuously and built to custom lengths in 6" increments with flush or regressed lens positions. The narrow profile fixture is ideal suited to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, wood, or specular surfaces such as polished stone or stainless steel. The 2" GrazeFall family has additional product offerings, including surface mounted with baffles and an array of recessed options.

2" Surface Mt- (Flush Lens)

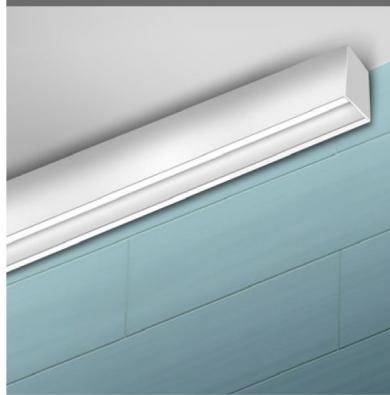

2" Surface Mt- (Regress Lens)



PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (GZ2L-SM)

Trim

- Regressed or flush lens options.
- Shower Trim is fully sealed and gasketed.

Source Optics

- Up to 608 lm/ft available
- 90+ CRI and 60+ R9
- CCT offerings - 2700k, 3000k, 3500k and 4000k.
- Dynamic tunable white in two ranges: 1800-4000k and 2700-6500k.
- RGBW available with DMX control.
- Veiling Acrylic lens standard - other lens types available



Housing

- 15 paint finish options + custom/RAL.
- Inside and outside "L" configurations are available for corners and wrap arounds.
- Damp listed - Wet listed with Shower Trim.
- 6" specification increments (Integral Driver requires minimum of 2" and may influence 6" specification increment).

Driver And Control

- 1% dimming standard - 0.1% available
- 0-10v, DALI, Lutron Ecosystem, EldoLED and DMX options available.
- Flicker Free to IEEE 1789-2015
- Universal 120v to 277v.

Aperture Options

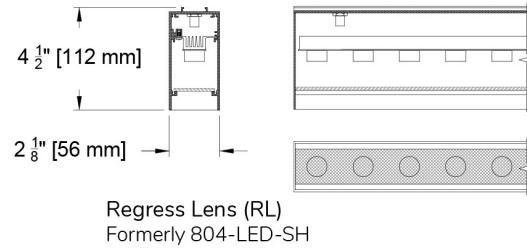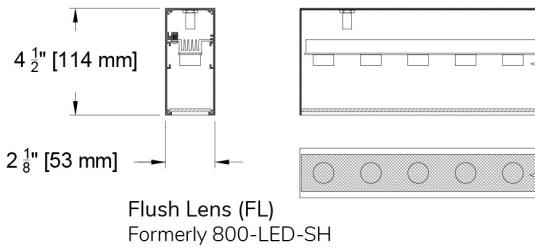

InRelief 2" Lensed		System watts (W/ft)	18° x 50°			10% Field	Asymmetric ISO CD Plot	CCT Multiplier	
Lens Type	Source		Delivered Lumens (lm/ft)	Lumens/Watt	Peak CD			2700	0.9
Flush Lens (FL)	SNL8	8	462	55	724	78°		3000	1
	SNL11	11	608	53	953	78°		3500	1
Regress Lens (RL)	SNL8	8	454	54	733	78°			
	SNL11	11	598	52	962	78°			

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: GZ2L-SM-RL-102-SNL11-30-SY1-P24-79A


Fixture	Aperture	Length	Source / Watts	CCT	Driver / Control	Housing Finish	Lens Accessories	Accessories
GZ2L-SM								
GrazeFall 2" Linear Lensed Wall Grazer - Surface	FL Flush Lens	Specify in inches exact length in increments of 6" minimum and 24" minimum with integral driver	SNL8 ●● 8W/ft 462Lm/ft** 90+CRI, 60+R9 Specialty Board*	27 2700K	SY1 0-10 1.0%, UNV (120-277V) linear	W White Paint 	Aperture Lens 79A Veiling Acrylic	ST Shower Trim
	RL Regressed Lens		SNL11 ●● 11W/ft 608Lm/ft** 90+CRI, 60+R9 Specialty Board*	30 3000K	SY2 0-10 1.0%, UNV (120-277V) log	B Black Paint 	LC Lens Clip	LC Lens Clip
			Tunable	35 3500K	Lutron	PXX Specialty Paint Color*	IS9X Inside 90° Corner*	IS9X Inside 90° Corner*
			TWSL10 11W/ft 1300Lm/ft (source lumens at mid CCT range) 90+CRI, 60+R9 Specialty Tunable White Board +	40 4000K	LD Digital Ecosystem* 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1	P01-P15 	OS9X Outside 90° Corner*	OS9X Outside 90° Corner*
			RGBWSL18 18W/ft 1000Lm/ft (source lumens) 90+CRI, 60+R9 Specialty RGBW Color Tunable Board ++	1840 1800-4000K Tunable White	EldoLED	C Custom/RAL#*	Controls LR Lutron Wireless RF PowPak	Controls LR Lutron Wireless RF PowPak
			* Rigid Linear board with 2W capable LEDs, 50mm OC with collimating optic	2765 2700-6500K Tunable White	E1 0-10 0.1%, UNV (120-277V) log		ATH Lutron Athena Wireless Node Must be used with E2 driver	ATH Lutron Athena Wireless Node Must be used with E2 driver
			** Based on Flush Lens Aperture.	RGBW 1200-8000K Dynamic Color Changing	E2 DALI-2 0.1%, UNV (120-277V) log	E22 0-10* 0.1%, UNV (120-277V) log 2 Channel for Tunable White	CA Casambi Wireless BLE to be paired with driver	CA Casambi Wireless BLE to be paired with driver
			+ Rigid Linear tunable white board with 3.3W capable LEDs, 50mm OC with 30° optic (must specify CCT range and E22 Tunable White)		E3 0-10 0.1%, UNV (120-277V) linear	Tunable RGBW-DMX DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller	*X=specify number of corners	*X=specify number of corners
			++ Rigid Linear RGBW color tunable board with 5W capable LEDs, 50mm OC with 30° optic (must specify with DMX driver option)					
			●●CA Title 24 Compliant to JA8					
								

Ceiling Cutouts and Dimensions

To achieve best results, Specialty recommends to mount the fixture as close to the wall as possible. All drawings show closest possible mounting condition. Ceiling blocking is required and shown with a "X" in a box as a reference. Blocking will vary based on construction conditions and should be detailed on submittal drawings to define construction method and final wall offsets.


GZ2L- Surface Mount Flush Lens

(GZ2L-S-FL-)

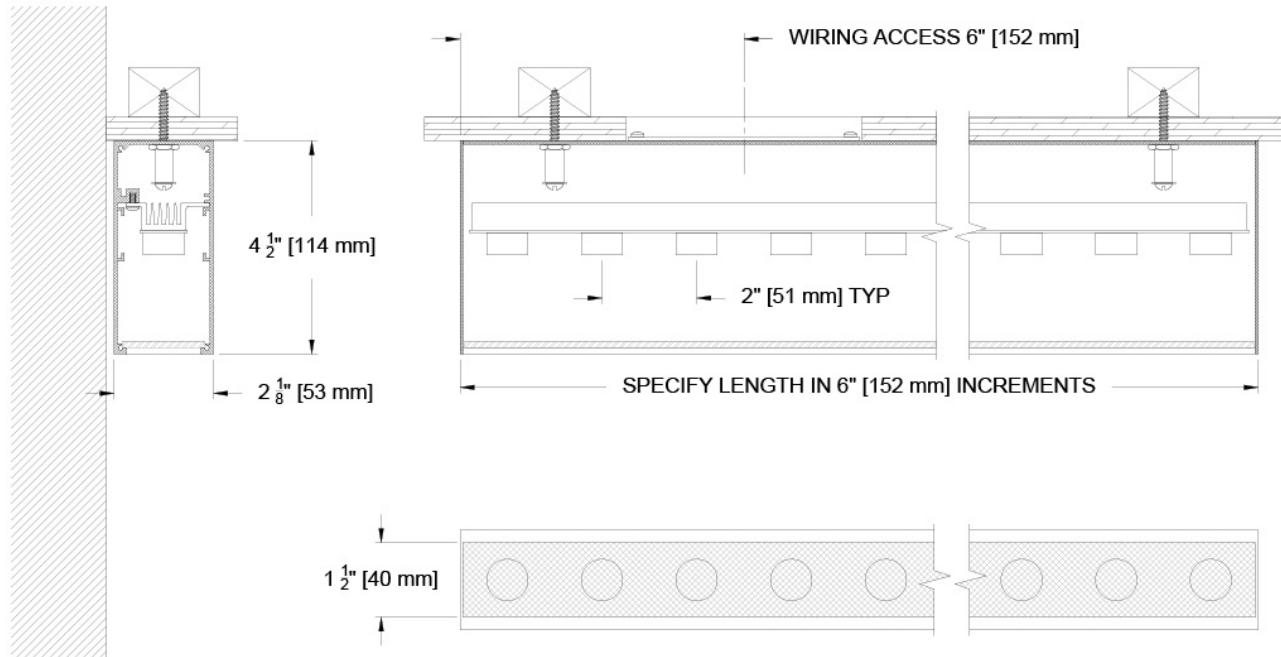



GZ2L- Surface Mount Regressed Lens

(GZ2L-S-RL-)

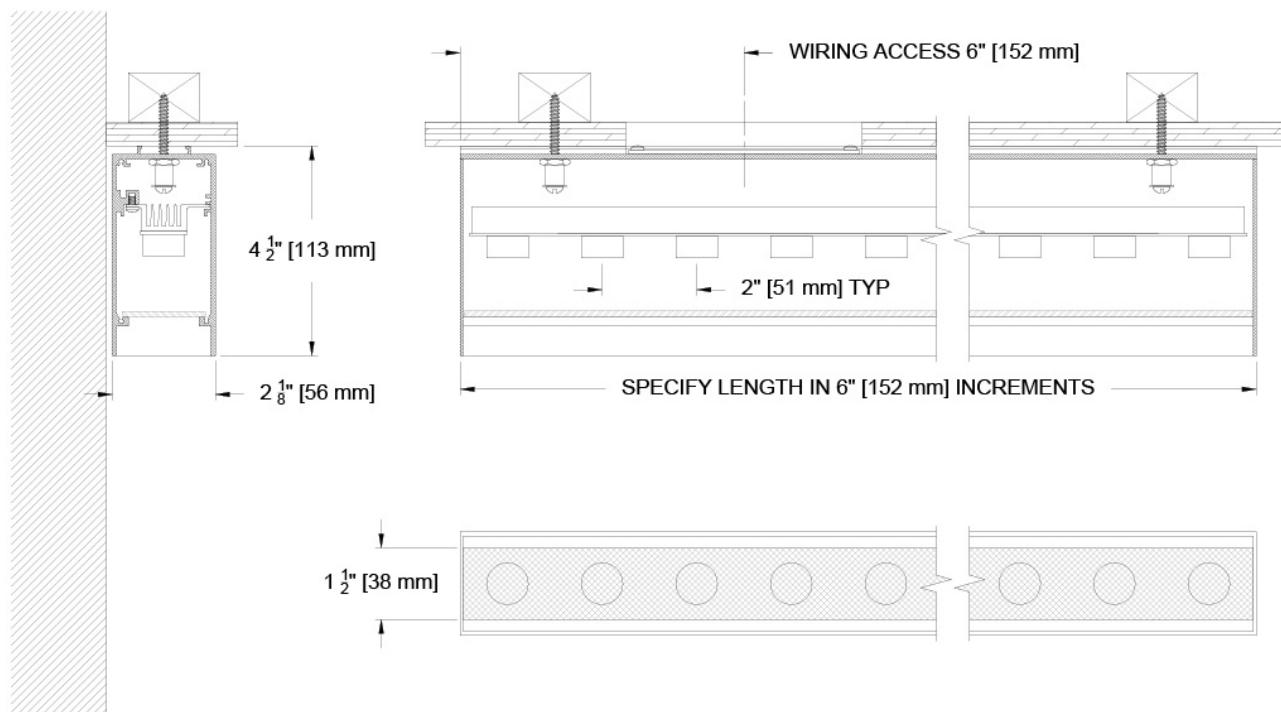

Photometric Table

All data is based from goniometer measurements of production representative product. All lumen values are delivered or derived and can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT and Ambient Dim at full output. All photometry is used with a veiling acrylic (79A) lens other lens selections will modify the lumen output and exact beam spread. If photometry is required with a specific lens treatment contact your regional sales manager for a special measurement.

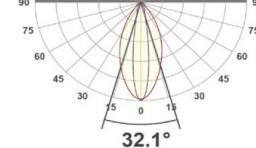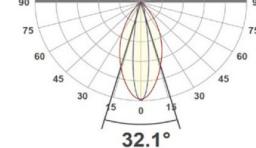InRelief 2" Lensed			18° x 50°			Asymmetric ISO CD Plot				
Lens Type	Source	System watts (W/ft)	Delivered Lumens (lm/ft)	Lumens/ Watt	Peak CD	10% Field	18° across width x 50° along run		CCT Multiplier	
Flush Lens (FL)	SNL8	8	462	55	724	78°	 32.1°	2700	0.9	
	SNL11	11	608	53	953	78°		3000	1	
Regress Lens (RL)	SNL8	8	454	54	733	78°	 32.1°	3500	1	
	SNL11	11	598	52	962	78°				

Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted.

SNL8 / SNL11

Specialty Linear Board

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1 and 16

