GrazeFall 2" Lensed Wall Grazer (55mm)

Formerly 800 and 804


Surface Mount Narrow Aperture Linear Wall Grazer

PROJECT: TYPE:

SPECIFIER: DATE:


The GrazeFall Family

The GrazeFall family of premier linear wall grazers includes this surface mounted lensed version. This high performance 2" (55mm) fixture is designed to highlight walls up to 15 feet high, featuring materials and revealing textures by contrasting light and shadow. The surface mounted housing can be mounted continuously and built to custom lengths in 6" increments with flush or regressed lens positions. The narrow profile fixture is ideal suited to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, wood, or specular surfaces such as polished stone or stainless steel. The 2" GrazeFall family has additional product offerings, including surface mounted with baffles and an array of recessed options.

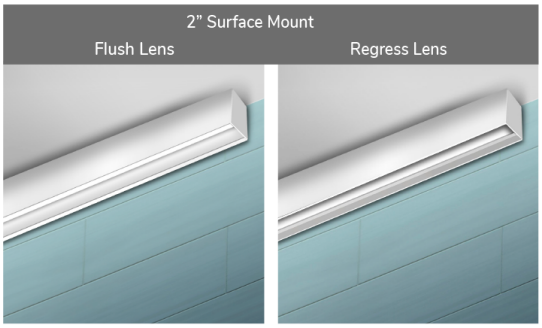


Aperture Options

Closet Rated

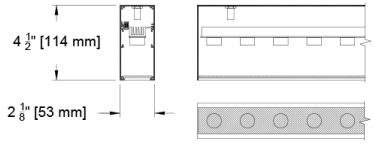

Flush Lens (FL)
Formerly 800-LED-SH

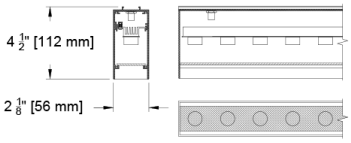

Regress Lens (RL)
Formerly 804-LED-SH

Key Points (GZ2L-SM)

Trim

- Regressed or flush lens options.
- Shower Trim is fully sealed and gasketed.

Source Optics


- Up to 608 lm/ft available
- 90+ CRI and 60+ R9
- CCT offerings - 2700k, 3000k, 3500k and 4000k.
- Dynamic tunable white in two ranges: 1800-4000k and 2700-6500k.
- RGBW available with DMX control.
- Veiling Acrylic lens standard - other lens types available

Housing

- 15 paint finish options + custom/RAL.
- Inside and outside "L" configurations are available for corners and wrap arounds.
- Damp listed - Wet listed with Shower Trim.
- 6" specification increments (Integral Driver requires minimum of 2' and may influence 6" specification increment).

Driver And Control

- 1% dimming standard - 0.1% available
- 0-10v, DALI, Lutron Ecosystem, EldoLED and DMX options available.
- Flicker Free to IEEE 1789-2015
- Universal 120v to 277v.

InRelief 2" Lensed			18° x 50°				Asymetric ISO CD Plot		
Lens Type	Source	System watts (W/ft)	Delivered Lumens (lm/ft)	Lumens/ Watt	Peak CD	10% Field	18° across width x 50° along run	CCT Multiplier	
Flush Lens (FL)	SNL8	8	462	55	724	78°		2700	0.9
	SNL11	11	608	53	953	78°		3000	1
Regress Lens (RL)	SNL8	8	454	54	733	78°		3500	1
	SNL11	11	598	52	962	78°			

© 2026 Specialty Lighting Industries

These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

GrazeFall 2" Lensed Wall Grazer (55mm)

Formerly 800 and 804

Surface Mount Narrow Aperture Linear Wall Grazer

specialty lighting industries

Ordering Codes

PROJECT: SPECIFIER:

DATE: TYPE: QUANTITY:

Ordering Code Example: GZ2L-SM-RL-102-SNL11-30-SY1-P24-79A

FIXTURE	APERTURE	LENGTH	LUMENS / WATTS	CCT	DRIVER / CONTROL	HOUSING FINISH	LENS ACCESSORIES	ACCESSORIES
GZ2L-SM								
GrazeFall 2" Linear Lensed Wall Grazer - Surface Mount	FL Flush Lens RL Regressed Lens	__ Specify in inches exact length in increments of 6" minimum and 24" minimum with integral driver	SNL8 🟢🟤 8W/ft 462Lm/ft** 90+CRI, 60+R9 Specialty Board* SNL11 🟢🟤 11W/ft 608Lm/ft** 90+CRI, 60+R9 Specialty Board* **Tunable** TWSL10 11W/ft 1300Lm/ft (source lumens at mid CCT range) 90+CRI, 60+R9 Specialty Tunable White Board + RGBWSL18 18W/ft 1000Lm/ft (source lumens) 90+CRI, 60+R9 Specialty RGBW Color Tunable Board ++ * Rigid Linear board with 2W capable LEDs, 50mm OC with collimating optic ** Based on Flush Lens Aperture. + Rigid Linear tunable white board with 3.3W capable LEDs, 50mm OC with 30° optic (must specify CCT range and E22 Tunable White) ++ Rigid Linear RGBW color tunable board with 5W capable LEDs, 50mm OC with 30° optic (must specify with DMX driver option) 🟢🟤CA Title 24 Compliant to JA8	27 2700K 30 3000K 35 3500K 40 4000K **Tunable** 1840 1800-4000K Tunable White 2765 2700-6500K Tunable White RGBW 1200-8000K Dynamic Color Changing	SY1 0-10 1.0%, UNV (120-277V) linear SY2 0-10 1.0%, UNV (120-277V) log E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear **Lutron** LD Digital Ecosystem* 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1 **EldoLED** E22 0-10* 0.1%, UNV (120-277V) log 2 Channel for Tunable White **Tunable** RGBW-DMX DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller	W White Paint B Black Paint PXX Specialty Paint Color* C Custom/RAL#* *See Finish Guide Note: Flanged Trim can have alternative finish - contact factory if desired FINISH GUIDE LINK	**Aperture Lens** 79A Veiling Acrylic 91A Solite	ST Shower Trim LC Lens Clip IS9X Inside 90° Corner* OS9X Outside 90° Corner* BABA BABA Products CA Casambi Wireless BLE to be paired with driver **Controls** LR Lutron Wireless RF PowPak ATH Lutron Athena Wireless Node *Must be used with E2 driver* *X=specify number of corners

© 2026 Specialty Lighting Industries


Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Ceiling Cutouts and Dimensions

To achieve best results, Specialty recommends to mount the fixture as close to the wall as possible. All drawings show closest possible mounting condition. Ceiling blocking is required and shown with a "X" in a box as a reference. Blocking will vary based on construction conditions and should be detailed on submittal drawings to define construction method and final wall offsets.


GZ2L- Surface Mount Flush Lens

(GZ2L-S-FL-)

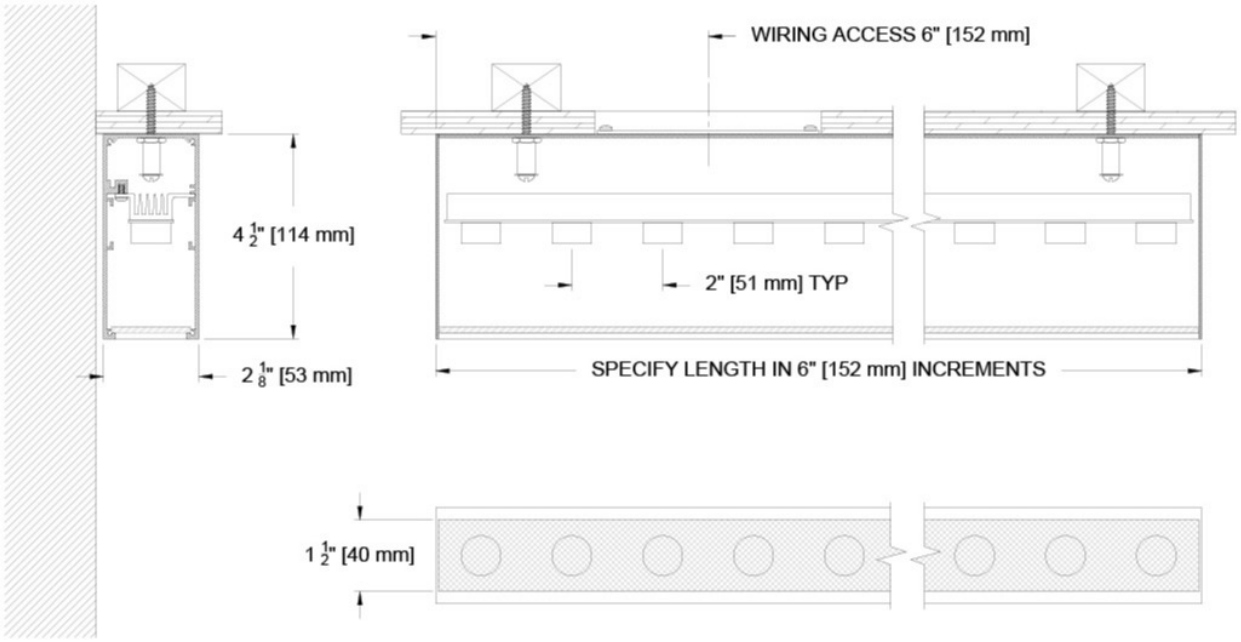

GZ2L- Surface Mount Regressed Lens

(GZ2L-S-RL-)

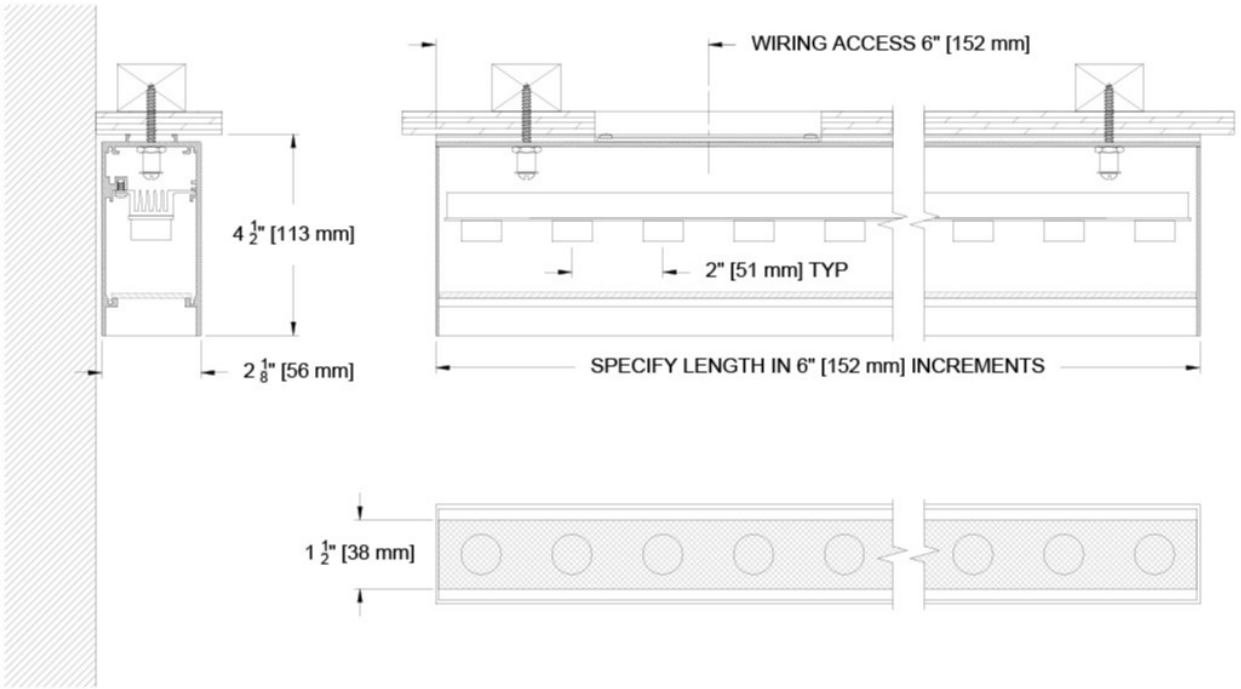


© 2026 Specialty Lighting Industries

These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted.

SNL8 / SNL11

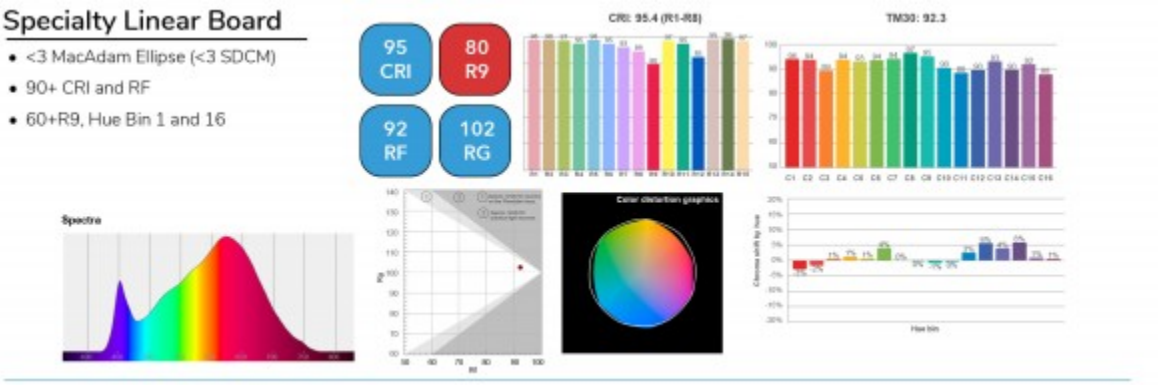

© 2026 Specialty Lighting Industries
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971