


## The Mosaic Family

The INK Mosaic Accent Heads are next generation and are solely designed to work with the Mosaic pocket housing. They are the latest addition to the Mosaic Family of linear configurable concealed track pockets and accent lights, featuring Bluetooth controlled variable color tuning and dynamic beam shaping optics designed specifically for the lighting professional. The fixtures are magnetically mounted in the pocket behind the knife edge and are powered by a proprietary 48 volt power supply/driver following DALI-2 protocol. These accent lights can be located anywhere within the pocket and are a powerful new tool in the Mosaic family. They feature an articulating arm with three pivot points precisely locating the accent lights where needed for focusing. The head can pan and tilt from a single pivot point located at the head, making aiming quick and simple.

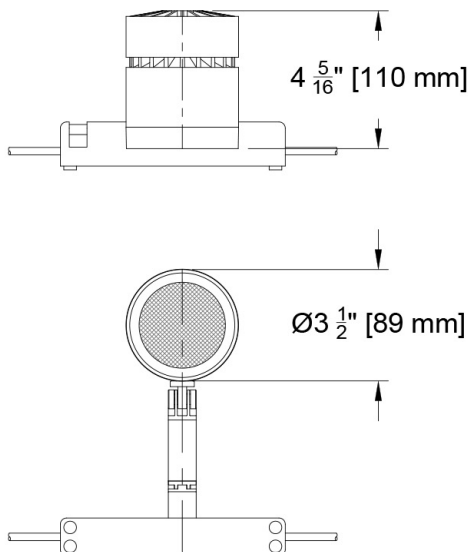

PROJECT:

TYPE:

SPECIFIER:

DATE:

### Key Points (INKMSC-H-L)

#### Housing

- Accent Head for use in Mosaic 6" Pocket.
- Die-cast aluminum housing with twist off bezel assembly for access to accessories.
- Available in Black or White painted finish.
- Adjustable 360° degree rotation and 180° degree pan and tilt on a cantilevered arm with 5 points of rotational adjustment. Aiming hardware is lockable.
- Flexible mounting with magnetic base secured to knife edge internal tray.

#### Source / Optics

- 20 watt tunable white sources available in 1800-4000K CCT and 2700-6500K CCT ranges.
- 17 watt dynamic RGBW source available. Consult factory.
- Up to 1490 delivered lumens in tunable white.
- Bluetooth controlled dynamic beam shaping with versatile beamspread range of 10° to 50°.
- <3 MacAdams Ellipses (<3 SDCM) for tunable white.
- 94+ CRI, 76+ R9 accross all CCT's in tunable white.
- **TITLE 24** Fixture supports CA Title 24 compliance meeting JA8 requirements
- Lifetime: L87B3>55,000 hours at 40°C Ambient

#### Driver And Control

- 120 volt input for 48 volt power supplies featuring easy plug and play connections.
- Driver and Bluetooth interface integral to magnetic base.
- DALI-2 protocol and Bluetooth interface enables individual control of each fixture.

Ordering Codes

PROJECT:

SPECIFIER:

DATE:


TYPE:

QUANTITY:

Ordering Code Example: INKMSC-H-L-

| FIXTURE                        | MOUNTING                    | SOURCE / WATTS                                                                                                                                                                                                                                     | CCT                                                                                                                                                                                            | BEAM                                                                                    | DRIVER / CONTROL                                                                                                                                                                                                                                                                | HEAD FINISH                                                                                                        | LENS ACCESSORIES                  | ACCESSORIES                                                                                                                                             |
|--------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| INKMSC-H-L                     |                             |                                                                                                                                                                                                                                                    |                                                                                                                                                                                                |                                                                                         |                                                                                                                                                                                                                                                                                 |                                                                                                                    |                                   |                                                                                                                                                         |
| INK Mosaic Accent Head - Large | MM<br>Mosaic Magnetic Mount | <div>Ink™</div> <div>Tunable White<br/>90+CRI, 70+R9<br/>1800-400K or 2700-6500K^</div> <div>RGBW<br/>17W<br/>650Lm^<br/>90+CRI, 60+R9<br/>Dynamic Color Changing</div> <div>* Based on 20° Beam &amp; 2765 CCT</div> <div>^ Consult factory</div> | <div>Ink™</div> <div>1840<br/>1800-4000K<br/>Tunable White</div> <div>2765<br/>2700-6500K<br/>Tunable White</div> <div>Tunable</div> <div>RGBW<br/>1200-8000K<br/>Dynamic Color Changing</div> | <div>Ink™</div> <div>10-50<br/>INK Dynamic Beam<br/>Shaping Range 10 - 50 degrees</div> | <div>Ink™</div> <div>INKCA<br/>0.1%, (120-277V) DALI-2 based, Casambi controlled driver/48 volt power supply - consult factory for wattages</div> <div>Note: Power supplies can control multiple fixtures. DALI-2 allows individual control of fixtures. Consult factory.</div> | <div>B<br/>Black Paint</div> <div>W<br/>White</div> <div>Note: Aperture Trim Bezel is black in all finishes.</div> | MSC4-XB<br>4" Mosaic Cross Baffle | <div>BABA</div> <div></div> <div><a href="#">BABA Products</a></div> |

# Mounting Options

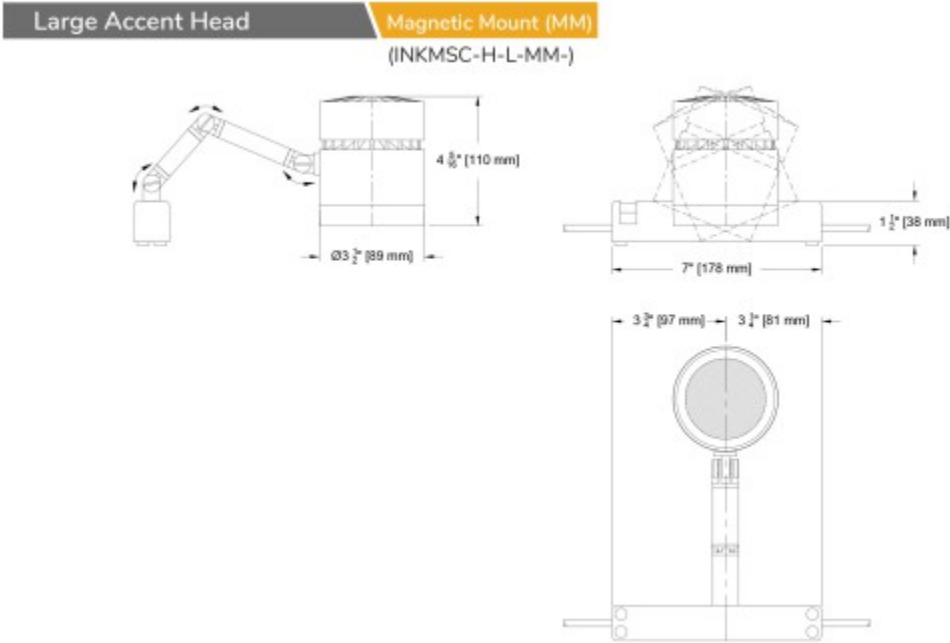

Photometric Table

Photometric data available upon request. Consult factory. All data below are delivered lumens based on goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated nominal flux.

|                      |                  | 10°                                                  |              |         |           | 30°                   |              |         |           | 50°                   |              |         |           |
|----------------------|------------------|------------------------------------------------------|--------------|---------|-----------|-----------------------|--------------|---------|-----------|-----------------------|--------------|---------|-----------|
| Source               | System watts (W) | Delivered Lumens (lm)                                | Lumens/ Watt | Peak CD | 10% Field | Delivered Lumens (lm) | Lumens/ Watt | Peak CD | 10% Field | Delivered Lumens (lm) | Lumens/ Watt | Peak CD | 10% Field |
| Tunable White- 1840  | 21               | Consult Factory for Photometric Data<br>732-517-0800 |              |         |           |                       |              |         |           |                       |              |         |           |
| Tunable White - 2765 | 21               |                                                      |              |         |           |                       |              |         |           |                       |              |         |           |
| Dynamic RGBW         | 18               |                                                      |              |         |           |                       |              |         |           |                       |              |         |           |
|                      |                  |                                                      |              |         |           |                       |              |         |           |                       |              |         |           |

### Color Data

All data below are delivered lumens. Color and flux information based on goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer data range as listed on their datasheet.


### Tunable White Source T20 - CCT 1840 (1800k to 4000k)

- <3 MacAdam Ellipse (<3 SDCM)
- 94 CRI average across all CCTs
- 76 R9 average across all CCTs
- Available in both wired or wireless control


| Color Temp           | TUNABLE WHITE - 1800-4000K |      |      |      |      |      |      |
|----------------------|----------------------------|------|------|------|------|------|------|
|                      | 1800                       | 2200 | 2500 | 2700 | 3000 | 3500 | 4000 |
| System Watts         | 21                         | 21   | 21   | 21   | 21   | 21   | 21   |
| Delivered Lumens     | 1065                       | 1217 | 1315 | 1380 | 1515 | 1604 | 1604 |
| Luminaire Efficiency | 51                         | 58   | 63   | 66   | 72   | 76   | 76   |

Flux and Color data based on 20° measurement at 2700k. All other values are extrapolated from actual and analytical tests


Spectral Power Distributions at all listed CCTs available upon request

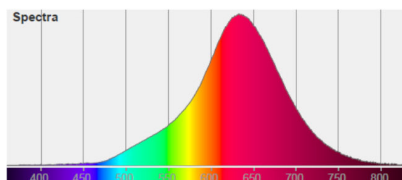


1800K

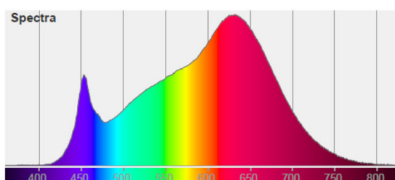

3000K

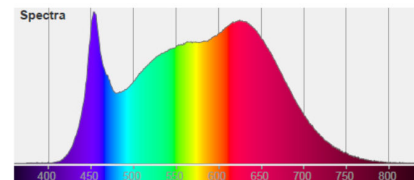

4000K

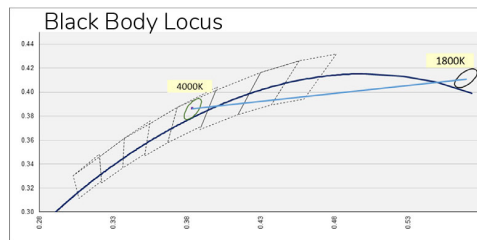


### Tunable White Source T20 - CCT 2765 (2700k to 6500k)

- <3 MacAdam Ellipse (<3 SDCM)
- 94 CRI average across all CCTs
- 96 R9 average across all CCTs
- Available in both wired or wireless control


| Color Temp           | TUNABLE WHITE - 2700-6500K |      |      |      |      |      |      |      |      |
|----------------------|----------------------------|------|------|------|------|------|------|------|------|
|                      | 2700                       | 3000 | 3500 | 4000 | 4500 | 5000 | 5500 | 6000 | 6500 |
| System Watts         | 21                         | 21   | 21   | 21   | 21   | 21   | 21   | 21   | 21   |
| Delivered Lumens     | 1401                       | 1444 | 1490 | 1492 | 1490 | 1488 | 1486 | 1481 | 1499 |
| Luminaire Efficiency | 67                         | 69   | 71   | 71   | 71   | 71   | 71   | 71   | 71   |

Flux and Color data based on 20° measurement at 4500k. All other values are extrapolated from actual and analytical tests


Spectral Power Distributions at all listed CCTs available upon request

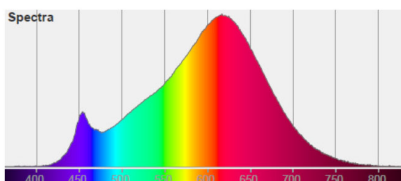

2700K

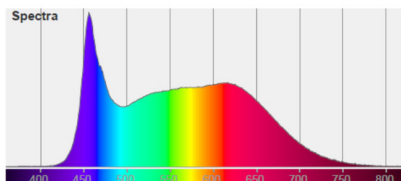

5000K

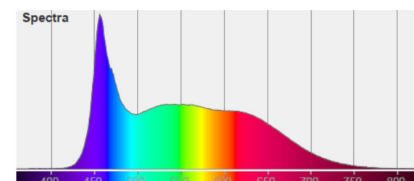

6500K

