




The Jazz Family

Within the Jazz Family, the Tenor5 is the same genre of fixtures you knew as the 1005. The architectural nature of this pocket accent lighting system, available in a flangeless option, presents a clean, unobtrusive integration of multiple sources in an honest, organized fashion that works in a variety of ceilings. The pockets are available in one, two or three headed rectangular apertures or greater multiples in the continuous linear version.

4.5"- 3 Head (Flangeless)

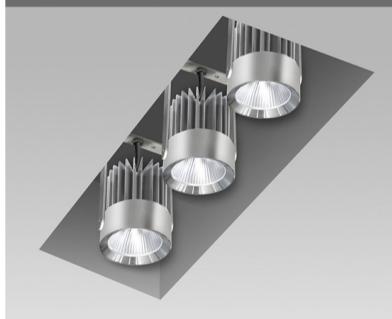

4.5"- 3 Head (Flanged)

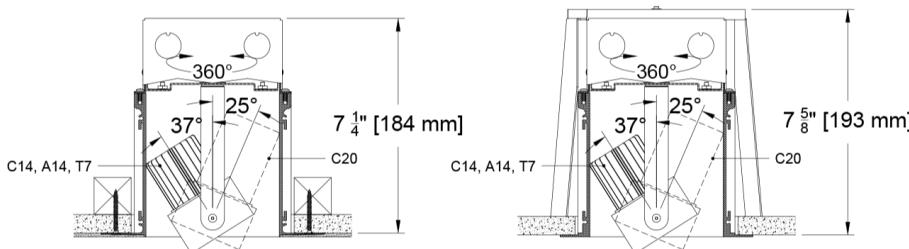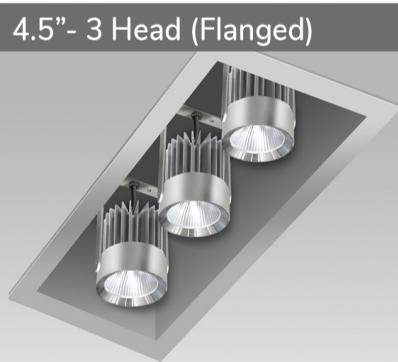

Note: Due to deeper heat sink, the C20 source is limited to 25° tilt in some orientations



Standard Yoke



Pull Down Yoke (Select PY in Accessories)

Aperture Options



1 Head Flangeless (4.5"x4.5")



1 Head Flanged (4.5"x4.5")



2 Head Flangeless (4.5"x9")



2 Head Flanged (4.5"x9")

Beamspreads		15°					20°					36°					60°				
Source		System watts (W)	Delivered Lumens (lm)	Lumens/Watt	Peak cd	10% Field	Delivered Lumens (lm)	Lumens/Watt	Peak cd	10% Field	Delivered Lumens (lm)	Lumens/Watt	Peak cd	10% Field	Deliv. Lumens (lm)	Lumens/Watt	Peak cd	10% Field			
SINGLE HEAD	Citizen C14	14	1073	77	5515	39°	1104	79	3832	49°	1082	78	1761	76°	Consult factory for photometry						
	Citizen C20	21	1467	71	7627	39°	1525	74	5311	49°	1502	73	2418	76°							
	Ambient Dim A14	15	750	50	4868	34°	752	50	2910	45°	758	50	1272	74°							
	Tunable White 1840	10	443	43	2469	33°	456	45	2008	41°	470	46	802	77°							
	Tunable White 2765	10	573	58	3221	33°	588	59	2547	41°	581	59	965	78°							

All measurements are delivered lumens based on 3000K unless otherwise noted below. See full Photometric Table below. Ambient dim measured at full output. Tunable White measurements at mid-point of CCT range (2700K for 1840 and 4500K for 2765 source). Data is based upon a single head aimed at 0°. Multiple heads will deliver more light and will need to be accounted for individually in calculations.

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:


QUANTITY:

Ordering Code Example: JZT5-4-2-AF-C20-30-36-E1-2C-P16-A01-91L-97L

Ceiling Cutouts and Dimensions


4.5"- 1 Head Flangeless Housing Plaster Airtight / IC (AP)

(JZT5-4-1-AP-)

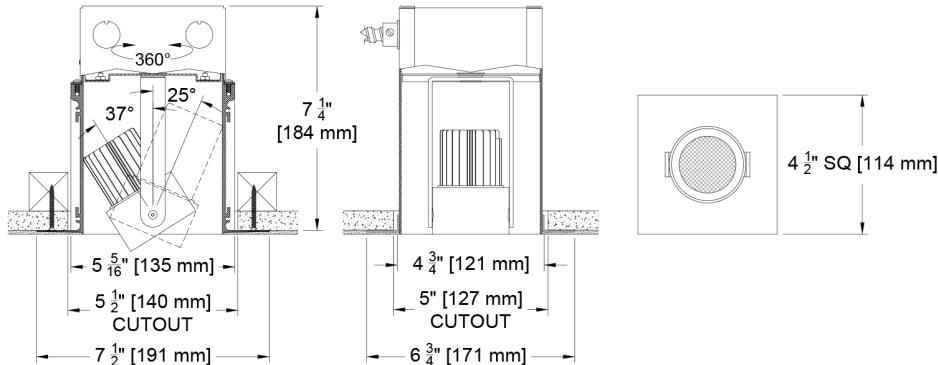


4.5"- 2 Head Flangeless Housing Plaster Airtight / IC (AP)

(JZT5-4-2-AP-)

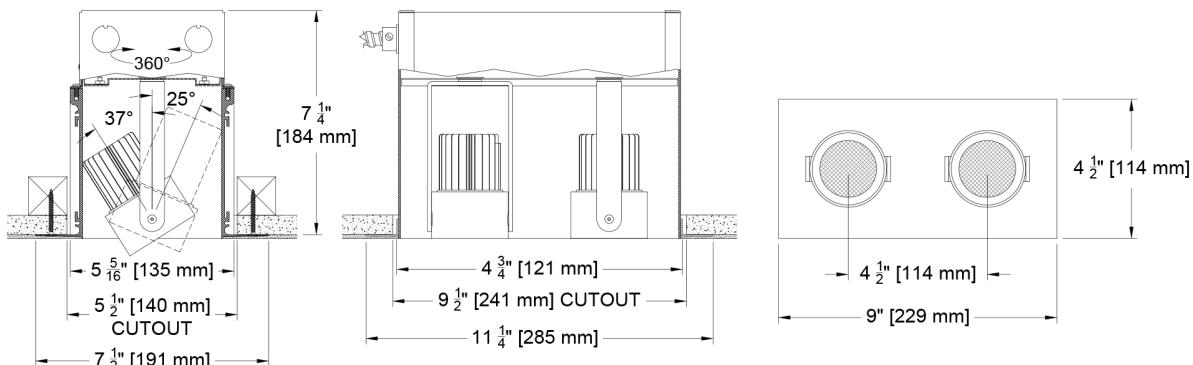

4.5"- 3 Head Flangeless Housing Plaster Airtight / IC (AP)

(JZT5-4-3-AP-)

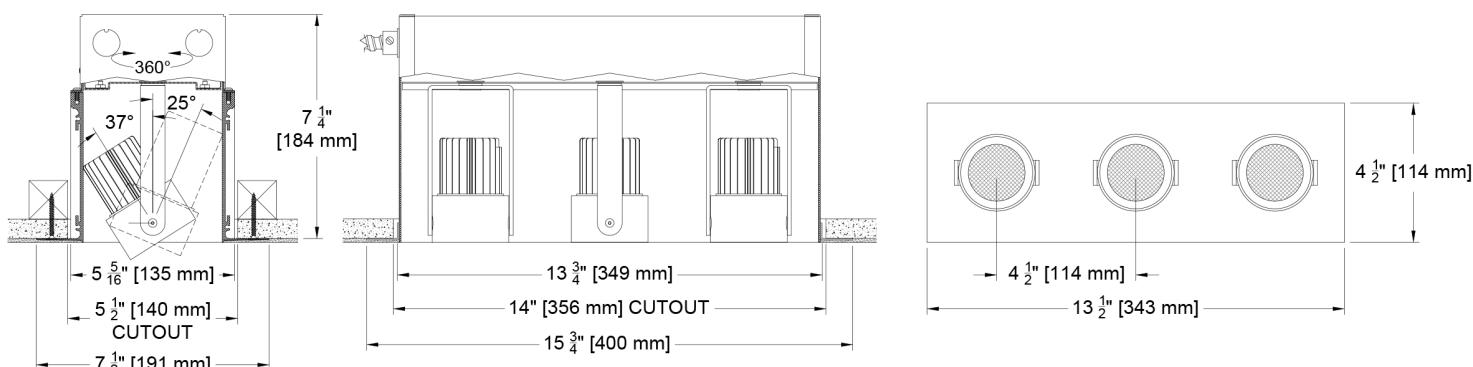


Ceiling Cutouts and Dimensions

4.5"- 1 Head Flange Housing

(JZT5-4-1-AF)

Flanged Airtight / IC (AF)

Note: For ceilings greater than 1"
consult factory for an alternate
mounting bracket.

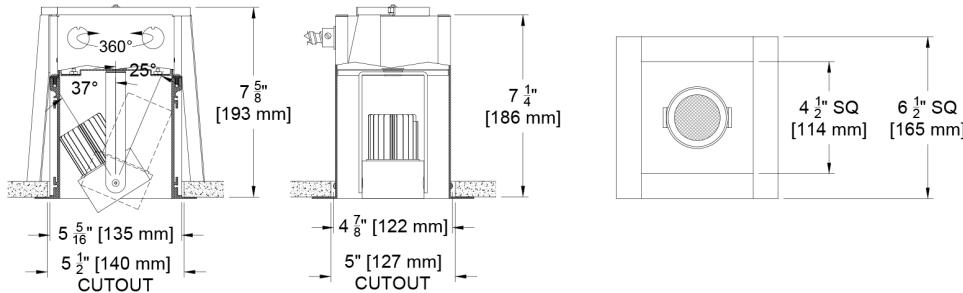


4.5"- 2 Head Flange Housing

(JZT5-4-2-AF)

Flanged Airtight / IC (AF)

Note: For ceilings greater than 1"
consult factory for an alternate
mounting bracket.

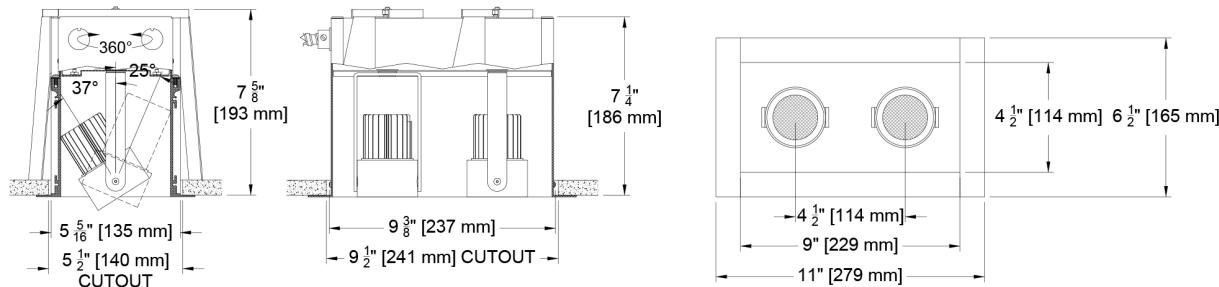


4.5"- 3 Head Flange Housing

(JZT5-4-3-AF-)

Flanged Airtight / IC (AF)


Note: For ceilings greater than 1"
consult factory for an alternate
mounting bracket.

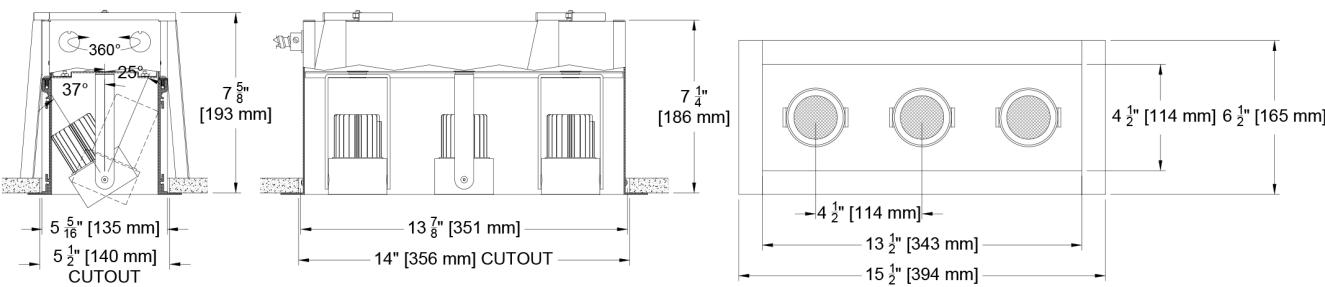

Ceiling Cutouts and Dimensions


4.5"- 1 Head Flangeless Housing \ Universal Airtight / U / AU

(JZT5-4-1-AF)

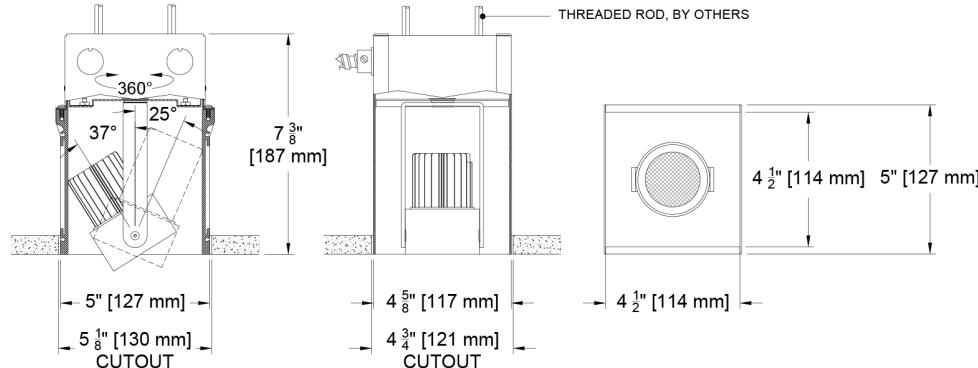


4.5"- 2 Head Flangeless Housing \ Universal Airtight / U / AU

(JZT5-4-2-AF)

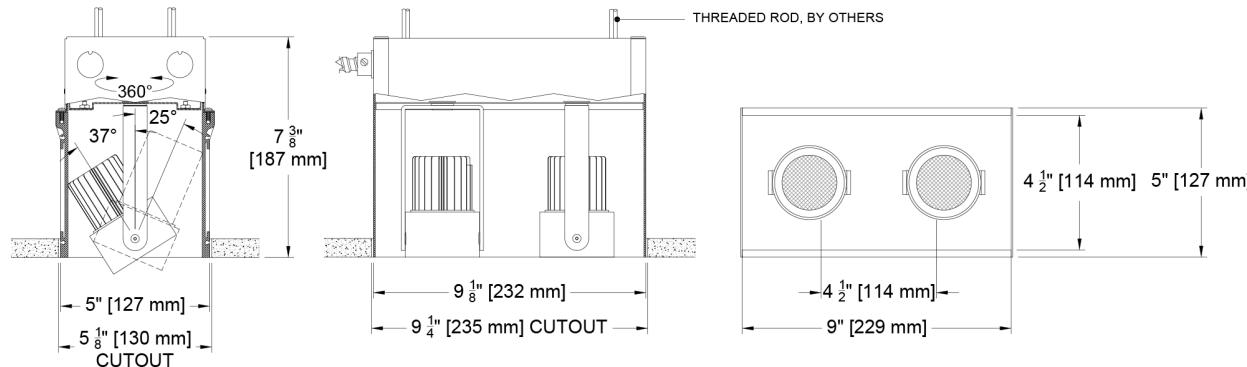

4.5"- 3 Head Flangeless Housing \ Universal Airtight / U / AU


(JZT5-4-3-AF-)

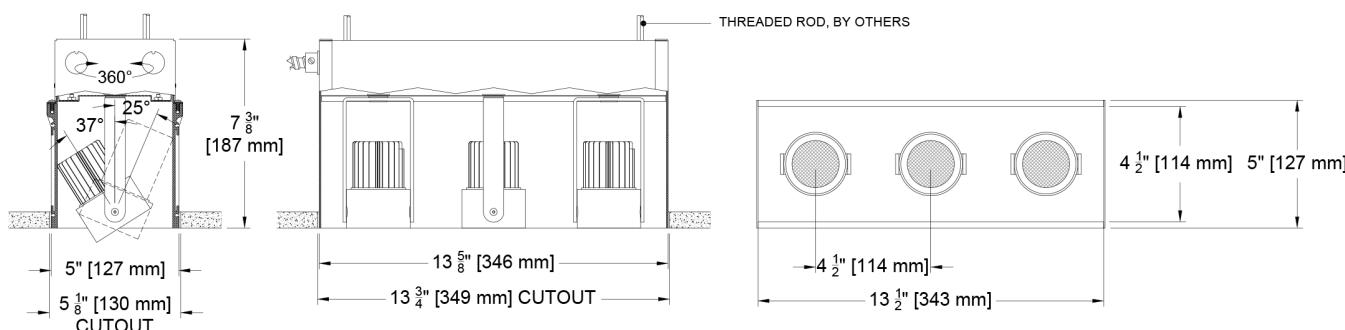


Configurations

Standard Yoke/Pull Down Yoke

Standard Yoke  C14, A14, C20 AND T7 SOURCES

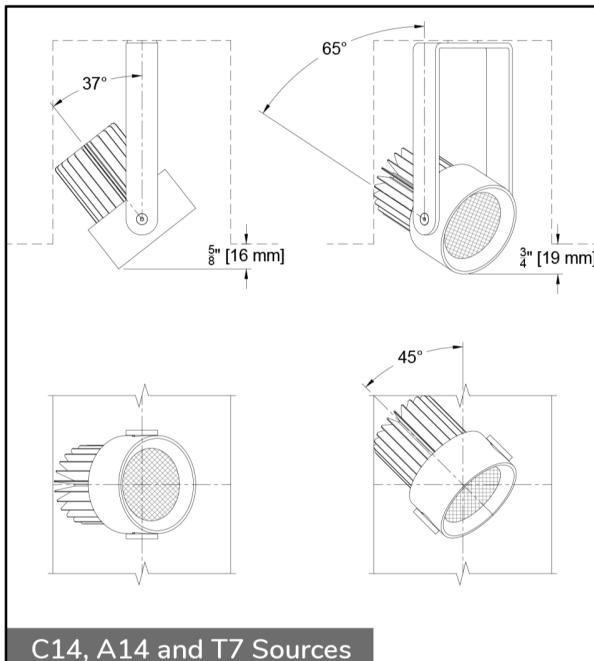


C14, A14 and T7 Sources

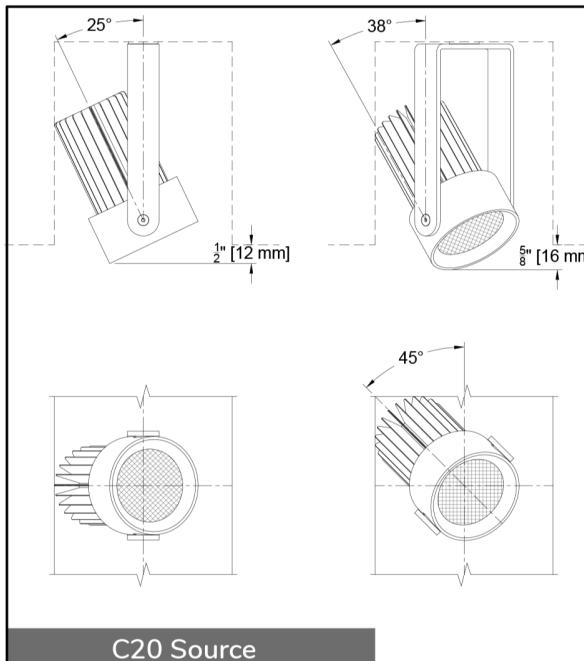




C20 Source

Pull Down Yoke - Full Adjustability  C14, A14 AND T7 SOURCES (See Accessories and select PY)

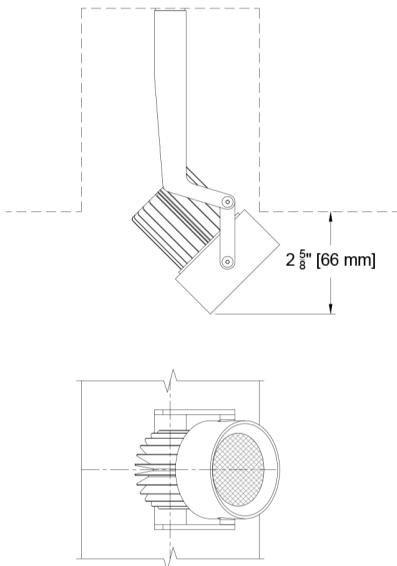

Photometric Table


All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated flux range. All measurements are delivered lumens based on 3000K unless otherwise noted below. Data is based upon a single head aimed at 0°. Multiple heads will deliver more light. Ambient dim measured at full output. Tunable White measurements at mid-point of CCT range (2700k for 1840 and 4500k for 2765 source). ISO cd Plots based upon C20 Source.

Beamspreads		15°					20°					36°					60°				
Source		System watts (W)	Delivered Lumens (lm)	Lumens/Watt	Peak cd	10% Field	Delivered Lumens (lm)	Lumens/Watt	Peak cd	10% Field	Delivered Lumens (lm)	Lumens/Watt	Peak cd	10% Field	Deliv. Lumens (lm)	Lumens/Watt	Peak cd	10% Field			
SINGLE HEAD	Citizen C14	14	1073	77	5515	39°	1104	79	3832	49°	1082	78	1761	76°	Consult factory for photometry						
	Citizen C20	21	1467	71	7627	39°	1525	74	5311	49°	1502	73	2418	76°							
	Ambient Dim A14	15	750	50	4868	34°	752	50	2910	45°	758	50	1272	74°							
	Tunable White 1840	10	443	43	2469	33°	456	45	2008	41°	470	46	802	77°							
	Tunable White 2765	10	573	58	3221	33°	588	59	2547	41°	581	59	965	78°							
CCT Multiplier																					
CCT	Citizen																				
2700	0.95																				
3000	1.00																				
3500	1.02																				
4000	1.03																				
All measurements are delivered lumens based on 3000K unless otherwise noted below. Ambient dim measured at full output. Tunable White measurements at mid-point of CCT range (2700k for 1840 and 4500k for 2765 source). ISO cd Plots based upon C20 Source. Refer to photometry tab on product page for exact ICO cd plot and IES files. Data is based upon a single head aimed at 0°. Multiple heads will deliver more light and will need to be accounted for individually in calculations. The following combinations do not meet CA Title 24 JAB requirements: Tunable White (1840)-15°.		 <p>14.6°</p>					 <p>21°</p>					 <p>37°</p>									

Color Data

Citizen Source C14, C20

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

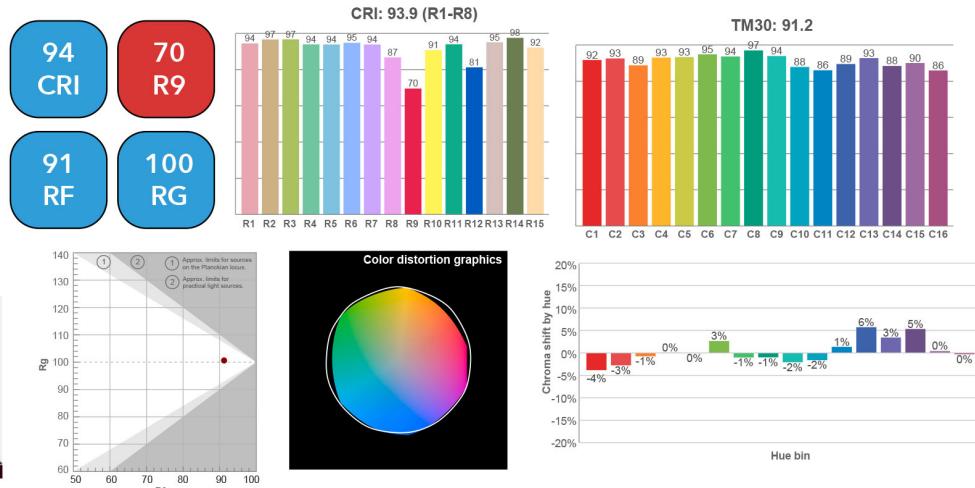

Ambient Dim Source A14 (AD - 3000k to 1900k)

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

