

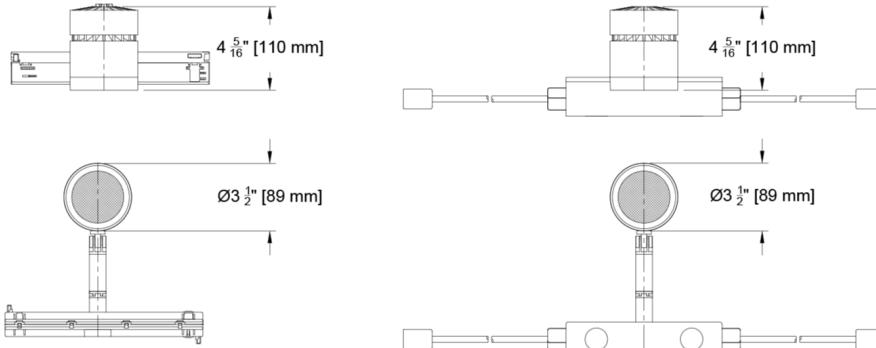
## The Mosaic Family

Welcome to the Mosaic Family of linear configurable concealed track pockets and accent lights. The Mosaic Accent Heads can be track mounted or magnetically mounted in the pocket behind the knife edge. These accent lights can be located anywhere within the pocket and are the true workhorse of the family. They feature an articulating arm with three pivot points precisely locating the accent lights where needed for focusing. The head can pan and tilt from a single pivot point located at the head, making aiming simple and quick. It is currently available in two sizes, large and medium. You have found the Large Mosaic Accent Head, for installation in the Mosaic 6" aperture pocket. We hope that you enjoy the details.

Large Accent Head-Track Mt



Large Head-Magnetic Mt



PROJECT:

TYPE:

SPECIFIER:

DATE:

### Key Points (MSC-H-L)

#### Housing

- Accent Head for use in Mosaic 6" Pocket
- Die-cast aluminum housing with twist off bezel assembly for access to accessories and optics.
- Available in Black or White painted finish
- Adjustable 360° degree rotation and 180° degree pan and tilt on a cantilevered arm with 5 points of rotational adjustment. Aiming hardware is lockable.
- Track mounted or magnetic base mounted to knife edge internal tray

#### Source / Optics

- 3 beam spreads - 18°, 28° and 35°
- Up to 3513 delivered lumens
- <2 MacAdams Ellipses (<2 SDCM) for fixed white
- 90+ CRI, 60+ R9 Standard, 95+ CRI, 90+ R9 available with Ambient Dim option
- CCT available in 2700, 3000, 3500, 4000K
- **TITLE 24** Fixture supports CA Title 24 compliance meeting JA8 requirements
- Lifetime: L87B3>55,000 hours at 40°C Ambient

#### Driver And Control

- 120 volt
- Integral driver located in track adapter or magnetic base
- 0-10 volt or DALI. DALI control enables individual control of each fixture.
- For track mount heads, 0-10 volt dimming control provides single zone of dimming control on 120 volt (2 or 3 circuit track). Refer to MSC-T cutsheets for details on voltage and circuiting.

Round Beamspreads		18°				28°				35°			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lumens/Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lumens/Watt	Peak CD	10% Field
Citizen C17	20	1928	96	11737	39°	1989	99	7118	57°	1975	99	4982	63°
Citizen C24	29	2646	93	16324	39°	2757	97	9845	57°	2719	95	6875	63°
Citizen C32	38	3380	90	20933	39°	3513	93	12636	57°	3490	93	8847	63°

ISO cd Plots based upon C32 Source. Refer to photometry tab on product page for exact ICO cd plot and IES files.

# Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: MSC-H-L-TM-C24-30-28-TD1-B-91L

Fixture	Mounting	Source / Watts	CCT	Beam	Driver / Control	Head Finish	Lens Accessories
MSC-H-L							
Mosaic Accent Head - Large	TM Mosaic Track Mount  MM Mosaic Magnetic Mount	Citizen C17   20W 1989Lm* 90+CRI, 60+R9  C24   29W 2757Lm* 90+CRI, 60+R9  C32   38W 3513Lm* 90+CRI, 60+R9    CA Title 24 Compliant	27 2700K  30 3000K  35 3500K  40 4000K	18 Spot  28 Narrow Flood  35 Flood	TD1 0-10V 2.0%, (120-277V) linear  TD2 DALI-2 1.0%, (120-277V) linear	B Black Paint    W White  	Reflector (lamp Media)  91L Solite  97L Black Hexcel Louver  XXL Other reflector (lamp media)*

Note: Aperture Trim  
Bezel is black in all  
finishes.

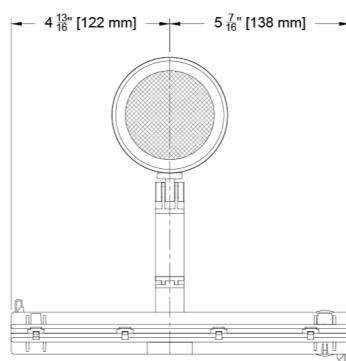
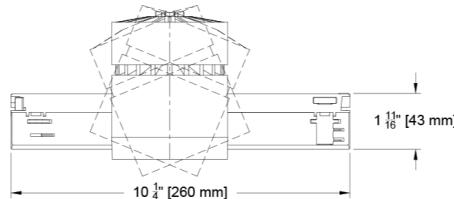
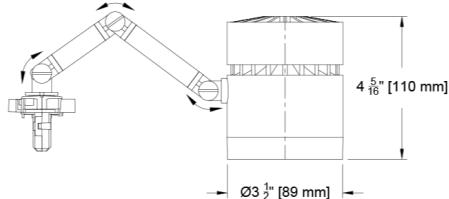


## Mounting Options

### Large Accent Head

### Track Mount (TM)



(MSC-H-L-TM-)



### Large Accent Head

### Magnetic Mount (MM)

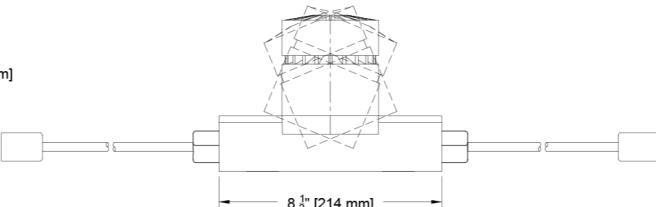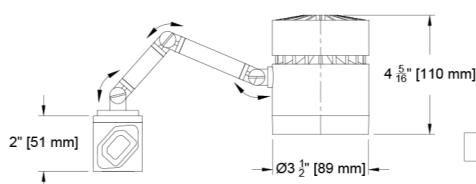
(MSC-H-L-MM-)



### Magnetic Head Interconnect





















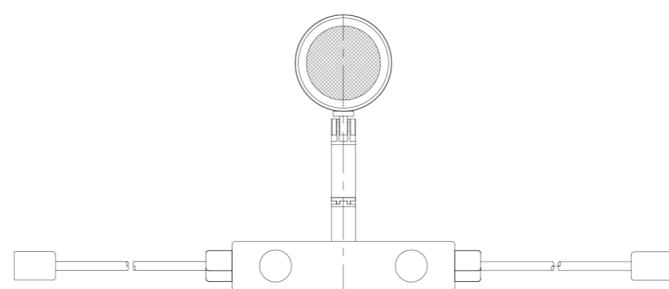\* Standard length 1'



# Photometric Table

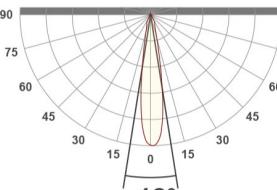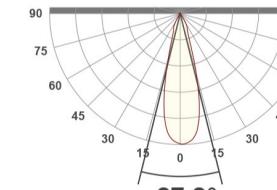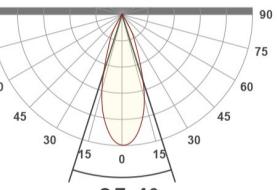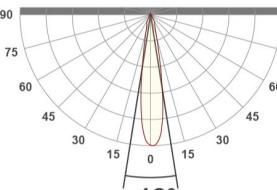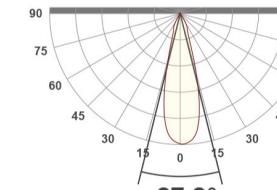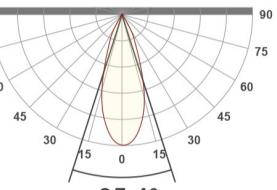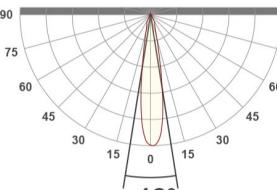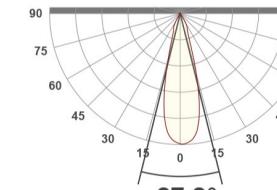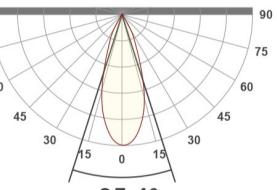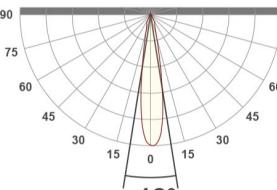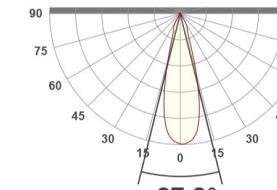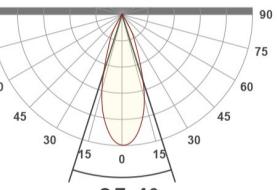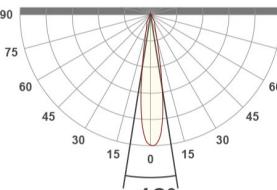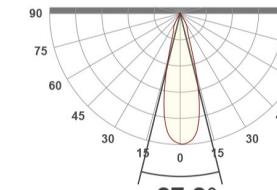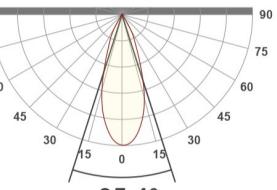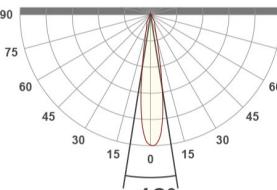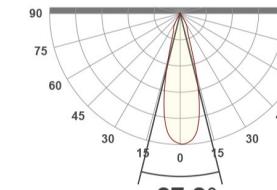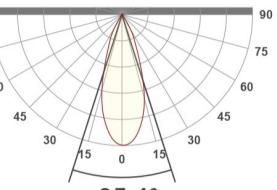All data below are delivered lumens based on goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated nominal flux.

Round Beamspreads		18°				28°				35°			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lumens/Watt	Peak CD	10% Field	Delivered Lumens (lm)	Lumens/Watt	Peak CD	10% Field
Citizen C17	20	1928	96	11737	39°	1989	99	7118	57°	1975	99	4982	63°
Citizen C24	29	2646	93	16324	39°	2757	97	9845	57°	2719	95	6875	63°
Citizen C32	38	3380	90	20933	39°	3513	93	12636	57°	3490	93	8847	63°
CCT Multiplier		Beam angle				Beam angle				Beam angle			
CCT	Citizen												
2700	0.95												
3000	1.00												
3500	1.02												
4000	1.03												
All measurements are delivered lumens based on 3000K unless otherwise noted below.													

ISO cd Plots based upon C32 Source. Refer to photometry tab on product page for exact ICO cd plot and IES files.

## Color Data

### Citizen Source C17, C24, C32

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

