




The Mosaic Family

Welcome to the Mosaic Family of linear configurable concealed track pockets and accent lights. The knife edge aperture integrates within the architectural environment as a clean, minimal incision into the ceiling. The pocket contains many useful lighting tools in the form of Mosaic Family accent lights and wall washers that can be mounted anywhere along the pocket's length, powered by concealed track or remote power supplies. Continuous indirect cove lighting can also be integrated and concealed behind the slot's shallow knife edge. The housing has variety of 90 degree corner and intersecting components for a wide range of configurable layouts.

Mosaic Open Cove



CV - (INDIRECT COVE)

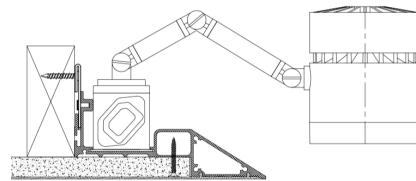

MM - (MAGNETIC HEAD)

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (MSC-OCV) Housing

- Extruded aluminum flangeless knife-edge housing for use in GWB ceilings with fabricated aluminum cavity to contain a variety of lighting options.
- Can be custom configured in terms of lengths and layouts. Our standard offering includes right angle corners.
- Can be finished in any of our painted finishes + custom RAL. Note that Accent Heads are available in White or Black only.

Mosaic Knife Edge Concealed Lighting

- Linear indirect cove lights are furnished and coordinated with run length and configuration shapes.
- For CV configurations remote power supplies will be furnished.

Drivers

- 0-10 volt dimming, DALI-2 available for Magnetic mounted accent heads and linear indirect cove lighting. Refer to MSC-T, MSC-H and MSC-CV cutsheets for details.

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: MSC-OCV-KZ-R-(90X60)-CV-F4-27-SY2-B ~ OR ~ MSC-OCV-KZ-R-(90X60)-MM-K-K-K-B

Fixture	Trim	Length	Configuration	Source / Watts	CCT	Driver / Control	Trim Finish
MSC-OCV	<p>Flangeless Housings</p> <p>KZ Knife-edge Flangeless</p> <p>S-(A") Straight Runs</p> <p>R-(A"xB") Rectangular Runs</p> <p>L-(A"xB") L- Right Angle Runs</p> <p>Note: Refer to Run Length Configurations page for standard run shapes and dimensioning conventions. Provide all key dimensions in inches. Consult factory for other run shapes and configurations.</p>	<p>S-(A") Straight Runs</p> <p>R-(A"xB") Rectangular Runs</p> <p>L-(A"xB") L- Right Angle Runs</p> <p>Note: Refer to Run Length Configurations page for standard run shapes and dimensioning conventions. Provide all key dimensions in inches. Consult factory for other run shapes and configurations.</p>	<p>MM Mosaic Magnetic Mount *</p> <p>CV Mosaic Indirect Cove</p> <p><i>* Note: Accent Head to be ordered separately - See MSC-H</i></p>	<p>F4 5W 703Lm 90+CR, 50+R9 Values per foot</p> <p>F8 10W 1363Lm 90+CR, 50+R9 Values per foot</p> <p>K *</p> <p><i>* Blank ~ For use when MM-Mosaic Magnetic Head under configuration is selected</i></p>	<p>24 2400K</p> <p>27 2700K</p> <p>30 3000K</p> <p>35 3500K</p> <p>40 4000K</p> <p>K *</p> <p><i>* Blank ~ For use when MM-Mosaic Magnetic Head under configuration is selected</i></p>	<p>SY1 0-10 1.0%, UNV (120-277V) linear</p> <p>SY2 0-10 1.0%, UNV (120-277V) log</p> <p>E1 0-10 0.1%, UNV (120-277V) log</p> <p>E2 DALI-2 0.1%, UNV (120-277V) log</p> <p>E3 0-10 0.1%, UNV (120-277V) linear</p> <p>K *</p> <p><i>* Blank ~ For use when MM-Mosaic Magnetic Head under configuration is selected</i></p>	<p>W White Paint</p> <p>B Black Paint</p> <p>PXX Specialty Paint Color*</p> <p>P01-P15</p> <p>C Custom/RAL Color</p>  <p>FINISH GUIDE LINK</p>

Run Length Configurations and Details


S - Straight Runs (A")

(MSC-OCV-S-(A")-)



R - Rectangular Runs (A"XB")

(MSC-OCV-R-(A"XB")-)

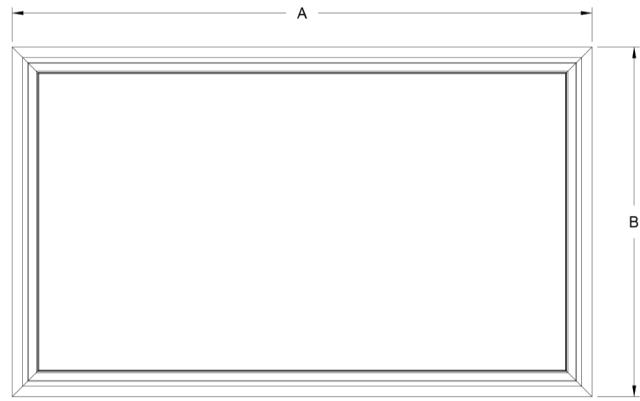

L - Right Angle Runs (A"XB")



(MSC-OCV-L (A"XB")-)



Ceiling Cutouts and Dimensions

Mosaic Open Cove - Indirect Cove

(MSC-OCV-CV-)

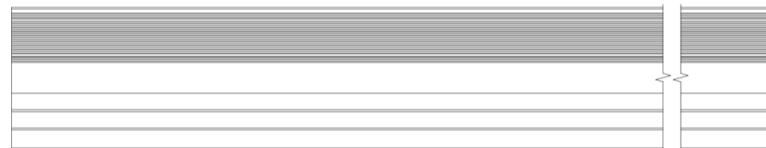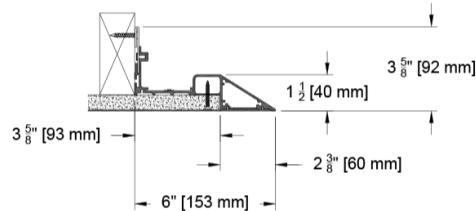

Mosaic Open Cove - Magnetic Accent Head

(MSC-OCV-MM-)

