
# The Mural Family

Welcome to Mural. When true continuous wall washing is a must and point source wall wash on center spacing and offsets are problematic, Mural solves the problem. This 5" (122mm) continuous linear wall wash fixture can be specified to custom lengths. Mural offers a choice of flange or flangeless and is designed for wall heights up to 12 feet (3.5m).

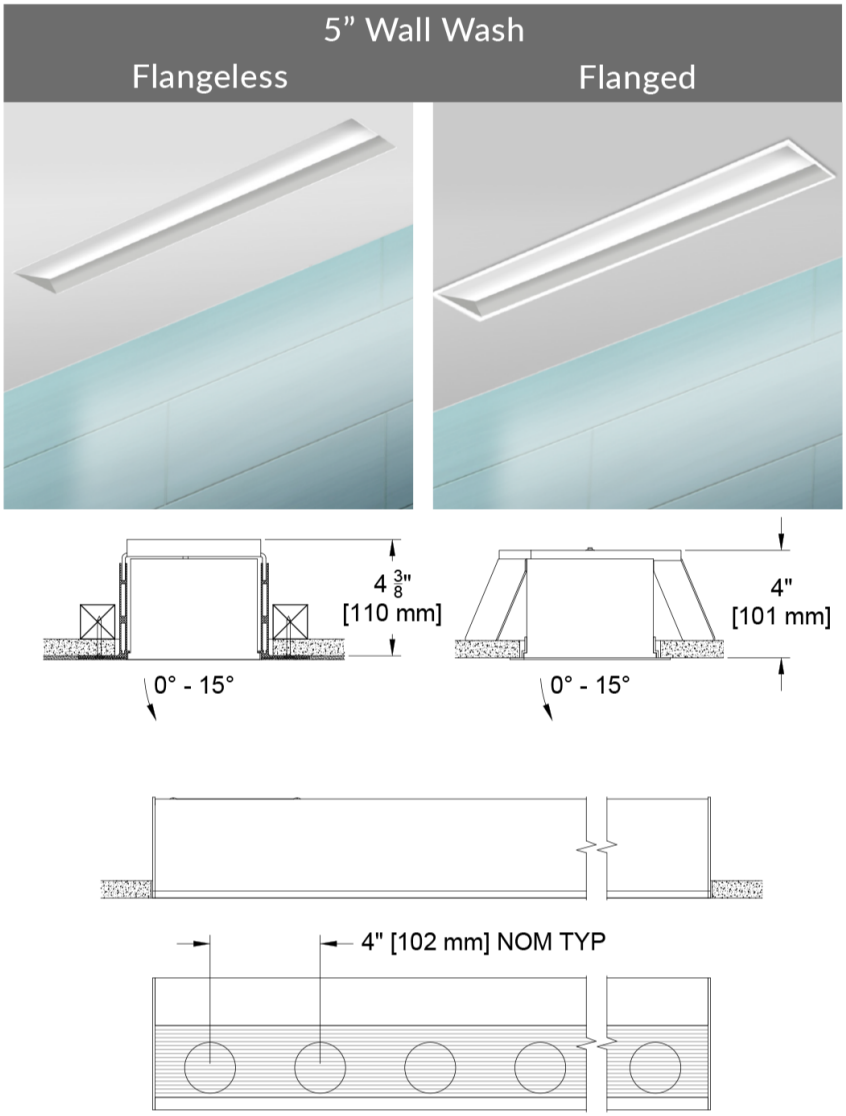


PROJECT: TYPE:

SPECIFIER: DATE:

## Key Points (MU5-RM-ADJ)

### Trim

- Flange or Flangeless
- 15 color options + Custom and RAL# available
- The fixture is designed to be placed a maximum of 24" off the wall.

### Source Optics

- Adjusts to 15°
- Up to 824 lm/ft available
- 95+ CRI and 90+ R9
- 2700K, 3000K, 3500K, 4000K
  AmbientDim™ - 3000K-1900K
- Fixture photometrics compliant to TITLE 24 JA8 requirements

### Housing

- c SP us Damp listed
- IC Airtight housing compliant to TITLE 24 JA8 requirements

### Driver And Control

- TruPhase™ - Dimming down to 0.1% - 120V only
- Universal 120v to 277v
- Flicker Free to IEEE 1789-2015
- 0-10v, DALI, Ecosystem or EldoLED options available.


© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:51 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Ordering Codes

PROJECT: SPECIFIER:

DATE: TYPE: QUANTITY:

*Ordering Code Example: MU5-RM-ADJ-Z-AP-246"-C15-27-SY1-W-W-82A*

| FIXTURE | TRIM | MOUNTING | LENGTH | LUMENS / WATTS | CCT | DRIVER / CONTROL | HOUSING FINISH | TRIM FINISH | LENS ACCESSORIES | ACCESSORIES |
|---|---|---|---|---|---|---|---|---|---|---|
| MU5-RM-ADJ | | | | | | | | | | |
| Mural 5" Adjustable Linear Continuous Wall Wash (122mm) | F<br>Flanged Trim<br><br>Z<br>Flangeless Trim | **Flanged Housings**<br>AF ● ●<br>Flanged Airtight/IC<br>**Flangeless Housings**<br>AP ● ●<br>Airtight Plaster *IC-Rated*<br>APM ● ●<br>Airtight Panel Mount *IC-Rated*<br><br>Note - All housings are airtight by design<br><br>● ● Supports CA Title 24 part 6 compliance meeting JA8 requirements | __<br>Specify exact length in inches | C5 ● ●<br>15W/ft<br>824Lm/ft<br>90+CRI, 60+R9<br>**Ambient Dim™**<br>A5 ● ●<br>115W/ft<br>721Lm/ft<br>90+CRI, 60+R9<br><br>● ● Supports CA Title 24 part 6 compliance meeting JA8 requirements | 27<br>2700K<br><br>30<br>3000K<br><br>35<br>3500K<br><br>40<br>4000K<br>**Ambient Dim™**<br>3019<br>3000-1900K | SY1<br>0-10<br>1.0%, UNV (120-277V)<br>linear<br><br>SY2<br>0-10<br>1.0%, UNV (120-277V)<br>log<br><br>E2<br>DALI-2<br>0.1%, UNV (120-277V)<br>log<br><br>TR2<br>TruPhase™<br>0.1%, (120-120V) log<br>Up to 20W<br>Forward and Reverse compatible Phase Dimming<br>Static White & Ambient Dim only | W<br>White Paint<br><br>PXX<br>Specialty Paint Color<br>*See Finish Guide*<br><br>C<br>Custom/RAL#<br>*See Finish Guide*<br><br>FINISH GUIDE LINK | W<br>White Paint<br><br>PXX<br>Specialty Paint Color<br>*See Finish Guide*<br><br>C<br>Custom/RAL#<br>*See Finish Guide*<br><br>K<br>Blank<br>*For use with Flangeless* | **Aperture Lens**<br>82A<br>Frosted Supertex (Glass Spread Lens)<br><br>LENS ACCESSORY VISUAL GUIDE LINK | LR<br>Lutron Wireless RF PowPak<br><br>EM<br>Emergency Pack<br><br>CP<br>Chicago Plenum<br><br>BABA<br>BABA Products<br><br>IS9X<br>Inside 90° Corner*<br><br>OS9X<br>Outside 90° Corner*<br><br>*X=specify number of corners |


© 2026 Specialty Lighting Industries


NOTE: Last Updated on Wed, Oct 21, 2026 4:51 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Ceiling Cutouts and Dimensions


## Linear Flangeless Housing — Plaster Mount (P)

*(MU5-RM-ADJ-Z-P-)*

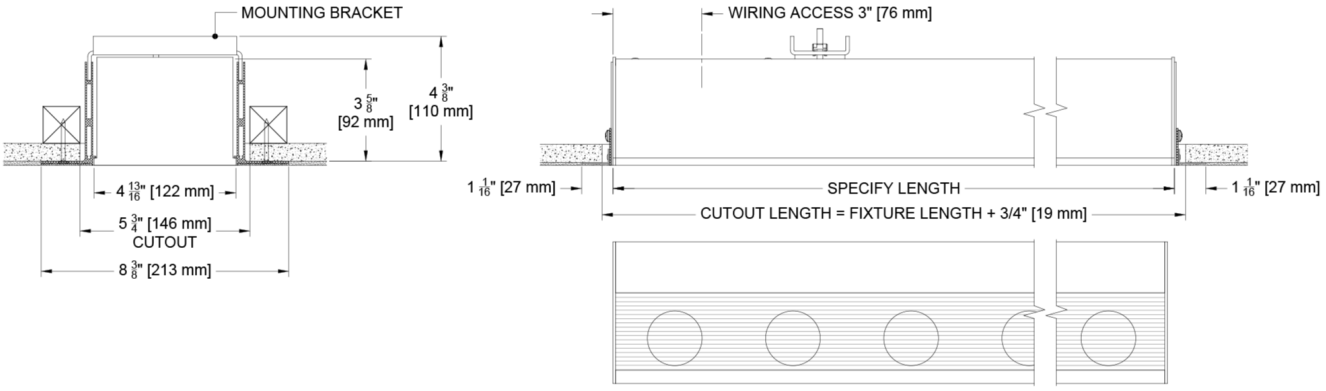



## Linear Flanged Housing — Flanged Mount (F)

*(MU5-RM-ADJ-F-U-)*

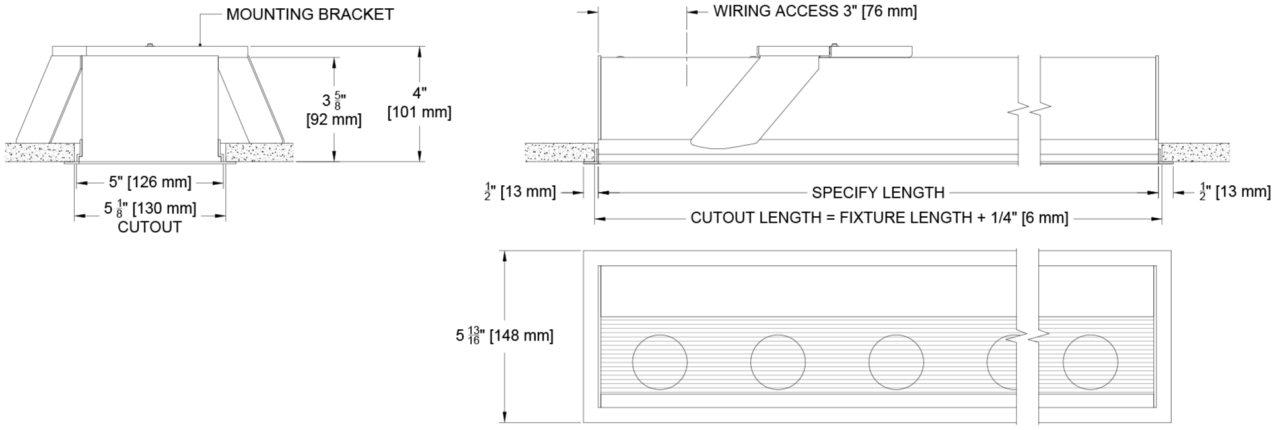


## Linear Flangeless Housing — Panel Mount (PM)

*(MU5-RM-ADJ-Z-PM-)*

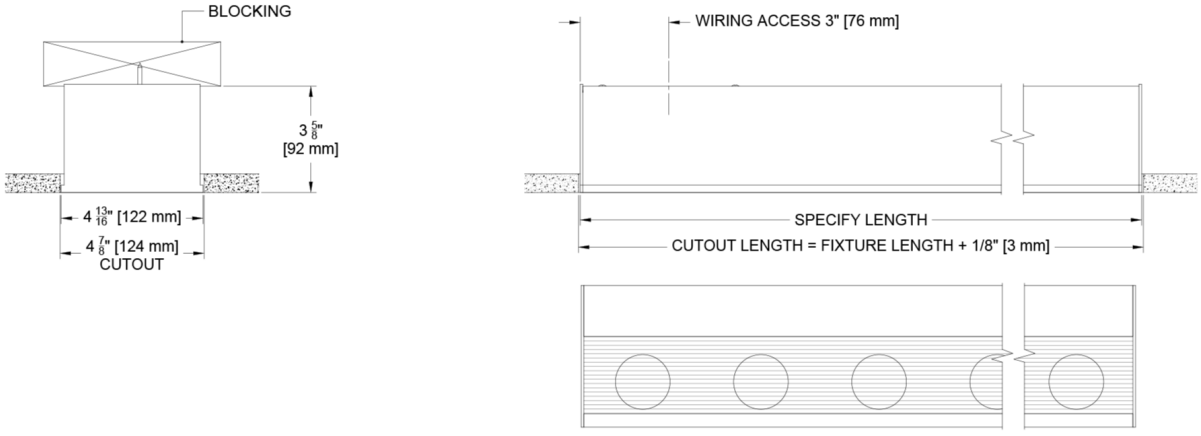



© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:51 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Photometric Table

All data is based from goniometer measurements of production representative product. All lumen values are delivered and can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT. All photometry is used with a veiling acrylic (79A) lens. Other lens selections will modify the lumen output and exact beam spread. If photometry is required with a specific lens treatment contact your regional sales manager for a special measurement.


Photometey Bseed on 3 LAMPS (1 FOOT)

| MURAL - ADJUSTABLE LINEAR WALL WASH (MU5-RM-ADJ) | | | | | |
|---|---|---|---|---|---|
| Source | System watts (W/ft) | Delivered Lumens (lm/ft) | Lumens/ Watt/ft | PeakCD | 10% Field |
| Citizen - C5 | 15 | 824 | 54 | 2096 | 68° |
| Ambient Dim™ - A5 | 15 | 721 | 47 | 1833 | 68° |

C5 Multipliers

| CCT | Citizen |
|---|---|
| 2700 | 0.95 |
| 3000 | 1.00 |
| 3500 | 1.02 |
| 4000 | 1.03 |

All Measurements 3000K and per foot. Double Board kicks additional light towards ceiling plane- see IES file





© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:51 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

# Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted.


## C15 & A15


### C15


- <3 MacAdam Ellipse (<3 SDCM)


97 CRI | 92 R9 | 95 RF | 103 RG


**Spectra**

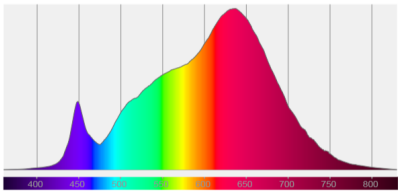






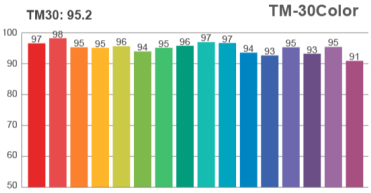








### AmbientDim™ A15

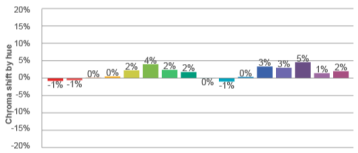
- <3 MacAdam Ellipse (<3 SDCM)


97 CRI | 92 R9 | 95 RF | 103 RG


**Spectra**

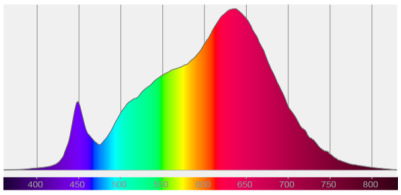






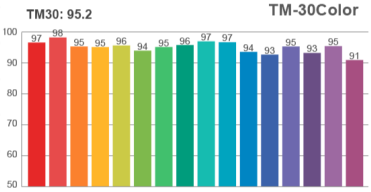








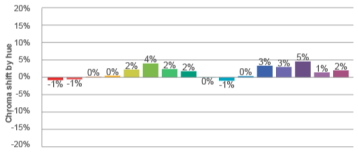

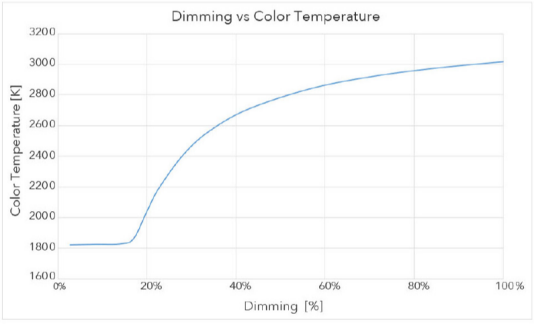
© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:51 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971