



10 - 10w PROJECTOR

30 - 30w PROJECTOR





PROJECT: TYPE:

SPECIFIER: DATE:

Key Points (SCFP)

- Numerous Mounting options
- Finishes: Standard black and white
- Durable die-cast aluminum craftsmanship
- For use with A.A.G Stucchi surface and recessed track
- Accepts accessories (filters, GoBo, etc)

Source/Optics

- 360° horizontal rotation and 90° vertical aiming
- 90+ CRI standard
- 2 Different output options (10W and 30W)
- Beam Range 20° to 35°
- Precise, high definition built-in zoomable and shapeable projection
- IP20 c us

Driver And Control

TruPhase[™], 0-10v, DALI-2, DMX



Ordering Codes


PROJECT: SPECIFIER:

DATE: TYPE: QUANTITY:

Ordering Code Example: SCFP-Z-SMR#BP-30-27-35-TR2-B


FIXTURE	TRIM	MOUNTING	SOURCE / WATTS	ССТ	BEAM	DRIVER / CONTROL	HEAD FINISH
SCFP							
Scope Framing Projector	F Flanged Trim Z Flangeless Trim CP Canopy Plate for Pancake Box	SM Surface Mount *†# SMR Surface Mount ^ \(\Delta \) SMLJB - Surface Mount † Large Junction Box PM Panel Mount *†# PMR Panel Mount ^ \(\Delta \) Shallow Panel Installation SHPM Shallow Panel Mount \(\Delta \) Pancake/ Octagonal J-Box Installation CM \(\Delta \) Canopy Mount Retro-fit Installation SHM \(\Delta \) Shallow Surface Mount # - Bracket Pan available - Add #BP after mounting option † Intergral Driver \(\Delta \) Remote Driver Deep double gang Handy box supplied by others for driver enclosure \(\Delta \) Double gang Handy box supplied by others for fixture mount and low voltage wirring For Track options see \(\Text{YSLH-SCFP} \)	C10 10W 90+CRI, 60+R9 10 Watt C30 30W 90+CRI, 60+R9 30 Watt	27 2700K 30 3000K 35 3500K 40 4000K	20-35 Range	C1 0-10 1.0%, UNV (120-277V) linear C2 ELV/Triac 1.0%, (120V) linear E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear E4^ DMX 0.1%, UNV (120-277V) linear E4A' DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX ^INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY 0.1%, (100-277V) Up to 20W Forward and Reverse compatible Phase Dimming 2 Dimming Curves: Linear/Logarithmic Static White & Ambient Dim only	W White Paint B Black Paint



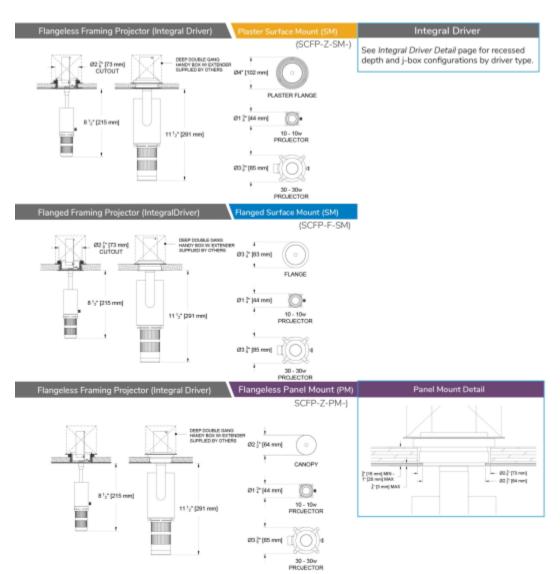


^{*} Deep double gang handy box supplied by others for driver enclosure



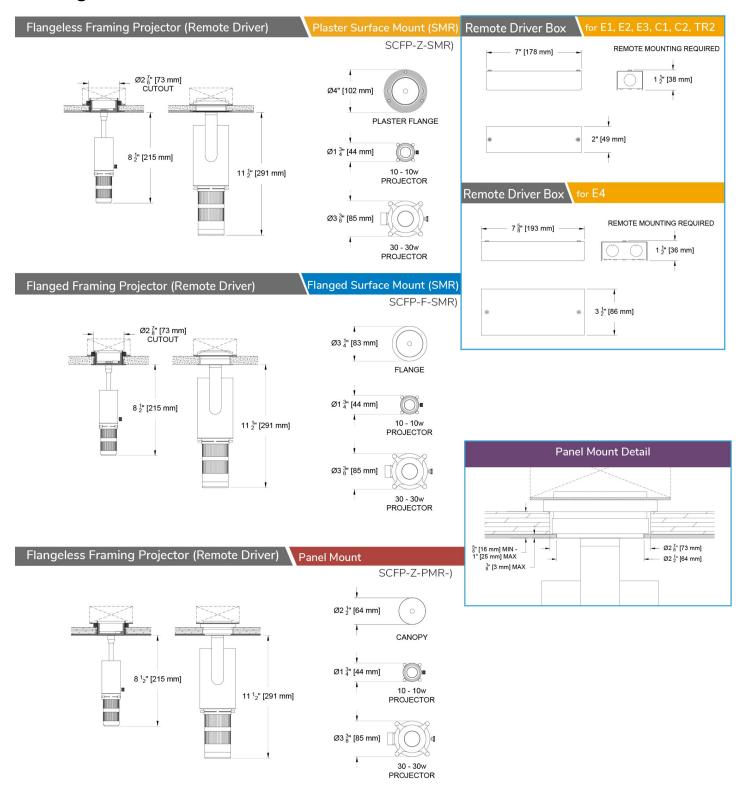



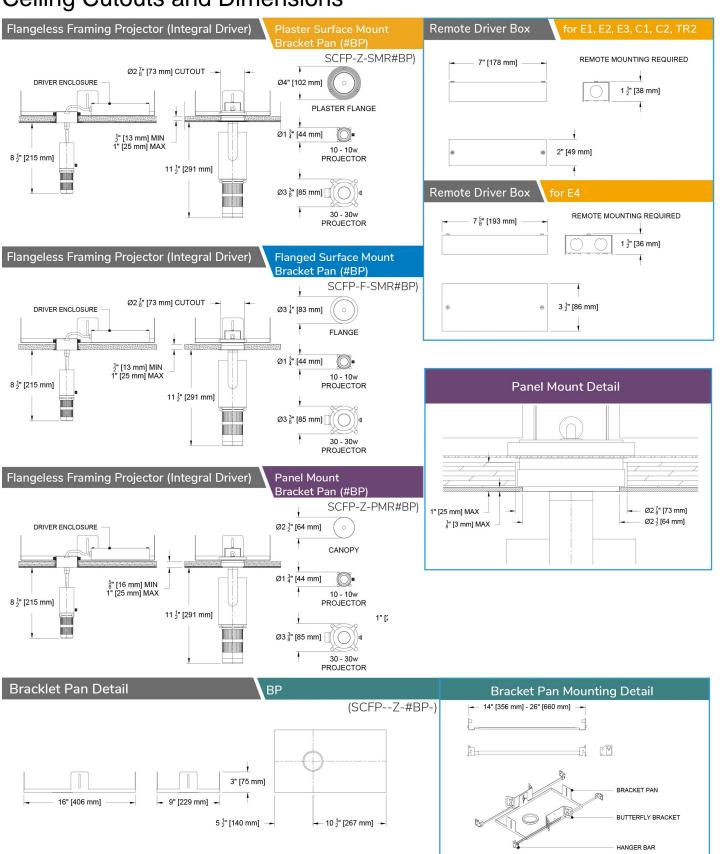



Flangeless Framing Projector (Integral Driver)

Large Junction Box Surface Mount (SMLJB)

SCFP-Z-SMLJB)

