

Scope O 2.5" Square Downlight (64mm)

Formerly known as 4509
Fixed Recessed Accent Light

Scope Original

The Scope Original is a small aperture downlight family used to great acclaim in thousands of projects over the last 20 years. We have expanded this offering with new mounting options, a large selection of source technology and control options. This modifiable fixture has over 40 finish options including a wood trim selection. You have found the Square Downlight Datasheet and we hope you enjoy the details.

PROJECT: TYPE:
SPECIFIER: DATE:


Key Points (SCOD-S)

- Trim
- Machined aluminum body in USA
 - Wood trim bezel available on Flangeless option
 - 40 color options + custom RAL available for trim flange and bezel. Finishes can be mixed and matched
 - Flange or flangeless

- Source / Optics
- 3 beam spreads - 15°, 22° and 36°
 - Up to 1304 delivered lumens
 - <2 MacAdams Ellipses (<2 SDCM)
 - 90+ CRI, 60+ R9 Standard, 95+ CRI, 90+ R9 available with Ambient Dim option
 - 2400K, 2700K, 3000K, 3500K, 4000K Ambient Dim and Tunable White Options Available
 - **TITLE 24** Source supports California Title 24 compliance to JA8 requirements except for T7-1840 tunable white source
 - Lifetime: L87B3>55,000 hours at 40° C ambient for fixed white

- Housing
- 2 pan options, IC / Airtight rated for use in direct contact with insulation (not for spray foam)
 - **CS** listed for damp location - wet rating with Shower Trim selection
 - **TITLE 24** IC Rated / airtight housing approved for use in direct contact with insulation Chicago Plenum Available and supports CA Title 24 compliance
 - Remodel or millwork option available

- Driver And Control
- Drivers are integral with fixtures unless noted as remote mount with * in ordering code options. "K can" type drivers do not fit through the 2.5" hole
 - TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control
 - Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™
 - Universal 120-277v

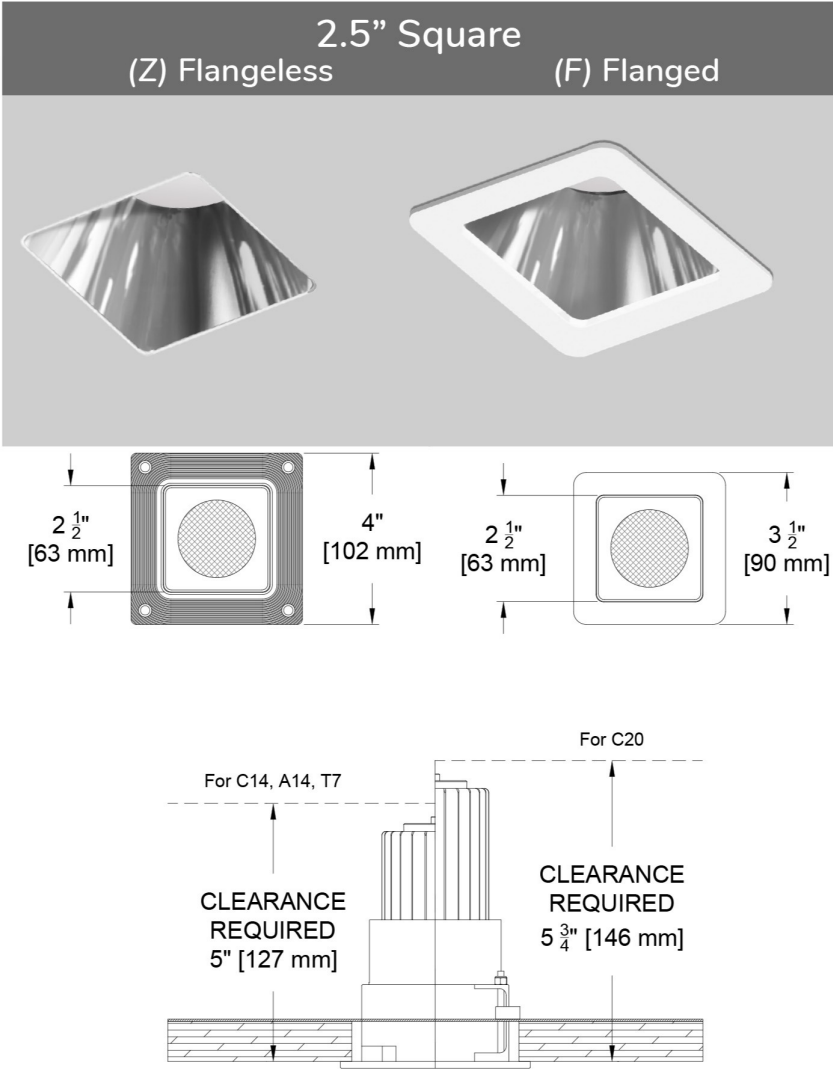

2.5" Aperture Options



Deep Regress (DR)



Wood Available (WD)

PERFORMANCE SUMMARY CHART					
	CITIZEN		TUNABLE WHITE®		AMBIENT DIM®
Source	CZ14	CZ20	T7	T7	AD14
CCT (color tune)			1840	2765	3019
Delivered Lumens	985	1340	418	513	680
Watts	14	20	10	10	15
Fixture Efficacy (LPW)	70	67	42	51	45

Data based on 22° beam at 3000k. Tunable white at mid-point CCT. Ambient Dim at full output
Tunable White 1840 does not meet Title 24 JA8 efficacy requirements

Scope O 2.5" Square Downlight (64mm)

Formerly known as 4509
Fixed Recessed Accent Light



Ordering Codes

PROJECT: SPECIFIER:
DATE: TYPE: QUANTITY:

Ordering Code Example: SCOD-S-F-NP-C20-30-22-C1-A32-A32-91L

FIXTURE	TRIM	MOUNTING	SOURCE / WATTS	CCT	BEAM	DRIVER / CONTROL	BEZEL FINISH	TRIM FINISH	LENS ACCESSORIES	ACCESSORIES
SCOD-S										
Scope Original 2.5" Downlight - Square	F Flanged Trim	NP New Pan (IC/Airtight) for Mounting to bottom of wood studs^	Citizen	24 2400K	15 Spot	C1 0-10 1.0%, UNV (120-277V) linear	A01 Black Anodize	A01 Black Anodize	Reflector (lamp) Media	CP Chicago Plenum
	Z Flangeless Trim		C14 ●● 14W 985Lm* 90+CRI, 60+R9	27 2700K	22 Narrow Flood	C2 ELV/Triac 1.0%, (120V) linear	A32 Clear Aluminum Anodize	A32 Clear Aluminum Anodize	91L Solite	EM Emergency Pack
	FS Flanged Shower Trim*	BP Bracket Pan (IC/Airtight) for mounting with hanger bars to studs or T-bar^	C20 ●● 21W 1340Lm* 90+CRI, 60+R9	30 3000K	36 Flood	E1 0-10* 0.1%, UNV (120-277V) log			92L Supertex (spreader lens)	Controls
	ZS Flangeless Shower Trim*		Tunable	35 3500K		E2 DALI-2* 0.1%, UNV (120-277V) log			97L Black Hexcel Louver	LR Lutron Wireless RF PowPak
	Requires aperture lens selection for wet listing	AT ●● Airtight / IC Housing	T7 ●● 10W 90+CRI, 60+R9 Tunable White	40 4000K		E3 0-10* 0.1%, UNV (120-277V) linear	AXX Other Anodize colors*	AXX Specialty anodize color*	XXL Other reflector (lamp) media*	ATH Lutron Athena Wireless Node
		PM Panel Mount §	T20 ●● 21W 90+CRI, Tunable White	TW1840 1800-4000K Tunable White w/ E1, E2, E3, E4		E4 ^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX	A1-A36	A1-A36	* See Lens Accessory Guide	Must be used with E2 driver (DALI-2)
		RM Remodel mounts direct to ceiling - Wing Springs for flanged and drywall anchors for flangeless	Ambient Dim™	TW2765 2700-6500K Tunable White w/ E1, E2, E3, E4		^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS	D Wood**	W White Paint		CA Casambi Wireless BLE to be paired with driver
		●● Supports CA Title 24 compliance to JA8 requirements	A14 ●● 15W 95+CRI,				PXX Specialty Paint Color*	PXX Specialty Paint Color*		
		* Chicago Plenum available with AT	A20 ●● 21W 858Lm 95+CRI, 90+R9	2722* 2700-2200K *A14 Only		TR2 TruPhase™ 0.1%, (100-277V) Up to 20W Forward and Reverse compatible Phase Dimming	C Custom/RAL Color*	C Custom/RAL Color*		
		^Not for use with spray foam insulation	●● CA Title 24 Compliant	3019 3000-1900K		2 Dimming Curves: Linear/Logarithmic Static White & Ambient Dim only				
		§ Must be used with flangeless trims.	* Based on 22" Beam	3022 * 3000-2200K *A14 Only		LD Digital Ecosystem* 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1				
			**1840 CCT does not meet Title 24	* Not compliant with California Title 24		* Requires remote mounting				
			^Based on 2765 CCT							
			+LTT or EdoLED driver selection required and will be supplied with 2 Channel version							


Scope O 2.5" Square Downlight (64mm)

Formerly known as 4509


Fixed Recessed Accent Light

Fixture Details


Machined receiver with integral trim holder / plaster flange attaches to pan or housing with ceiling clamps. Light engine and trim bezel attaches to receiver with ball plungers

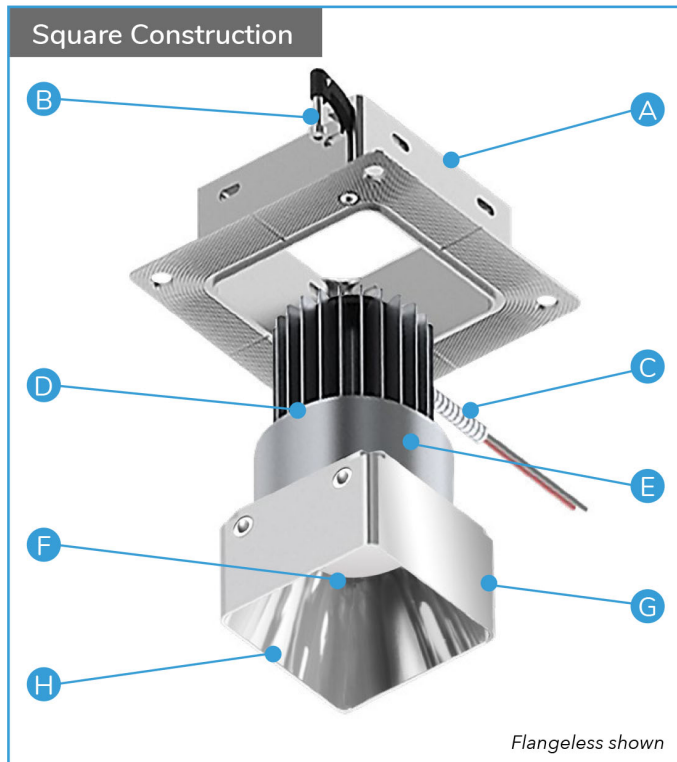

Flanged Trim Option

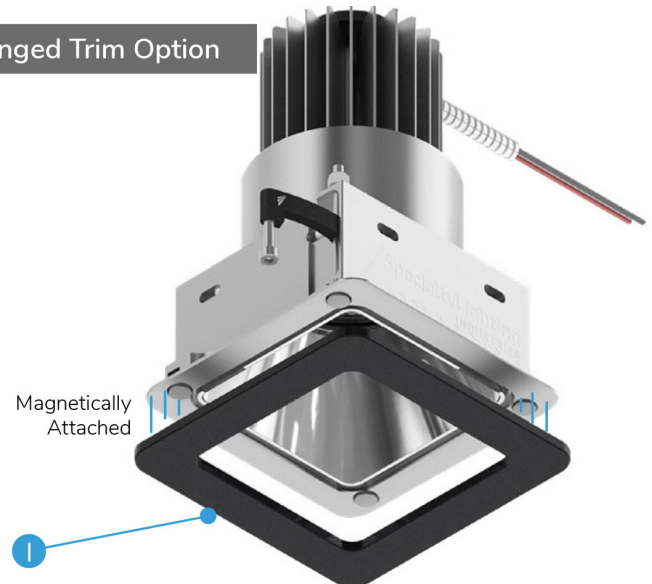


Flanged Finish Options

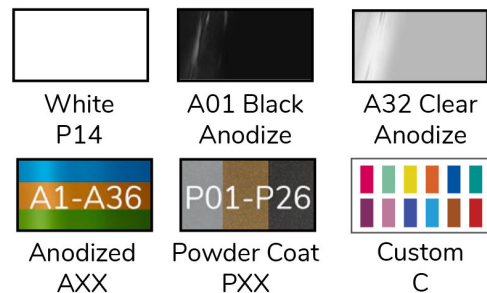

Trim Bezel Finish Options




Panel Trim Option

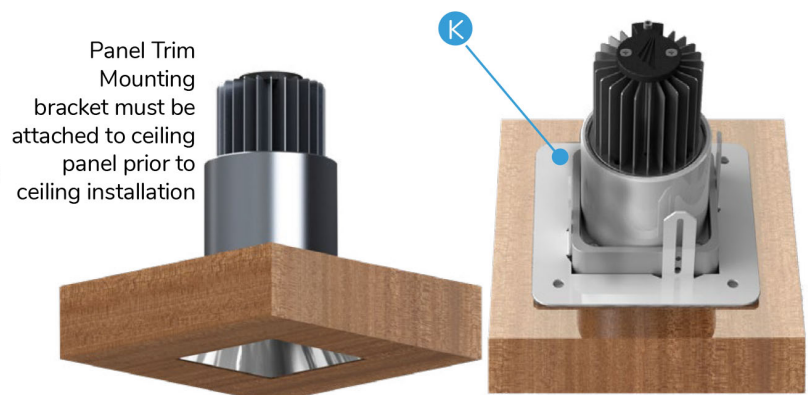

Square Assembly Specs

- A** Receiver – High Grade Aluminum precision machined in U.S.A. with integral flange
- B** Ceiling Clamp- Inserts into ceiling and automatically spreads during installation
- C** 22AWG wire to Driver. Enclosed in flexible conduit connected to driver enclosure.
- D** Thermal management system and body. High grade anodized aluminum, precision machined in the U.S.A.
- E** LED Assembly- Field serviceable as part of thermal management system (not shown)
- F** Reflector optic- Field changeable
- G** Bezel holder- Precision machined in the U.S.A. with ball stud attachment feature for solid locking and field service
- H** Trim Bezel, Molded Polycarbonate finished with 4 color options
- I** Integral driver and enclosure – UL approved for IC-serviceable from below the ceiling
- J** Finish Trim Flange magnetically attached (flange option)
- K** Receiver and mounting bracket for Panel Trim/ millwork wood ceiling




Ceiling Cutouts and Dimensions

Square New or Bracket Pan

Flangeless Trim (Z)


(SCOD-S-DR-Z-BP / NP-)

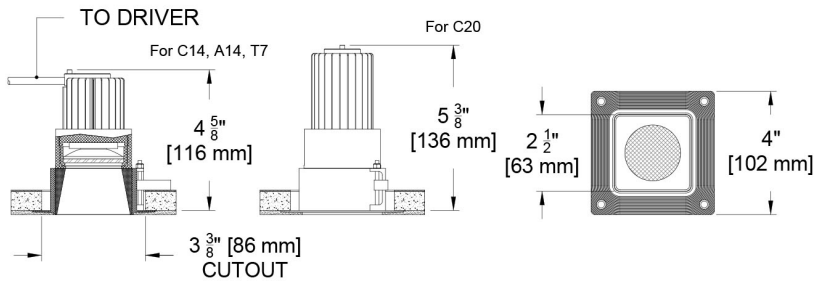

Square New or Bracket Pan


Flanged Trim (F)

(SCOD-S-DR-F-BP / NP-)

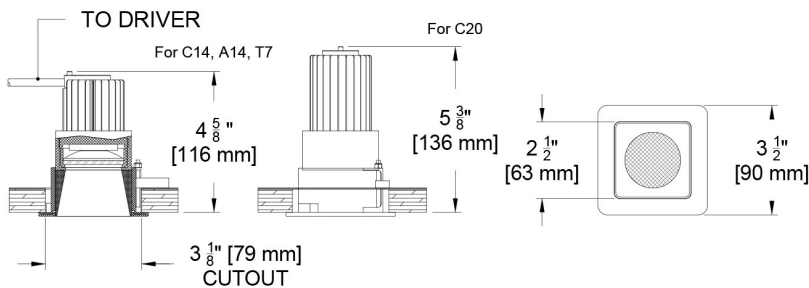


Square Panel Mount

(SCOD-S-DR-Z-PM-)

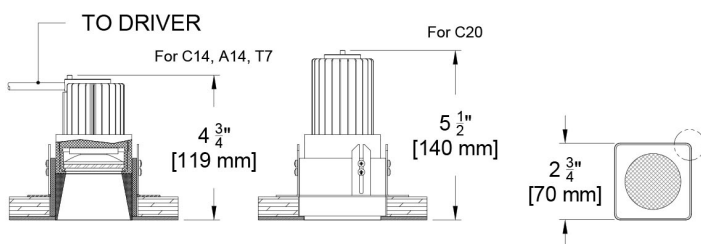

Panel Mount Detail

(SCOD-S-DR-Z-PM-)

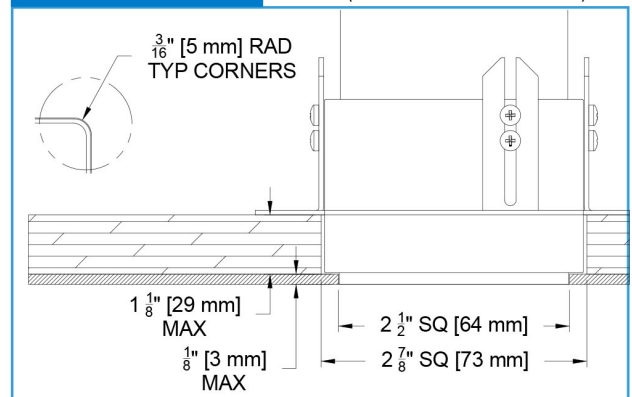


Ceiling Cutouts and Dimensions

Square Remodel

Flangeless Trim (Z)


(SCOD-S-DR-Z-RM-)

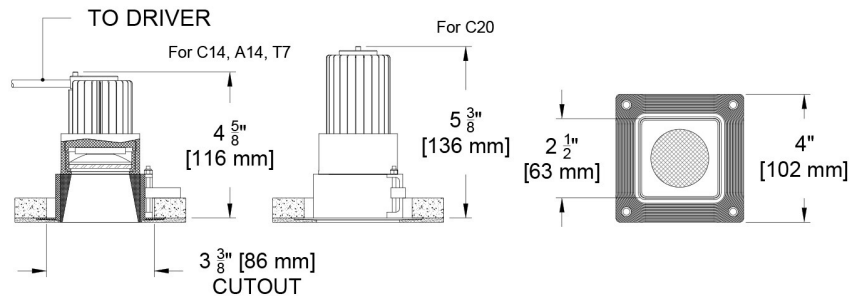

Square Remodel


Flanged Trim (F)

(SCOD-S-DR-F-RM-)

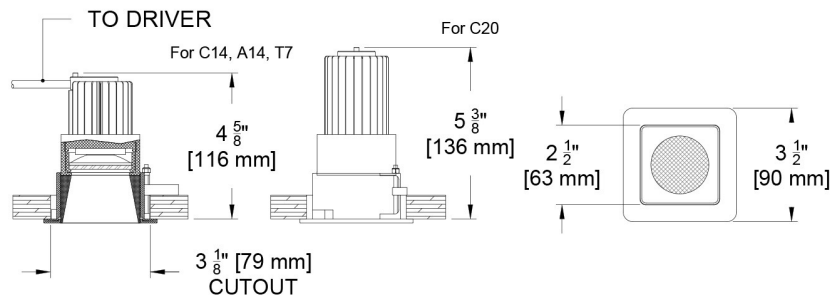


Driver Enclosure

for C1, C2, TR2

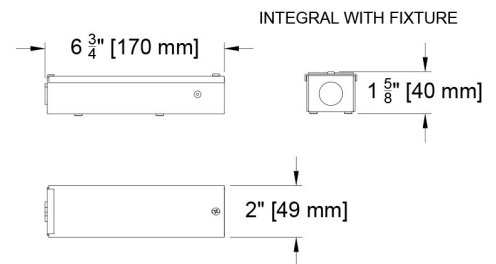


Driver Enclosure

for E1, E2, E3, E4, LD

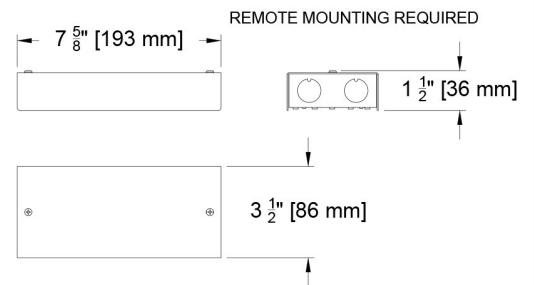

Square Airtight (AT)

(SCOD-S-DR-_-AT-)


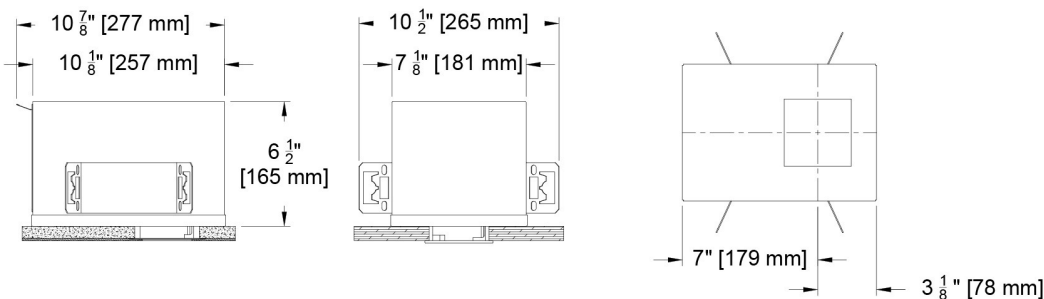


Mounting Options

New Pan

(SCOD-S-X-X-NP)

For new construction and attachment to bottom of studs

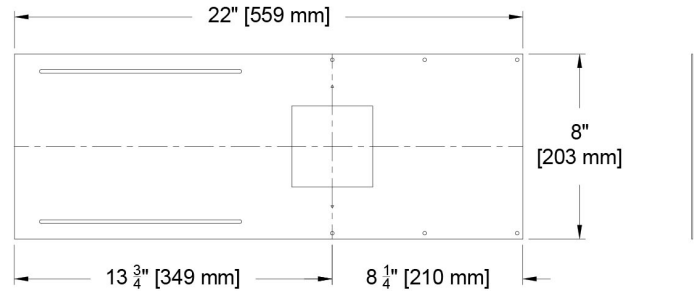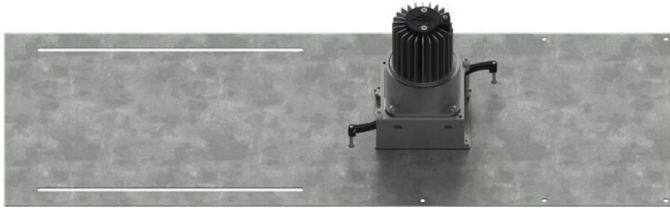


Bracket Pan



(SCOD-S-X-X-BP)

For new construction using hanger bars for attaching to studs or drop ceiling

Option 1- Attaching to Studs

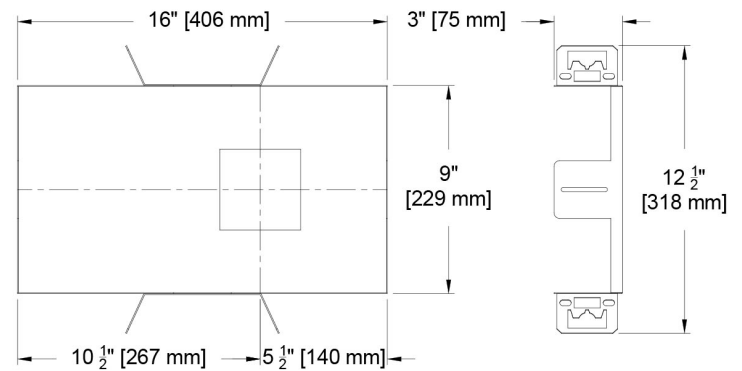

Option 2- Attaching to Drop Ceiling


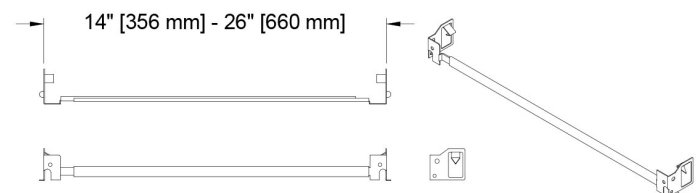
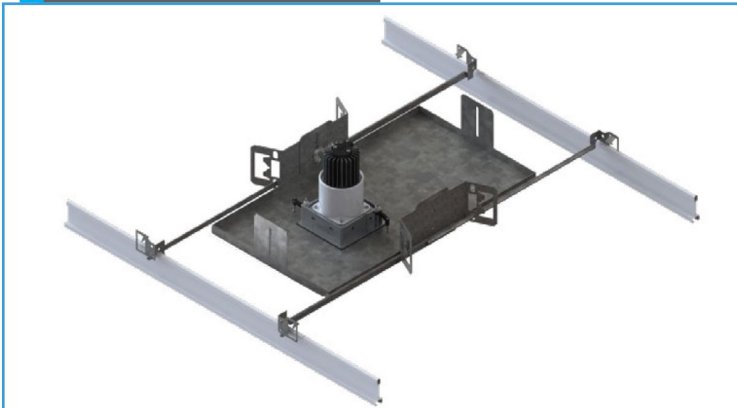


Note: For panel trim mounting see page 3 for picture of detail or refer to installation instructions

Photometric Table

All data below are delivered lumens based on goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated flux range.

SQUARE Beamspreads			10°					20°					30°				
Source		System watts (W)	Deliv-ered Lumens (lm)	Lumens/ Watt	UGR	Peak cd	10% Field	Deliv-ered Lumens (lm)	Lumens/ Watt	UGR	Peak cd	10% Field	Deliv-ered Lumens (lm)	Lumens/ Watt	UGR	Peak cd	10% Field
Deep Regress	Citizen C14	14	947	68	29	5411	45°	985	70	29	3895	53°	870	62	31	1786	70°
	Citizen C20	21	1304	62	31	7266	46°	1340	64	30	5371	53°	1294	62	32	2703	69°
	Ambient Dim A14	15	660	45	28	4483	39°	680	46	28	2934	50°	657	45	29	1410	68°
	Tunable White 1840	10	391	39	22	2264	41°	418	42	22	2007	45°	411	42	24	892	67°
	Tunable White 2765	10	501	51	22	2885	41°	513	52	22	2539	45°	526	53	25	1182	67°
CCT Multiplier																	
CCT	Citizen																
2700	0.95																
3000	1.00																
3500	1.02																
4000	1.03																
All Measurements are delivered lumens based on 3000K unless otherwise noted below. Ambient dim measured at full output. Tunable White measurements at mid-point CCT of range (2700k for 1840 and 4500k for 2765). UGR values based on 4H 3H table cell. Tunable White T7 - 1840 does not meet CA Title 24 JA8 efficacy requirements. 15° tunable white not recommended due to source imaging																	


Beam angle  15.2°	Beam angle  22.1°	Beam angle  35.5°
--	---	--

Color Data

All data below are delivered lumens. Color and flux information based on goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated nominal data as listed on their datasheet.


Citizen C20 and C14

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

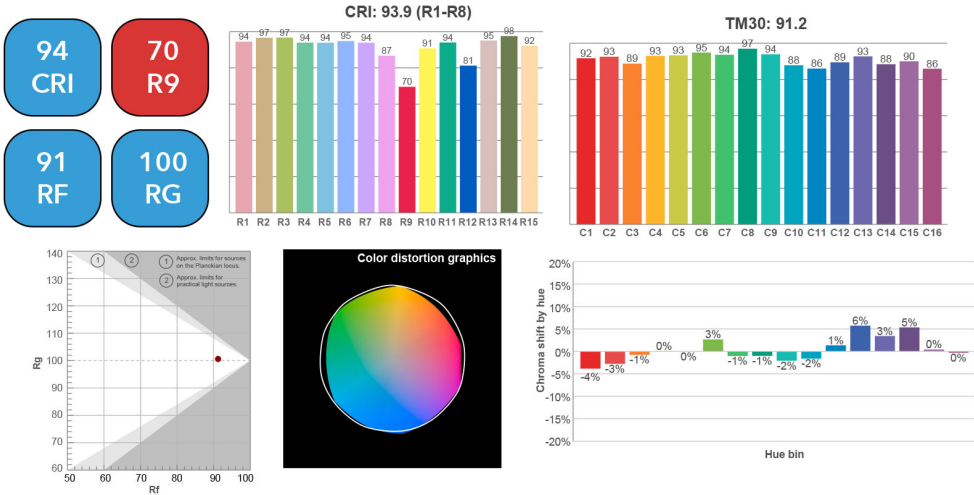


Ambient Dim - 3000k to 1900k


- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

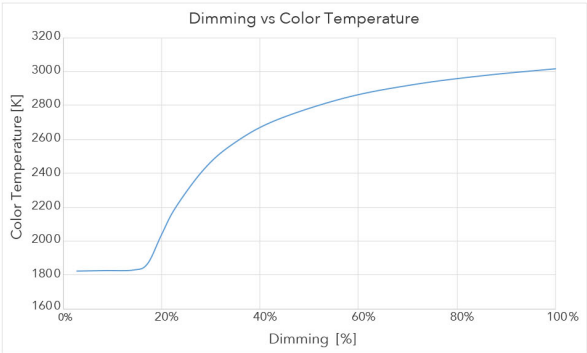

3000 CCT Full Output

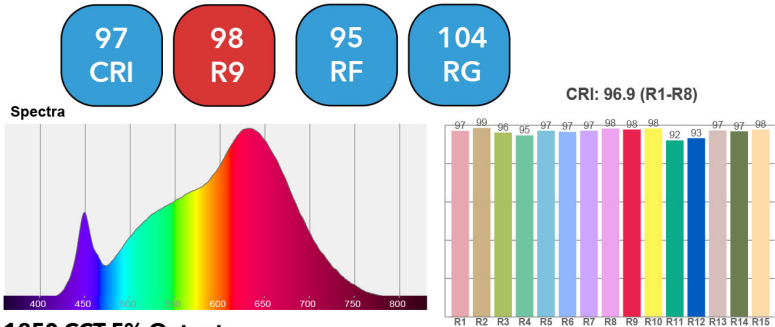

1850 CCT 5% Output

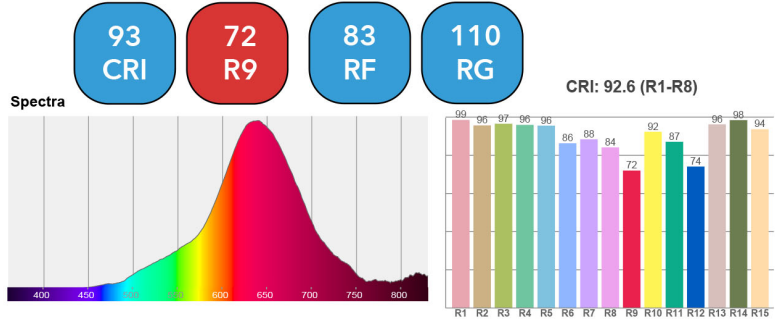


Tunable White 1800k to 4000k


- <3 MacAdam Ellipse (<3 SDCM)
- 94 CRI average across all CCTs
- 76 R9 average across all CCTs
- Available with wired or wireless control

INK	TUNABLE WHITE - 1800-4000K						
	Color Temp	1800	2200	2500	2700	3000	4000
	System Watts	10	10	10	10	10	10
	Delivered Lumens	379	433	468	491	539	571
	Luminaire Efficiency	40	46	49	52	57	60
Flux and Color data based on 20° measurement at 2700k. All other values are extropolated from actual and analytical tests							


Spectral Power Distributions at all listed CCTs available upon request

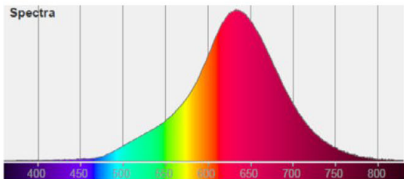

1800K

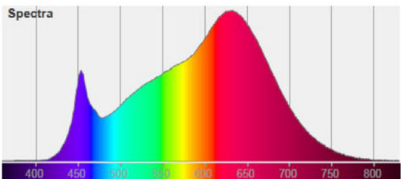

3000K

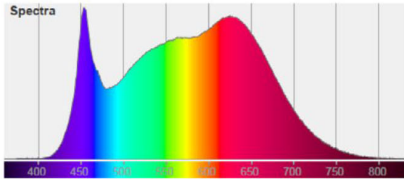


4000K

94
CRI

76
R9

89
RF

97
RG

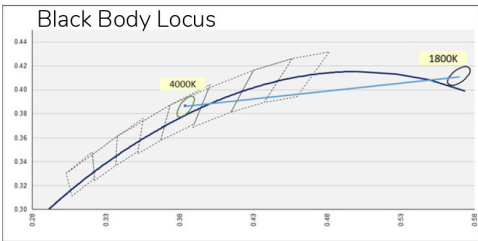


Tunable White 2700k to 6500k


- <3 MacAdam Ellipse (<3 SDCM)
- 94 CRI average across all CCTs
- 96 R9 average across all CCTs
- Available with wired or wireless control

INK	TUNABLE WHITE - 2700-6500K								
	Color Temp	2700	3000	3500	4000	4500	5000	5500	6500
	System Watts	10	10	10	10	10	10	10	10
	Delivered Lumens	602	620	640	640	640	639	638	644
	Luminaire Efficiency	63	65	67	67	67	67	67	68
Flux and Color data based on 20° measurement at 4500k. All other values are extropolated from actual and analytical tests									


Spectral Power Distributions at all listed CCTs available upon request

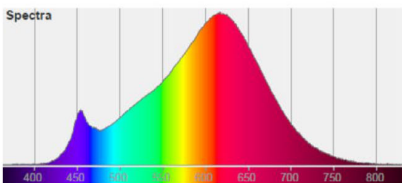

2700K

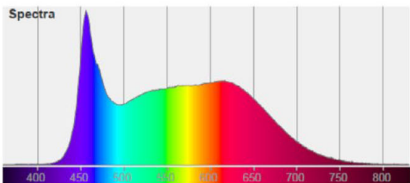

5000K

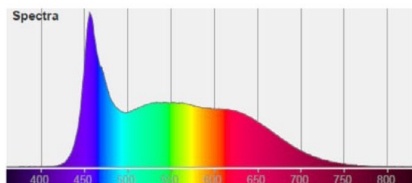

6500K

96
CRI

96
R9

91
RF

99
RG

