Scope Original- Wall Wash

The Scope Monopoint offers several standard mounting conditions, the system is highly flexible and facilitates modifications. If you need a mounting condition you don't see, just ask. The Monopoint offers most of the same sources and drivers as it's downlight kin allowing flawless transition from recessed to exposed fixtures. Last but not least, the aluminum components, machined in New Jersey, allow for powder coat painting or anodize, opening our full pallet of 40 standard finishes plus the option for RAL# or custom paint match.

PROJECT: TYPE:

SPECIFIER: DATE:

Key Points (SCOM-RA.)

Housing

- CSA listed to UL 1598 - damp rated
- Precision CNC machined aluminum in New Jersey
- 40 finish options + Custom/RAL#
- Multiple mounting options, including sloped ceilings
- Flanged (can be used in wood or GWB), Flangeless, or Panel Trim (millwork)
- Adjustable 360° degree rotation and 90° degree tilt

Source / Optics


- 2400, 2700, 3000, 3500, 4000K
- AmbientDim™, RGBW & Tunable White options
- 90+ CRI, 60+ R9 Standard, 95+ CRI, 90+ R9 available with Ambient Dim option
- <2 MacAdams Ellipses (<2 SDCM) for fixed white
- Up to 1307 delivered lumens
- 2 options for tunable white - 2700k to 6500k and 1800k to 4000k
- TITLE 24 Compliant to JA8 with Airtight Housing
- View Photometry


Driver / Control

- Drivers integral with fixture in some mounting options - see drawings
- TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™selection
- Universal 120-277v





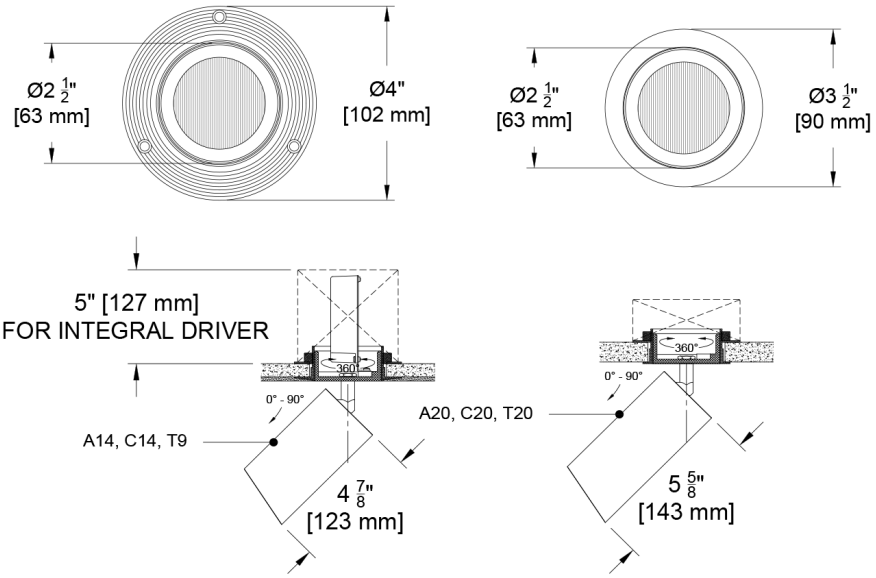

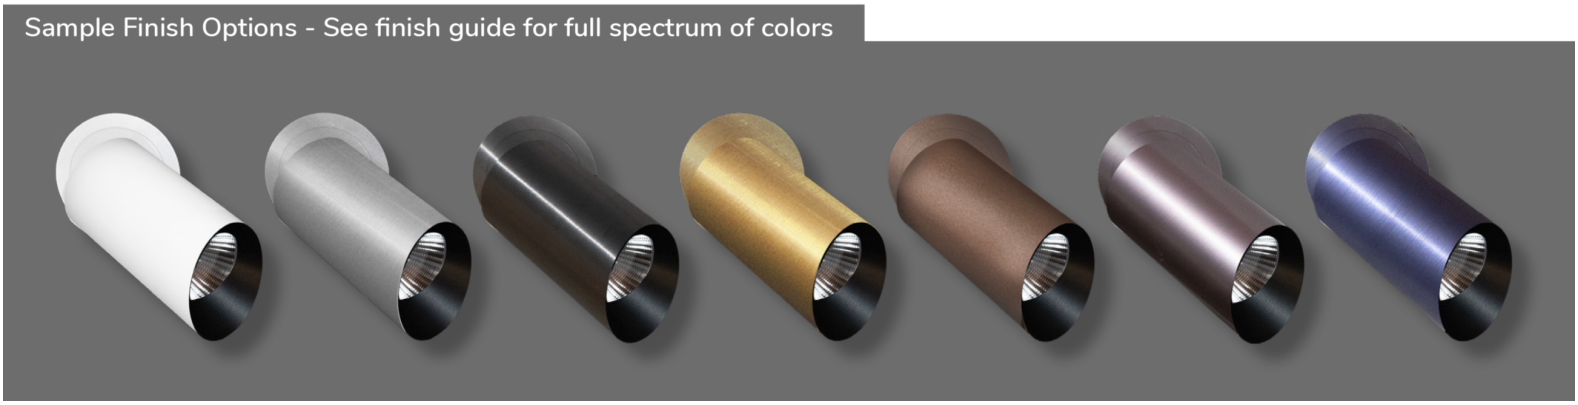

© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:48 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Scope O 2.5" Round Wall Wash Monopoint (64mm)

Adjustable Surface Wall Wash

Ordering Codes

PROJECT: SPECIFIER:

DATE: TYPE: QUANTITY:

Ordering Code Example: SCOM-RA-F-SM-C14-30-35-WW-C1-A01-91L

FIXTURE	TRIM	MOUNTING	LUMENS / WATTS	CCT	BEAM	DRIVER / CONTROL	HEAD FINISH	ACCESSORIES
SCOM-RA.								
Scope Original 2.5" Mono-point - Round - Wall Wash	**Standard (2.5")** F Flanged Trim Z Flangeless Trim **Canopy (4")** CP Canopy Plate for use with 4" Diameter Pancake Box/Octagonal Box	SM * † Surface Mount SMR ^ Δ Surface Mount SMHS -Surface Mount * † *w/ Hang Straight* SCSMR Sloped Ceiling Surface Mount ^ Δ *w/ Hang Straight* SMLJB - Surface Mount † Large Junction Box PM Panel Mount * † PMR ^ Δ Panel Mount SCPM ^ † Sloped Wood Ceiling Panel Mount SCPMR ^ Δ Sloped Ceiling Panel Mount *furnished with Hang Straight* CM Δ Canopy Mount **Retro-fit Installation** SHM Δ Shallow Surface Mount **Shallow Panel Installation** SHPM Δ Shallow Panel Mount * Deep double gang Handy box supplied by others for driver enclosure ^ Double gang Handy box supplied by others for fixture mount and low voltage wiring † Intergral Driver Δ Remote Driver ***# - Bracket Pan available - Add #BP after mounting option***	**Citizen** C14 14W 1292Lm* 90+CRI, 60+R9 C20 21W 1422Lm** 90+CRI, 60+R9 **Tunable** T20 21W 1490Lm^ 90+CRI, 60+R9 *Tunable White* RGBW 90+CRI, 60+R9 T7 10W 90+CRI, 70+R9 *Tunable White* T14 90+CRI, 60+R9 *Tunable White* **Ambient Dim™** A14 15W 851Lm* 95+CRI, 90+R9 A20 15W 858Lm 95+CRI, 90+R9 Supports CA Title 24 compliance to JA8 requirements (except 1840 20° and 40°) View Photometry	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K **Tunable** TW1840 1800-4000K Tunable White *w/ E1, E2, E3, E4* TW2765 2700-6500K Tunable White *w/ E1, E2, E3, E4* RG1280 1200-8000K RGBW Dynamic Color Changing **Requires E2 or E4* **Ambient Dim™** 2722 2700-2200K **A14 Only* 3019 3000-1900K 3022 3000-2200K **A14 Only*	WW Wall Wash	C1 0-10 1.0%, UNV (120-277V) linear C2 ELV/Triac 1.0%, (120-277V) linear E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear E4^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller *RGBW-DMX* *^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS* TR2 TruPhase™ 0.1%, (120-120V) log Up to 20W Forward and Reverse compatible Phase Dimming Static White & Ambient Dim only LD Digital Ecosystem* 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1 * Requires remote mounting ^integral driver standard, remote optional	AM01 Black Matte Anodize^ AMXX Specialty Matte Anodize Color*^ AM1-AM36 A32 Clear Anodize^ AXX Specialty Anodize Color*^ A1-A36 W White Paint^ PXX Specialty Paint Color*^ P01-P15 B05 Satin Brass^ BXX Brass Finishes*^ B01-B07 ^Stem comes in selected color * See Finish Guide FINISH GUIDE LINK	**Other** STM Stem standard length 3/4" For custom size, indicate in inches **Controls** LR Lutron Wireless RF PowPak ATH Lutron Athena Wireless Node *Must be used with E2 driver (DALI-2)* CA Casambi Wireless BLE to be paired with driver EM Emergency Pack BABA BABA Compliant BABA Products LENS ACCESSORY VISUAL GUIDE LINK

© 2026 Specialty Lighting Industries


NOTE: Last Updated on Wed, Oct 21, 2026 4:48 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Ceiling Cutouts and Dimensions

Flangeless Monopoint (Integral Driver) | Plaster Surface Mount (SM)

(SCOM-RA-Z-SM-)

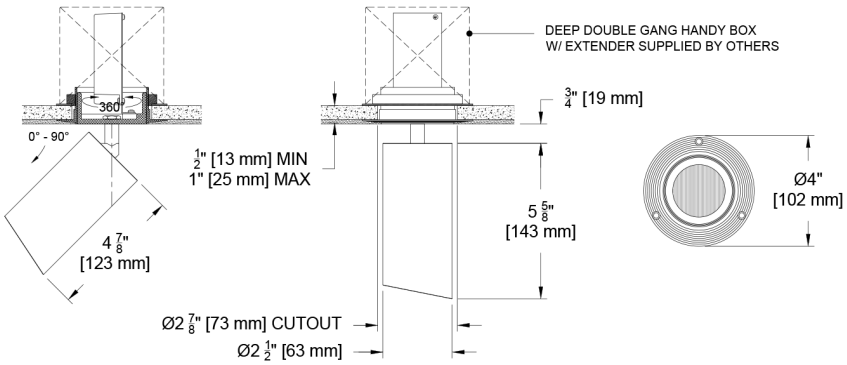


Integral Driver

See *Integral Driver Detail* page for recessed depth and j-box configurations by driver type.


Flanged Monopoint (Integral Driver) | Flanged Surface Mount (SM)

(SCOM-RA-F-SM-)

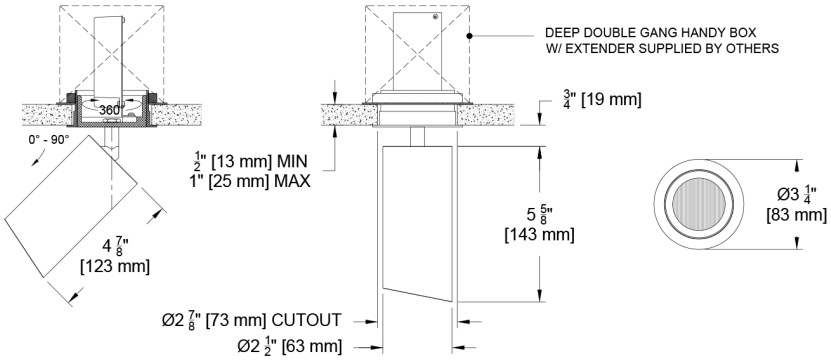


Flangeless Monopoint (Integral Driver) | Panel Mount (PM)

(SCOM-RA-Z-PM-)

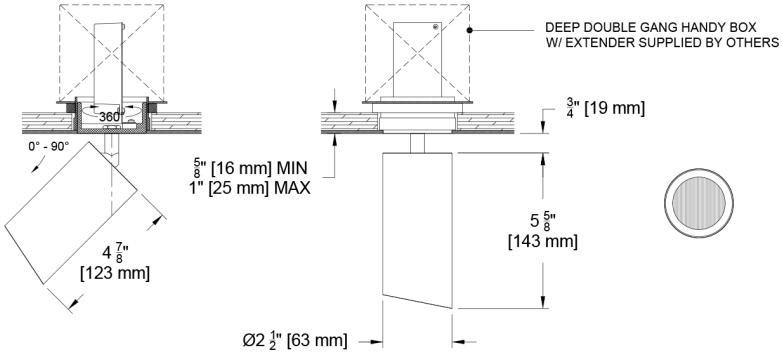

Panel Mount Detail

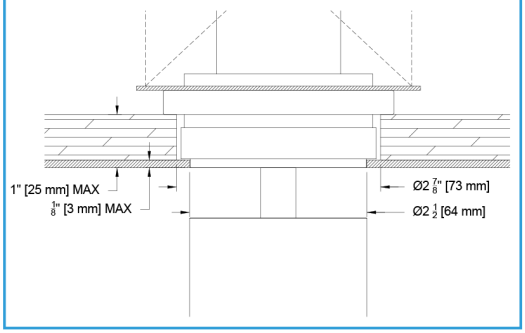


© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:48 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971


Ceiling Cutouts and Dimensions

Flangeless Monopoint (Remote Driver) | Plaster Surface Mount (SMR)


(SCOM-RA-Z-SMR-)

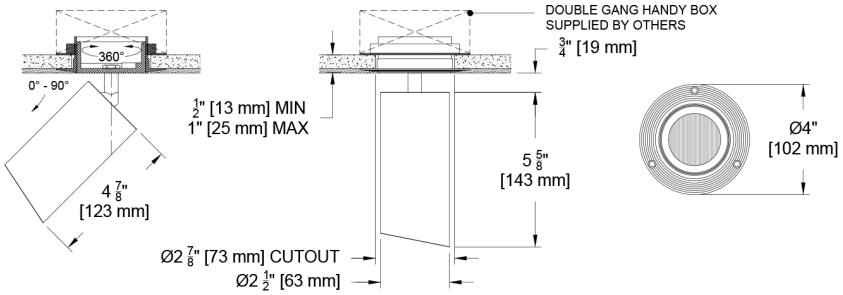

Remote Driver Box for E1, E2, E3, C1, C2, TR2

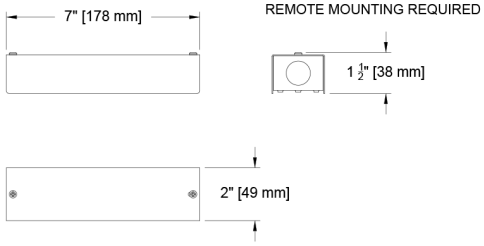


Remote Driver Box for E4, LD

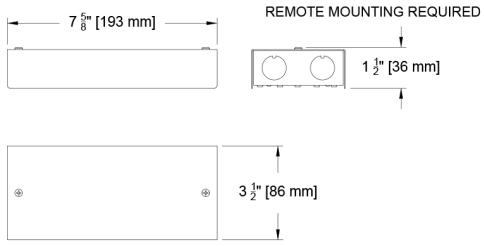


Flangeless Monopoint (Remote Driver) | Flanged Surface Mount (SMR)

(SCOM-RA-F-SMR-)

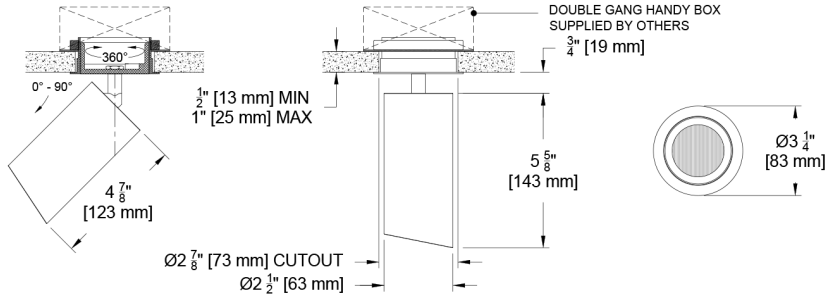


Flangeless Monopoint (Remote Driver) | Panel Mount (PMR)

(SCOM-RA-Z-PMR-)

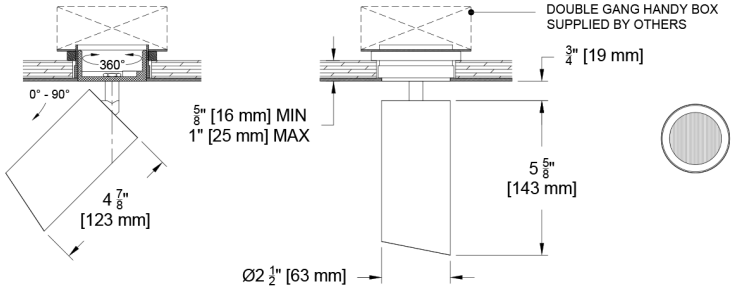

Panel Mount Detail

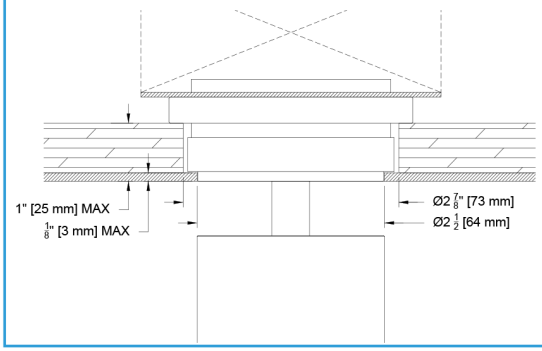


© 2026 Specialty Lighting Industries

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Ceiling Cutouts and Dimensions


Flangeless Monopoint (Remote Driver) | Plaster Retro-fit / Shallow Surface Mount (SHM)

(SCOM-RA-Z-SHM-)

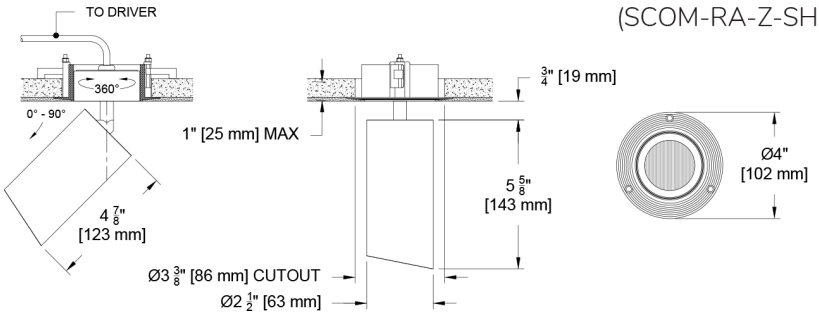


Flanged Monopoint (Remote Driver) | Flanged Retro-fit / Shallow Surface Mount (SHM)

(SCOM-RA-F-SHM-)

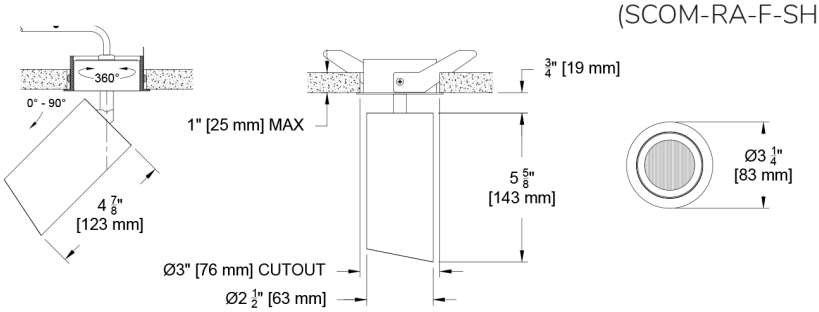


Flangeless Monopoint (Remote Driver) | Panel Mount Retro-fit / Shallow Panel Mount (SHPM)

(SCOM-RA-Z-SHPM-)

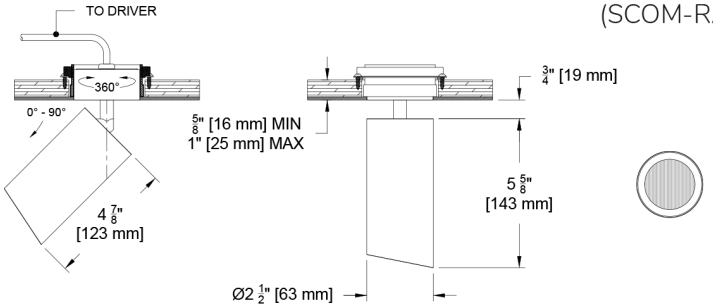


Canopy Plate (Remote Driver) | Canopy Mount (CP-CM)


(SCOM-RA-CP-CM-)

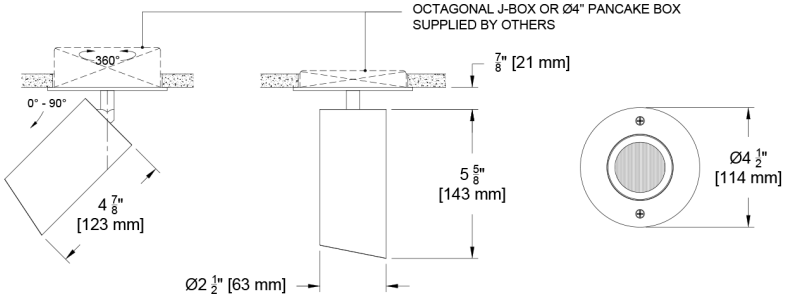


Remote Driver Box for E1, E2, E3, C1, C2, TR2

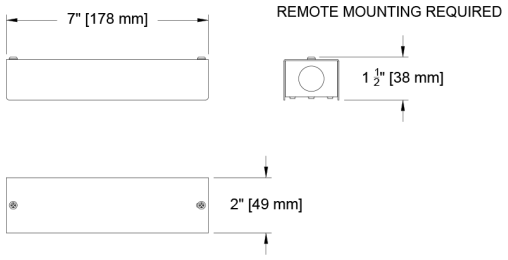

Remote Driver Box for E4, LD

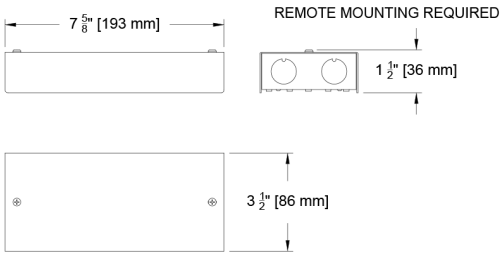

Panel Mount Detail

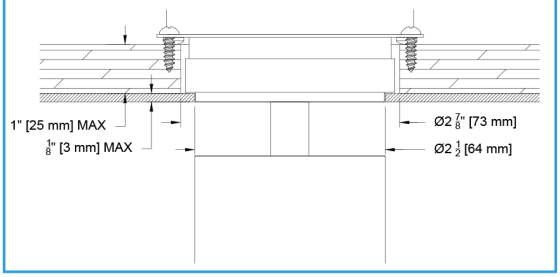

© 2026 Specialty Lighting Industries


Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Ceiling Cutouts and Dimensions


Flangeless Monopoint (Remote Driver)

Plaster Surface Mount Sloped Ceiling Remote Driver (SCSMR)


(SCOM-RA-Z-SCSMR-)

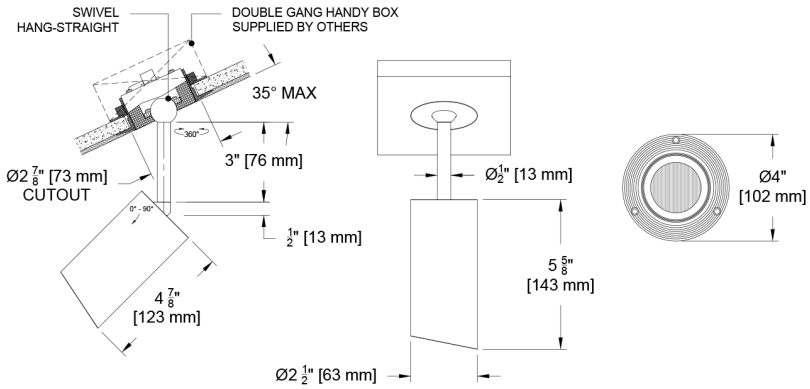

Remote Driver Box for E1, E2, E3, C1, C2, TR2

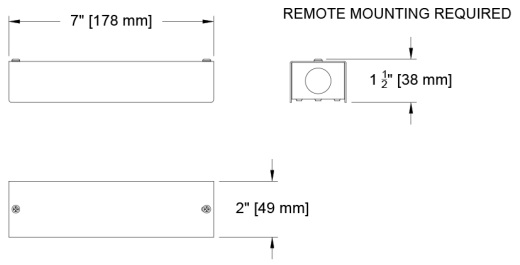


Remote Driver Box for E4, LD

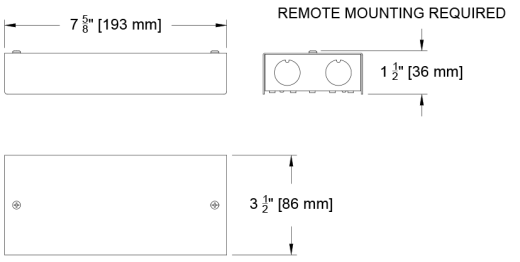

Flanged Monopoint (Remote Driver)

Flanged Surface Mount Sloped Ceiling Remote Driver (SCSMR)


(SCOM-RA-F-SCSMR-)

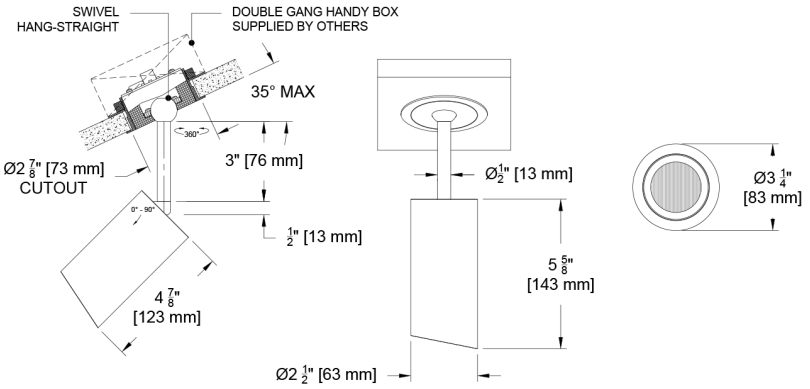


Flangeless Monopoint (Remote Driver)

Panel Mount Sloped Ceiling Remote Driver (SCPMR)

(SCOM-RA-Z-SCPMR-)

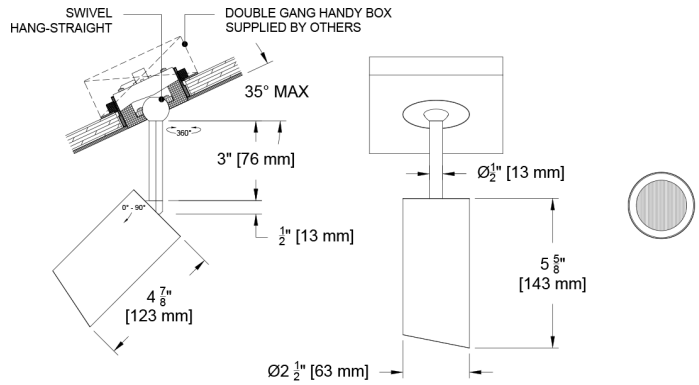

Panel Mount Detail

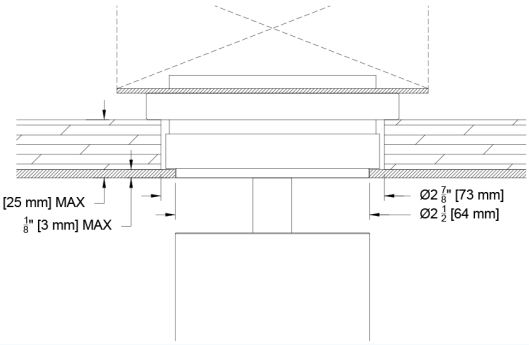

© 2026 Specialty Lighting Industries


Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Ceiling Cutouts and Dimensions


Flangeless Monopoint (Integral Driver)

Plaster Surface Mount Sloped Ceiling Integral Driver (SCSMR)


(SCOM-RA-Z-SCSMR-)

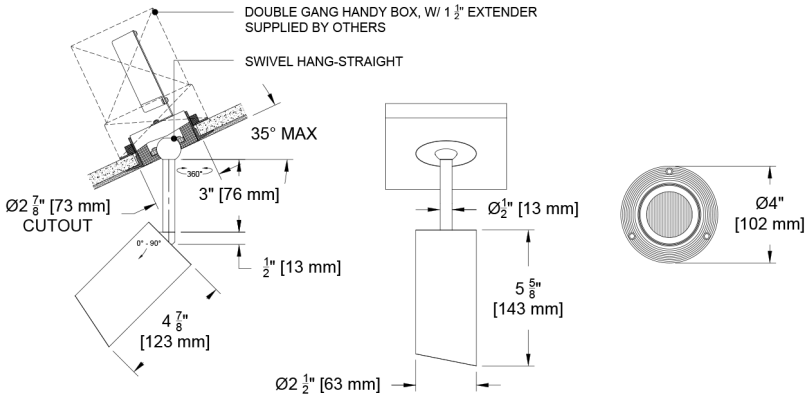

Remote Driver Box for E1, E2, E3, C1, C2, TR2

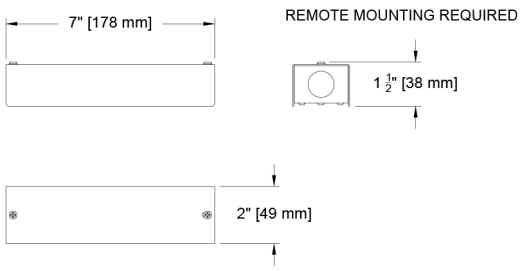


Remote Driver Box for E4, LD

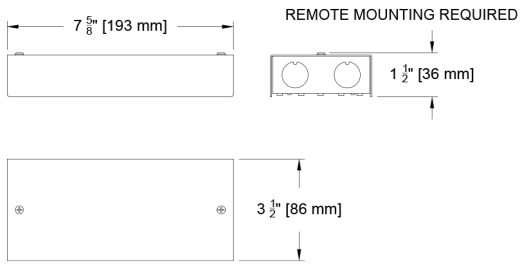

Flanged Monopoint (Integral Driver)

Flanged Surface Mount Sloped Ceiling Integral Driver (SCSMR)


(SCOM-RA-F-SCSMR-)

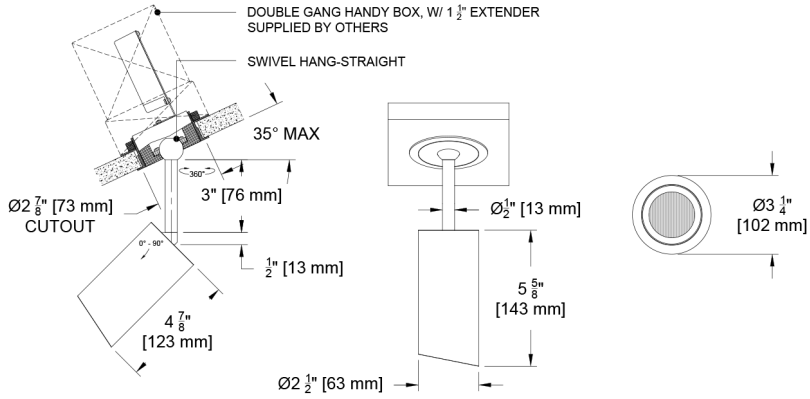


Flangeless Monopoint (Integral Driver)

Panel Mount Sloped Ceiling Integral Driver (SCPMR)

(SCOM-RA-Z-SCPMR-)

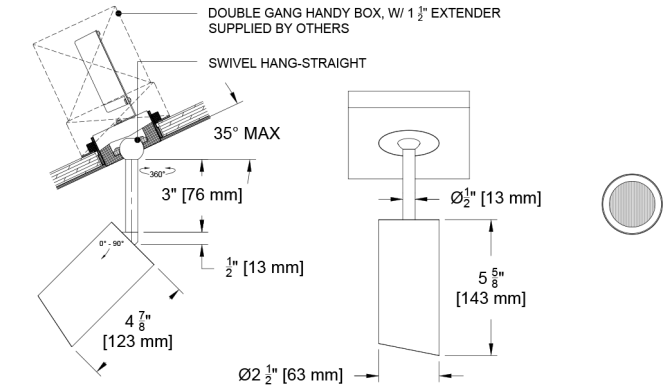

Panel Mount Detail

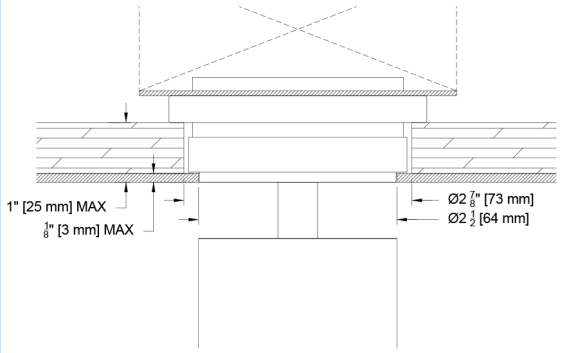


© 2026 Specialty Lighting Industries

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Ceiling Cutouts and Dimensions

Surface Mount (Integral Driver) | Large J-Box

(SCOM-RA-Z-SMLJB-)

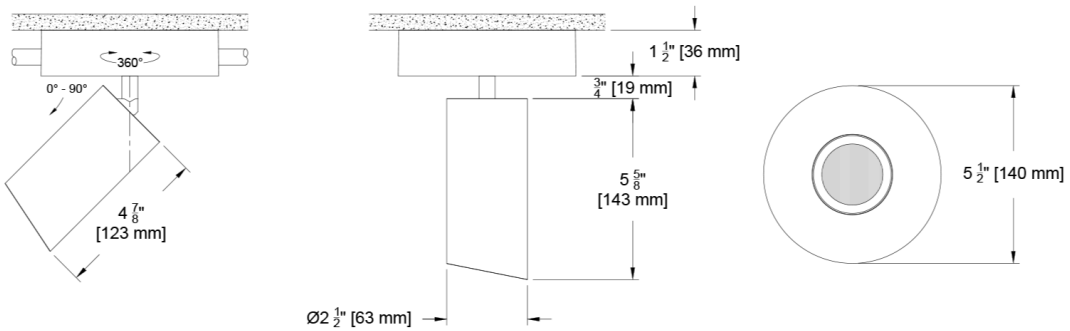


© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:48 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971


Ceiling Cutouts and Dimensions

Flangeless Monopoint (Integral Driver) | Plaster Surface Mount (SMR) Bracket Pan (#BP)


(SCOM-RA-Z-SMR#BP-)

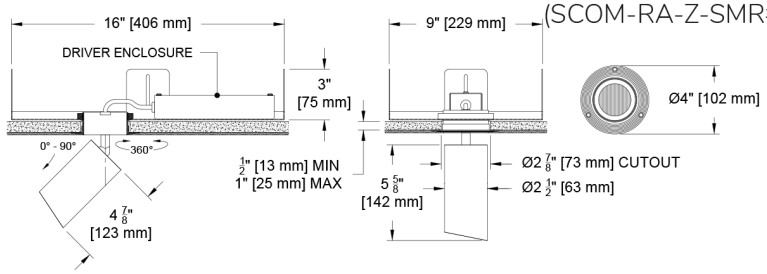

Remote Driver Box | for E1, E2, E3, C1, C2, TR2

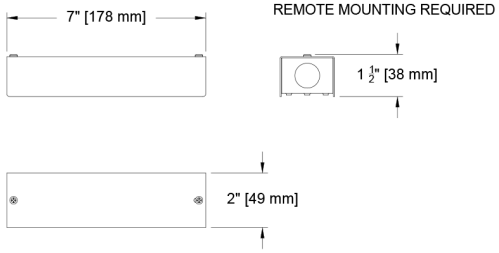


Remote Driver Box | for E4, LD

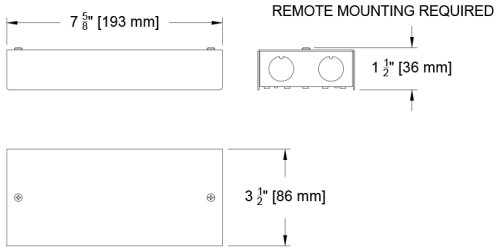


Flanged Monopoint (Integral Driver) | Flanged Surface Mount (SMR) Bracket Pan (#BP)

(SCOM-RA-F-SMR#BP-)

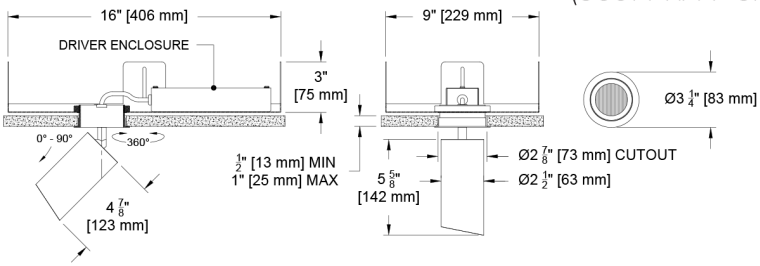


Flangeless Monopoint (Integral Driver) | Panel Mount (PMR) Bracket Pan (#BP)


(SCOM-RA-Z-PMR#BP-)

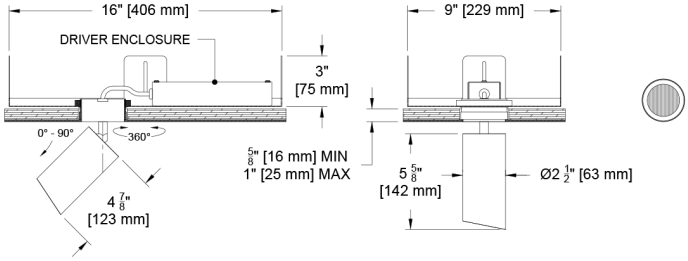


Panel Mount Detail

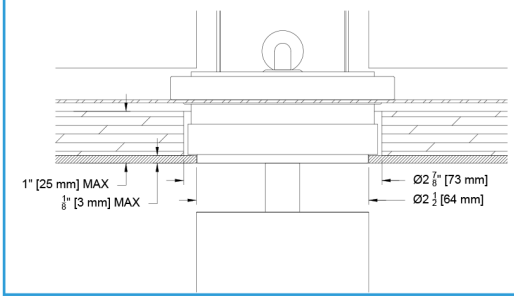

Bracklet Pan Detail | BP

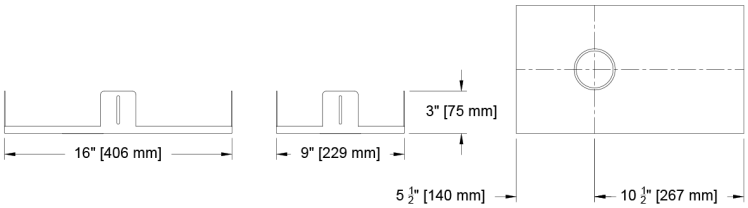

Bracket Pan Mounting Detail

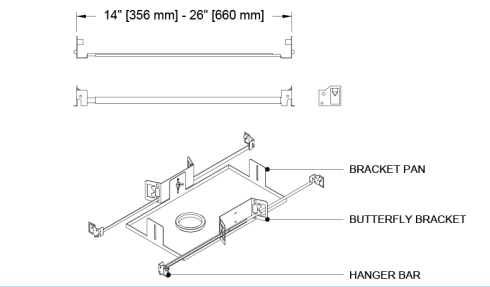


© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:48 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Integral Driver Detail

J-Box Configurations by Driver Type

Integral Driver J-Box Configuration | E1, E2, E3, C1, C2 Drivers

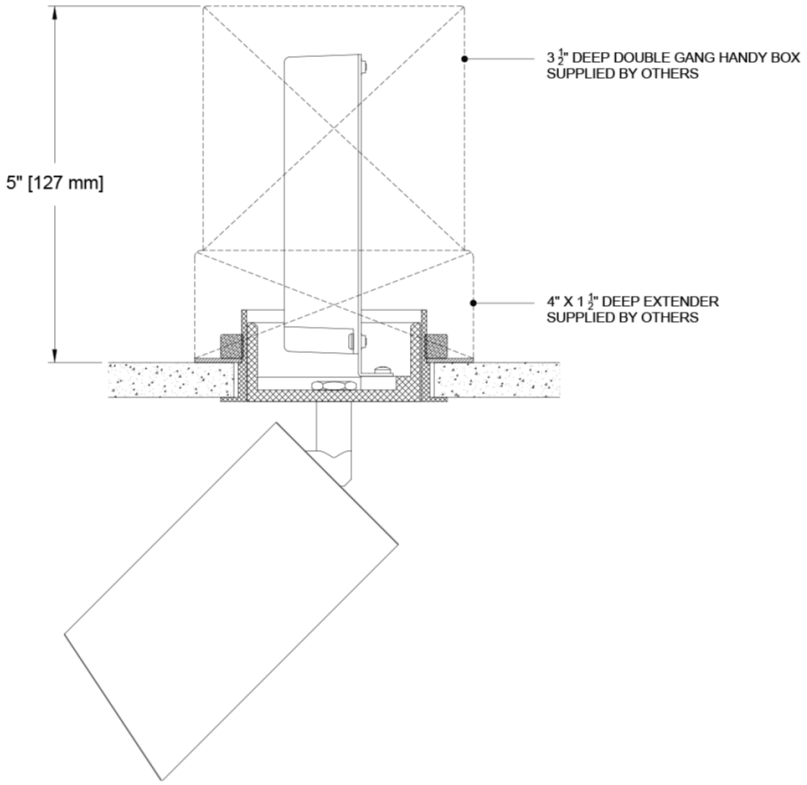

© 2026 Specialty Lighting Industries


Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971


Color Data


All data below are delivered lumens. Color and flux information based on goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer data range as listed on their datasheet.


Citizen Source C14, C20


- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1







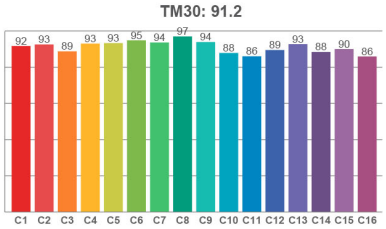

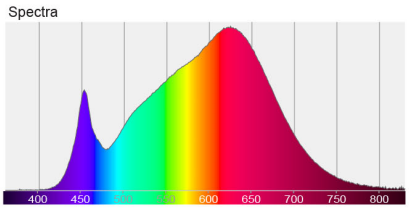







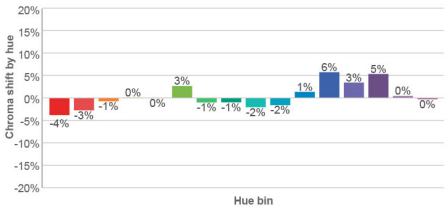

Ambient Dim Source A14 (AD - 3000k to 1900k)

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

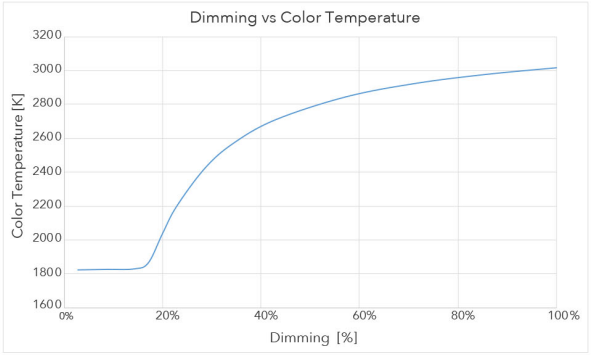

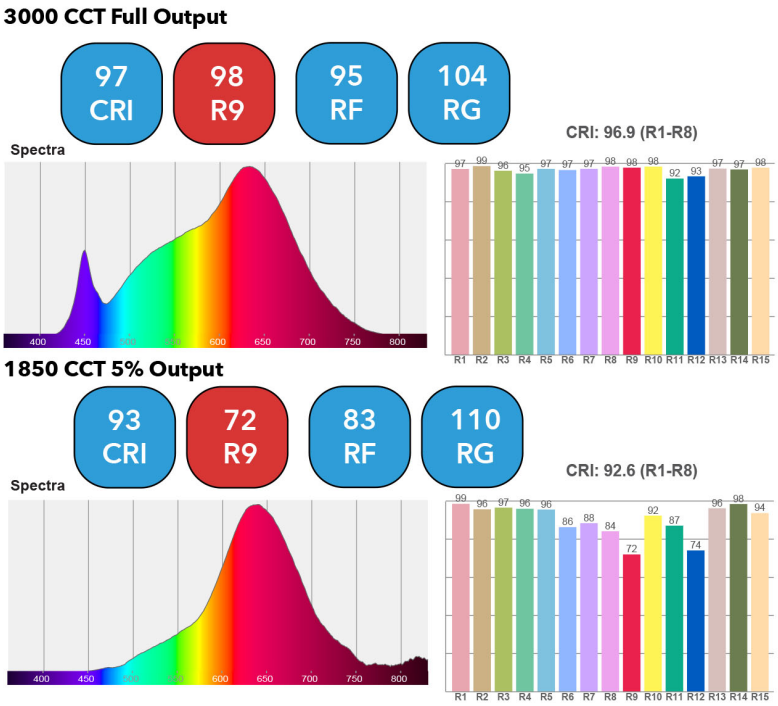


© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:48 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Tunable White source T9 - CCT 1840 (1800k to 4000k)


- <3 MacAdam Ellipse (<3 SDCM)
- 94 CRI average across all CCTs
- 76 R9 average across all CCTs
- Available in both wired or wireless control

	TUNABLE WHITE - 1800-4000K						
Color Temp	1800	2200	2500	2700	3000	3500	4000
System Watts	10	10	10	10	10	10	10
Delivered Lumens	360	412	445	467	513	543	543
Luminaire Efficiency	36	41	44	46	51	54	54
Flux and Color data based on 20° measurement at 2700k. All other values are extroplated from actual and analytical tests.							


Spectral Power Distributions at all listed CCTs available upon request

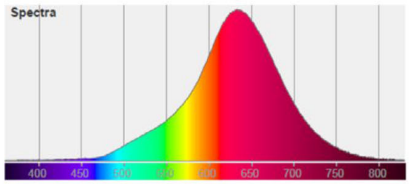

1800K

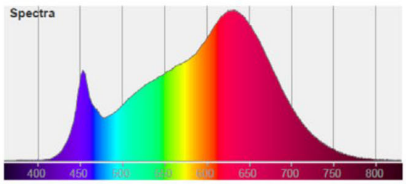


3000K

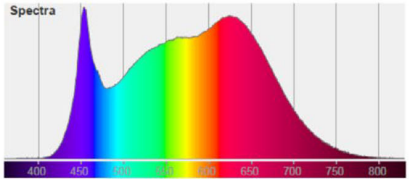

4000K

94 CRI | 76 R9 | 89 RF | 97 RG

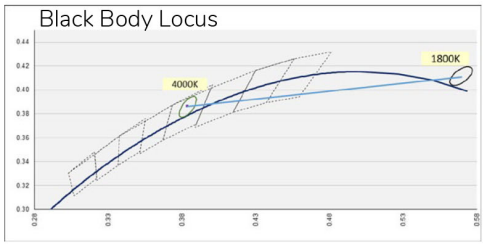




Tunable White source T9 - CCT 2765 (2700k to 6500k)


- <3 MacAdam Ellipse (<3 SDCM)
- 94 CRI average across all CCTs
- 96 R9 average across all CCTs
- Available in both wired or wireless control

	TUNABLE WHITE - 2700-6500K								
Color Temp	2700	3000	3500	4000	4500	5000	5500	6000	6500
System Watts	10	10	10	10	10	10	10	10	10
Delivered Lumens	552	569	587	574	587	586	585	584	590
Luminaire Efficiency	56	58	60	59	60	60	60	60	60
Flux and Color data based on 20° measurement at 4500k. All other values are extroplated from actual and analytical tests.									


Spectral Power Distributions at all listed CCTs available upon request

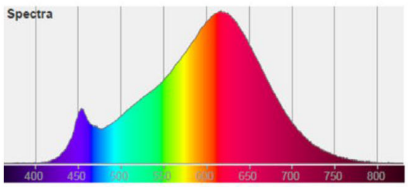

2700K

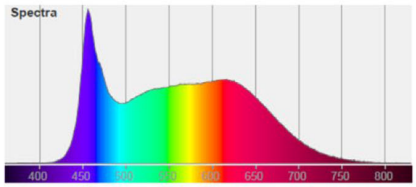


5000K

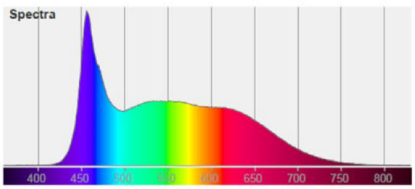

6500K

96 CRI | 76 R9 | 91 RF | 99 RG

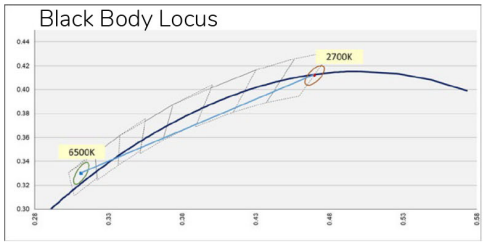



© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:48 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971