


The Slice Family

The Slice Combo pairs a diffuse general source with a punchy, directional downlight in a single fixture. As part of the Slice family, it is offered in linear 1" and 2" wide profiles in recessed, surface and pendant options. This 1" recessed fixture combines the Multicell and Lensed fixtures to allow an almost infinite number of design options. We have defined a series of standard offerings within this datasheet, but expect that you will want to modify the configurations for your project needs. Please take heed of the design criteria for minimum sizes. For more detail on the lens or multicell sections please refer to the datasheets (SL1DC-LFRC or SL1DC-MCFRC). The Slice Combo can be used to illuminate your space with precision.

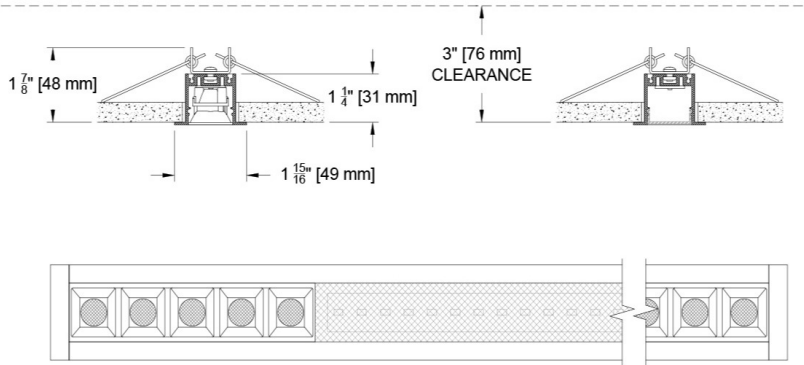

PROJECT: TYPE:  
SPECIFIER: DATE:

Key Points (SL1DC-CBRC)  
Source / Optics

- Lensed - Even illumination with wide (~100°) lambertian distribution.
- Lensed - Even illumination with wide (~100°) lambertian distribution.
- Multicell - Up to 1700 Lumens/foot
- 3 beam spreads - 15°, 30° and 45°
- 57/63+ lumens per watt/foot (multicell/lensed respectively).
- Multicell - Ultra low glare with UGR values <10.
- <3 MacAdam Steps (<3 SDCM).
- CCT offerings - 2700k, 3000k, 3500k and 4000k.
- 90+ CRI and 50+ R9
- Supports CA Title 24 part 6 compliance meeting JA8 requirements
- Lifetime: L70B50>55,000 hours at 40°C Ambient

Housing

- 14 available housing finishes+ custom/RAL available for flanged trims.
- Profile allows continuous runs to your desired length. thorough combinations of general illumination modules with multicell downlights using three building blocks: lensed downlights, multicell downlights and the optional made to length blank panels, for separation between modules and fillers to allow fabrication to exact lengths.
- Lengths longer than 8' are assembled in the field with engineered joiners
- Damp listed

Driver And Control

- Universal 120v to 277v.
- Remote driver mounting required.
- 0.1% dimming availalbe in 0-10 or DALI-2 protocols.
- Flicker Free to IEEE 1789-2015 (low risk to no risk).
- Universal 120v to 277v.

Lumens and Length of 5 Cell Module											
1" Slice		Length		Flux and Power (SO6)				Flux and Power (SO13)			
Modules	Cells	English (in)	Metric (mm)	Delivered Lm			System Watts	Delivered Lm			System Watts
				15°	30°	45°		15°	30°	45°	
1	5	5 5/16	135.5	352	377	369	6	679	743	728	13
Lumens per Foot for lensed sections											
1" Linear Lensed			Performance/Foot								
Source	System Watts (W/ft)	Delivered Lumens (lm/ft)	Lumens/Watt (ft)	Peak cd							
F4	5	317	66	125							
F8	10	633	66	215							

Refer to Photometric page for lumens/ft values

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: SL1DC-CBRC-AF-8A-SO13/F8-30-45-SY1-WH



FIXTURE	MOUNTING	CONFIGURATION	SOURCE / WATTS	CCT	BEAM	DRIVER / CONTROL	HOUSING FINISH	ACCESSORIES
SL1DC-CBRC								
Slice 1" Continuous Linear Recessed Combination Downlight	Flanged Housings AF ●● Flanged Airtight/IC	4A 4ft (nominal) 5 cell ends - 3' lens center  5A 5ft (nominal) 5 cell ends - 4' lens center  6A 6ft (nominal) 5 cell ends - 5' lens center  8A 8ft (nominal) 5 cell ends - 7' lens center  8B 8ft (nominal) 5 cell ends and center - two 3' lens sections  CST Custom Submit sketch/ dwg of desired configuration and fixture length. 10 cell minimum for Multicell. 1ft minimum for lens section. 3ft minimum overall length. Insert any blank lengths as desired. Refer to Slice 1" Multicell and Lens datasheets for more information.  Lengths > 96" are shipped in 96" sections and assembled with engineered joiner	Multicell SO6 ●● 12W/ft * 876Lm/ft * 90+CRI, 50+R9 Specialty Board  SO13 ●● 26W/ft 1714Lm/ft * 90+CRI, 50+R9 Specialty Board  Lens F4 5W 703Lm 90+CRI, 50+R9 values per foot  F8 10W 1363Lm 90+CRI, 50+R9 values per foot  *Extrapolated from 5 cell (5.25") 30" module. Refer to photometric table for more exact power and lumen data  ●● Supports CA T24 part 6 compliance meeting JA8 requirements	27 2700K  30 3000K  35 3500K  40 4000K	15 Spot  30 Narrow Flood  45 Flood	SY1 0-10 1.0%, UNV (120-277V) linear  SY2 0-10* 1.0%, UNV (120-277V) log  EldoLED  E1 0-10 0.1%, UNV (120-277V) log  E2 DALI-2 0.1%, UNV (120-277V) log  E3 0-10 0.1%, UNV (120-277V) linear  *Log dimming curve available on >=15 cell selection  Note: Remote driver required for all fixture lengths. See Electrical Guide for wire run distances  ELECTRICAL GUIDE LINK	Standard B Black Paint  Optional W White Paint  PXX Specialty Paint Color* P01-P15  C Custom/RAL*  Note: Baffle is black only *See Finish Guide  FINISH GUIDE LINK	EM Emergency Pack  CP Chicago Plenum

# Fixture Lengths and Design Criteria

Standard and Custom

Standard defined lengths and configurations are shown below. Using the basic building blocks of celled modules, lensed modules and blank panels, custom continuous runs are available using the following design criteria: minimum of two 5 cell modules at any location within a specified run; minimum 1ft length of lensed section at any location within a specified run; blank panels of any length greater than 1/2" permitted; and minimum overall length > 3ft.

## SL1DC-CBRC - Standard Modular Configurations (5 cell runs)

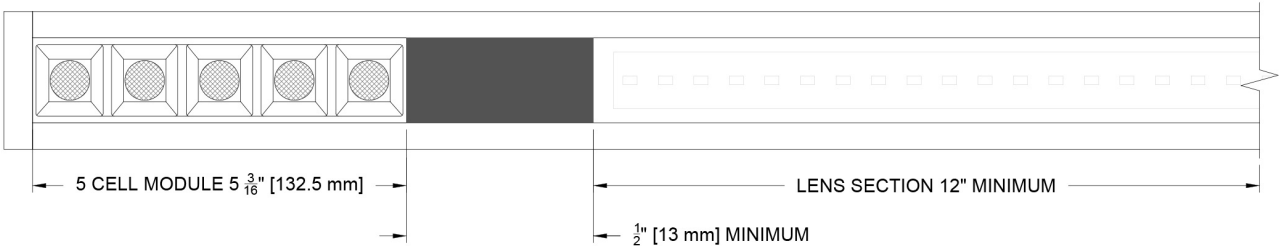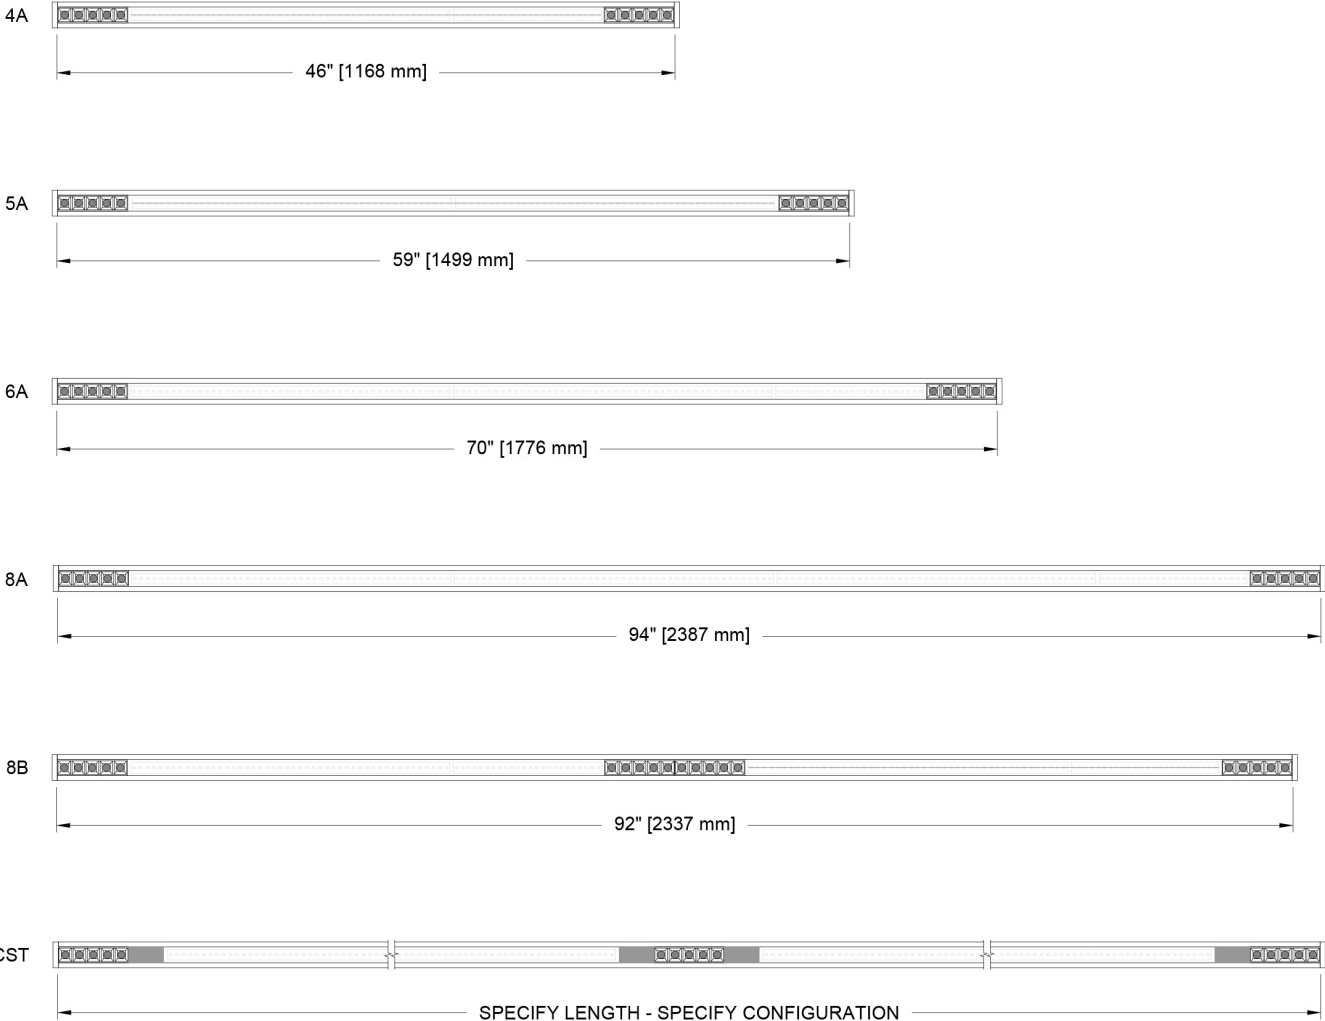


# Ceiling Cutouts and Dimensions

Furnish layouts of any non-standard runs for the purpose of submittal drawings which require approval prior to fabrication.

SL1DC-CBRC - Recessed Flanged


AF

(SL1DC-CBRC-AF)

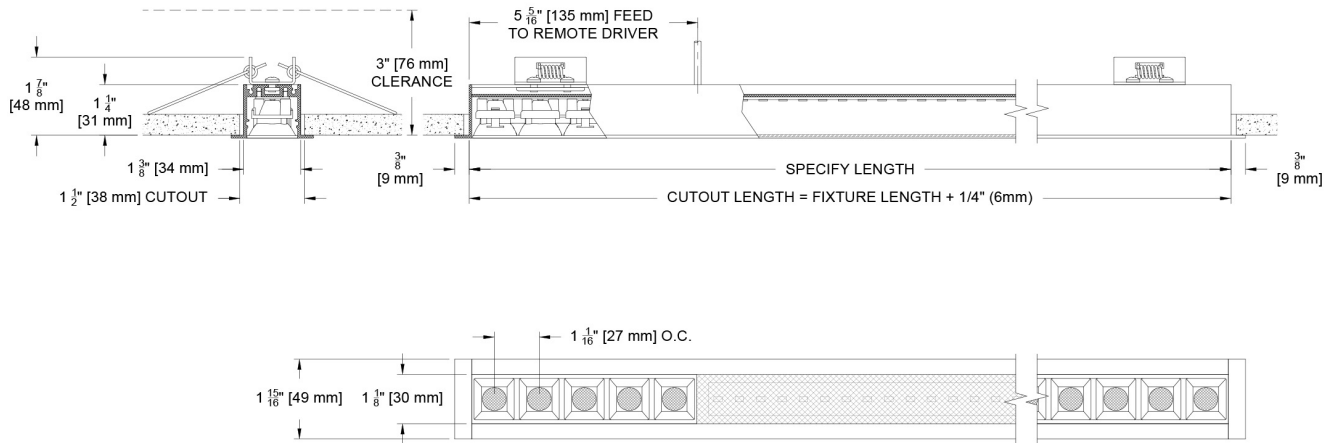


## Remote Driver Enclosure

REMOTE MOUNTING REQUIRED

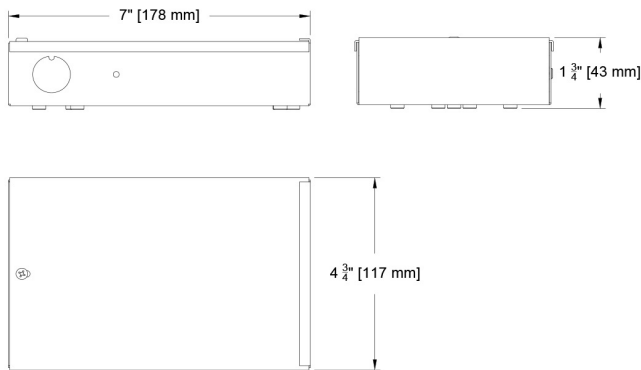




REMOTE MOUNTING REQUIRED

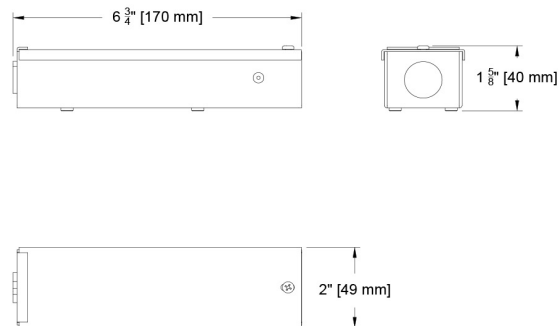

\* Note: Small driver enclosures is for use with a pair of 5 cell multicell units. For quantities greater than two 5 cell multicell units, the larger enclosure is used. Larger enclosure is used for lensed sections.


Photometric Table

Values are delivered lumens based on a 5-cell module at 5.21" (5 1/4") (132.5mm) and extrapolated for per foot numbers or 1 foot of lensed section. CAUTION: IES FILES ARE FOR A 5 CELL MODULE. CALCULATIONS MUST PLACE THE 5 CELL MODULE FILE 5.21" (132.5mm) ON CENTER OR 1 FOOT LENSED SECTION AT THE APPROPRIATE LOCATION OF THE DEFINED CONFIGURATION. All data is based on goniometer measurements of production representative product. Measurements are taken at 3000 CCT with a black baffle and can vary +/- 10% from LED manufacturer rated flux range.

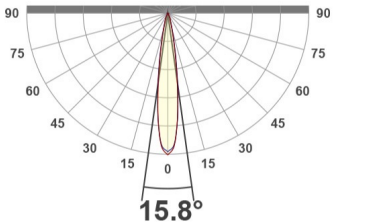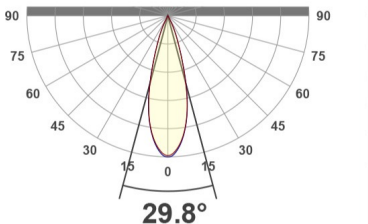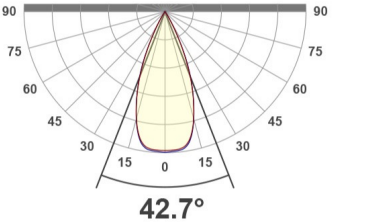Lumens per Foot Photometrics																
Multi-Cell Beamspreads		15°					30°					45°				
Source	System watts (W)	Delivered Lumens (lm/ft)	Lumens/Watt/ft	UGR	Peak (cd)	10% Field	Delivered Lumens (lm/ft)	Lumens/Watt/ft	UGR	Peak (cd)	10% Field	Delivered Lumens (lm/ft)	Lu-mens/Watt/ft	UGR	Peak (cd)	10% Field
SO6	12	803	66	4	7334	32°	876	72	3	3226	50°	868	71	7	1803	61°
SO13	26	1563	61	7	14430	31°	1714	67	4	6277	50°	1695	66	9	3521	60°
CCT Multiplier																
CCT	Citizen															
2700	0.95															
3000	1.00															
3500	1.05															
4000	1.1															
ISO CD plot based on SO13 source. UGR values are from 4H 3H row and based on per foot extrapolation.																

Lumens and Length of 5 Cell Module											
1" Slice		Length		Flux and Power (SO6)				Flux and Power (SO13)			
Modules	Cells	English (in)	Metric (mm)	Delivered Lm			System Watts	Delivered Lm			System Watts
				15°	30°	45°		15°	30°	45°	
1	5	5 5/16	135.5	352	377	369	6	679	743	728	13

Lumens per Foot for lensed sections											
1" Linear Lensed		Performance/Foot									
Source	System Watts (W/ft)	Delivered Lumens (lm/ft)	Lumens/Watt (ft)		Peak cd						
F4	5	317	66		125						
F8	10	633	66		215						

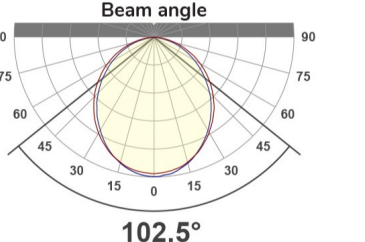Lumens per Foot Photometrics																
CCT Multiplier																
CCT	Citizen															
2700	0.96															
3000	1.00															
3500	1.03															
4000	1.04															
ISO CD plot based on F8 source.																

Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted.

Specialty Board - SO8 and SO15

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 50+R9, Hue Bin 1 and 16

