



The Slice Family

Illuminate your space with precision thin Slices of homogeneous light. The Slice family offers linear 1" and 2" wide profiles in recessed and below ceiling options in lensed and multi-cell configurations. The 1" lensed surface fixture delivers over 630 lumens per foot with a modular design allowing continuous homogenous light to your specified length. The Lambertian type distribution of ~100° is perfect as a general continuous linear illumination device. You have found the 2" lensed surface mounted Slice and we hope you enjoy the details.



| Lumens per Foot Photometrics |                      |                          |                 |         |
|------------------------------|----------------------|--------------------------|-----------------|---------|
| 1" Slice Linear Lensed       |                      | Performance / Foot       |                 |         |
| Source                       | System watts Watt/ft | Delivered Lumens (lm/ft) | Lumens/ Watt/ft | Peak cd |
| F4                           | 5                    | 317                      | 66              | 125     |
| F8                           | 10                   | 633                      | 66              | 215     |

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (SL1DC-LFSF)

Source Optics

- Up to 633 lm/ft available
- Over 65 lumens per watt per foot
-  Fixture photometrics support CA Title 24 part 6 compliance meeting requirements of JA8
- Even illumination with wide (~100°) lambertian type distribution
- 1' minimum board length. Depending on specified length, ends may have unlit area. Request submittal drawing if definition is required
- CCT offerings - 2700k, 3000k, 3500k and 4000k
- 90+ CRI and 50+ R9

Housing

- Specify to desired length for even continuous light
- 14 color options + Custom and RAL# available
- Lengths longer than 8' are assembled in field with supplied joiners
-  Damp listed

Driver And Control

- Universal 120v to 277v
- Flicker Free to IEEE 1789-2015 (no effect to low risk)
- 0.1% dimming availalbe in 0-10 or DALI-2 protocols
- Remote driver mounting required. See electrical guide for wire length guidance.

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: SL1DC-LFSF-SM-450"-F8-30-SY2-P16

| FIXTURE                                             | MOUNTING            | LENGTH                                                                                                                                                                                                                                                                                                   | SOURCE / WATTS                                                                                                                                                                                                              | CCT                                                                                             | DRIVER / CONTROL                                                                                                                                                                                                                                                                                                                                                                                                                                  | HOUSING FINISH                                                                                                                                                                                                                                                                     | ACCESSORIES          |
|-----------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| SL1DC-LFSF                                          |                     |                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                             |                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                    |                      |
| Slice 1" Continuous Linear Surface Lensed Downlight | SM<br>Surface Mount | <div>—<br/>Specify exact length in inches*^</div> <div>*Minimum board length of 12"</div> <div>^Minimum of 24 inches required for integral driver</div> <div>Note: Depending on length specified, ends may have unlit area. Please request submittal drawing if unlit area definition is required.</div> | <div>F4●●<br/>5W<br/>317Lm<br/>90+CRI, 50+R9<br/>values per foot</div> <div>F8●●<br/>10W<br/>633Lm<br/>90+CRI, 50+R9<br/>values per foot</div> <div>●●Supports CA Title 24 part 6 compliance meeting JA8 requirements</div> | <div>27<br/>2700K</div> <div>30<br/>3000K</div> <div>35<br/>3500K</div> <div>40<br/>4000K</div> | <div>SY1<br/>0-10<br/>1.0%, UNV (120-277V)<br/>linear</div> <div>SY2<br/>0-10<br/>1.0%, UNV (120-277V)<br/>log</div> <div>EldoLED</div> <div>E1<br/>0-10<br/>0.1%, UNV (120-277V)<br/>log</div> <div>E2<br/>DALI-2<br/>0.1%, UNV (120-277V)<br/>log</div> <div>E3<br/>0-10<br/>0.1%, UNV (120-277V)<br/>linear</div> <div>Note: Remote mounting required. See electrical guide for remote wiring distances</div> <div>ELECTRICAL GUIDE LINK</div> | <div>Standard</div> <div>B<br/>Black Paint</div> <div>Optional</div> <div>W<br/>White Paint</div> <div>PXX<br/>Specialty Paint Color*</div> <div>P01-P15</div> <div>W<br/>White Paint</div> <div>C<br/>Custom/RAL*</div> <div>*See Finish Guide</div> <div>FINISH GUIDE LINK</div> | CP<br>Chicago Plenum |


Ceiling Cutouts and Dimensions

Minimum 2' length. Minimum board length of 12". Depending on length specified, ends may have unlit area. Request submittal drawing if unlit end area definition is required.

SL1DC - Lensed Surface Mount


SM

(SL1DC-LFSF-)

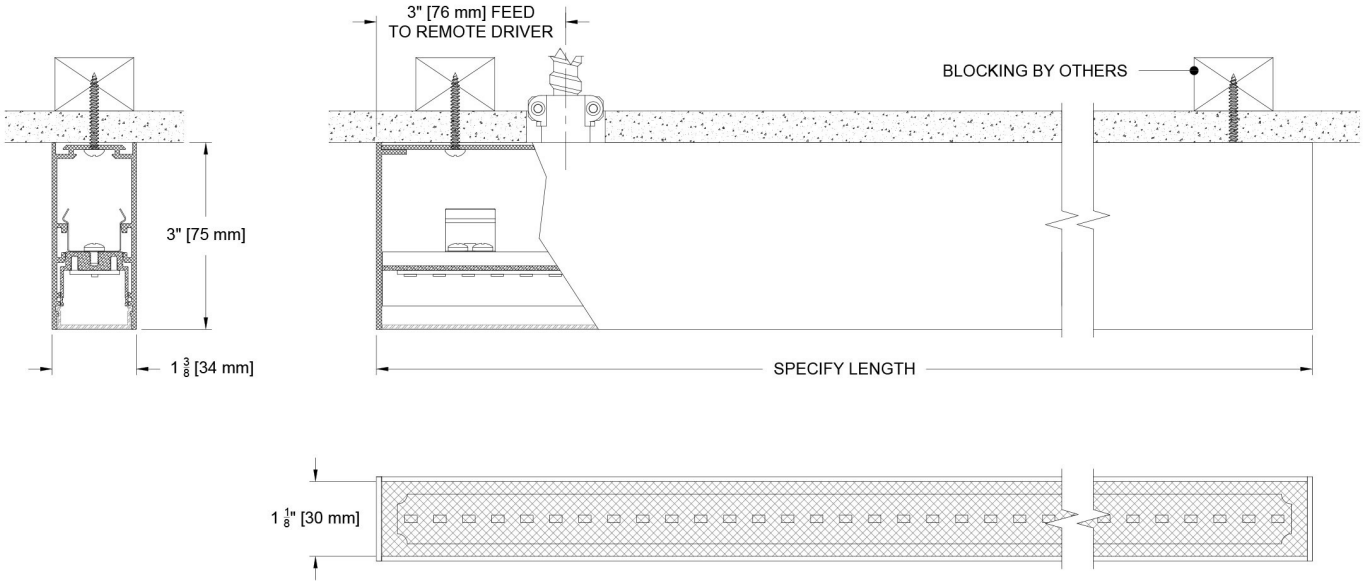


Remote Driver Enclosure

REMOTE MOUNTING REQUIRED

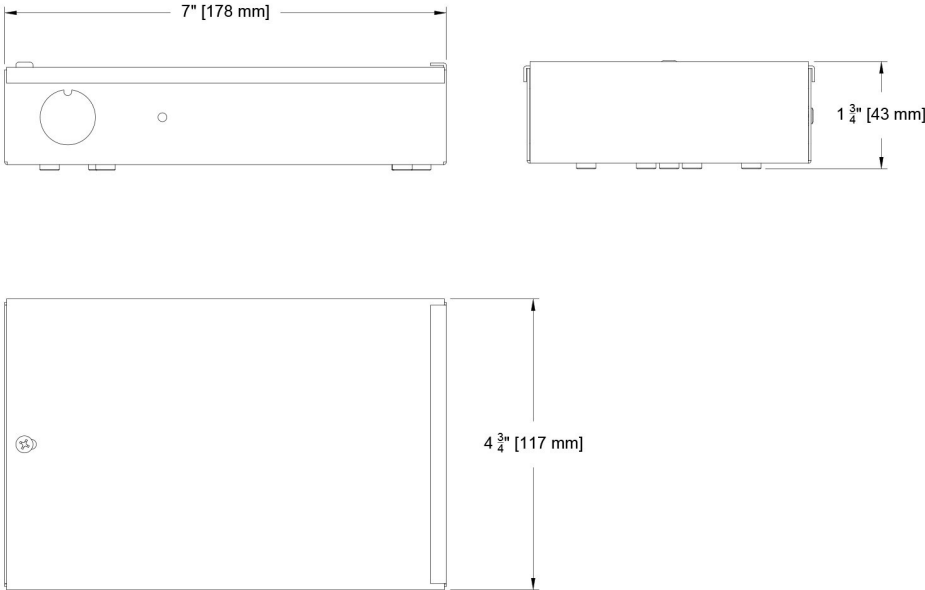

Photometric Table

Values are per foot. All flux measurements are delivered lumens based on 3000K and 1' (ft) length from production representative product. Flux can vary +/- 10% from source manufacturers rated flux range. Measurements taken with standard lens in a black housing. System watts are based typical source datasheet power values + 20% driver losses. Efficacy values will vary based on length and driver load.

| Lumens per Foot Photometrics    |                      |                                                                                                                           |                 |         |
|---------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| 1" Slice Linear Lensed          |                      | Performance / Foot                                                                                                        |                 |         |
| Source                          | System watts Watt/ft | Delivered Lumens (lm/ft)                                                                                                  | Lumens/ Watt/ft | Peak cd |
| F4                              | 5                    | 317                                                                                                                       | 66              | 125     |
| F8                              | 10                   | 633                                                                                                                       | 66              | 215     |
| CCT Multiplier                  |                      | <div>Beam angle</div>  <div>102.5°</div> |                 |         |
| CCT                             | Citizen              |                                                                                                                           |                 |         |
| 2700                            | 0.96                 |                                                                                                                           |                 |         |
| 3000                            | 1.00                 |                                                                                                                           |                 |         |
| 3500                            | 1.03                 |                                                                                                                           |                 |         |
| 4000                            | 1.04                 |                                                                                                                           |                 |         |
| ISO CD plot based on F8 source. |                      |                                                                                                                           |                 |         |

Color Data

All data is based from goniometer measurements of production representative product. All color values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted.

F8 and F4 Linear Board

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 50+R9, Hue Bin 1 and 16

