The Slice Family

Illuminate your space with precision Slices of glare free light. The Slice family offers linear 1” and 2” wide profiles in recessed and surface options. The 1” surface delivers over 1700 lumens per foot with a modular design allowing continuous light of 1” square cells to your specified length. The unobtrusive fixture features incredibly low glare values (UGR) ≥10. With multiple CCTs, 2 outputs and 3 beam options, the slice 1” packs a bunch in a small footprint.

PROJECT: TYPE:

SPECIFIER: DATE:





Key Points (SL1DC-MCFSF)

Trim

- 1" cells arrayed in 5 cell increments up to your specified length
- 14 available housing finishes+ custom/RAL available

Source / Optics

- Up to 1700 Lumens/foot
- 3 beam spreads - 15°, 30° and 45°
- 60+ lumens per watt/foot
- Ultra low glare with UGR values <10
- <3 MacAdam Steps (<3 SDCM)
- CCT offerings - 2700k, 3000k, 3500k
- 90+ CRI and 50+ R9
- TITLE 24 Supports CA Title 24 part 6 compliance meeting JA8 requirements

Housing

- Profile allows continuous light from 5 1/4" to your desired length in 5 cell increments.
- Lengths longer than 8' are assembled in the field with engineered joiners
- Damp listed

Driver And Control

- Remote driver mounting required
- 0.1% dimming availalbe in 0-10 or DALI-2 protocols
- Flicker Free to IEEE 1789-2015 (low risk to no risk)
- Universal 120v to 277v

Slice 1” Multicell Linear Downlight - S06 (6 Watt System)						
1” Slice		Length		Delivered Lumens		
Modules	Cells	US (in)	Metric (mm)	15°	30°	45°
N/A	1	1.1	27.1	98.5	109	104.8
1	5	5	136	493	542	523
2	10	11	271	985	1090	1048
3	15	16	407	1478	1635	1572
Slice 1” Multicell Linear Downlight - S011 (11 Watt System)						
Modules	Cells	US (in)	Metric (mm)	15°	30°	45°
N/A	1	1.1	27.1	133.7	147.6	146.7
1	5	5	136	669	749	736
2	10	11	271	1337	1476	1467
3	15	16	407	2006	2214	2201

© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:42 PM.
These specifications are subject to change without notice.
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: SL1DC-MCFSF-SM-30-SO11-30-45-SY1-P16

FIXTURE	MOUNTING	CELLS	LUMENS / WATTS	CCT	BEAM	DRIVER / CONTROL	HOUSING FINISH
SL1DC-MCFSF							
Slice 1" Continuous Linear Surface Multicell Downlight	SM Surface Mount	5 5 3/8" (136.5mm) 10 10 9/16" (269mm) 15 15 13/16" (401.5mm) 20 21" (534mm) 25 26 1/4" (666.5mm) 30 31 7/16 (799mm) 35 36 11/16" (931.5mm) 40 41 7/8" (1064mm) -- specify total # of cells in 5 cell increments if over 40 cells^ ^ Lengths > 96" are shipped in 96" sections and assembled with engineered joiner	SO6 12W/ft 542Lm/ft* 90+CRI, 50+R9 Specialty Board SO11 22W/ft 749Lm/ft* 90+CRI, 50+R9 Specialty Board *Delivered Lumens based on tests performed at 3000K w/ 30° beam angle Supports CA T24 part 6 compliance meeting JA8 requirements	27 2700K 30 3000K 35 3500K	15 Spot 30 Narrow Flood 45 Flood	SY1 0-10 1.0%, UNV (120-277V) linear SY2 0-10* 1.0%, UNV (120-277V) log E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear *Log dimming curve available on >=15 cell selection Note: Remote driver required for all fixture lengths. See Electrical Guide for wire run distances ELECTRICAL GUIDE LINK	Standard B Black Paint Optional W White Paint PXX Specialty Paint Color* P01-P15 C Custom/RAL* Note: Baffle is black only *See Finish Guide FINISH GUIDE LINK

© 2026 Specialty Lighting Industries

NOTE: Last Updated on Wed, Oct 21, 2026 4:42 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Fixture Lengths

Standard lengths are shown below. Longer continuous runs are available. Simply specify the total number of cells, in 5 cell increments, for lengths longer than 40 cells. Fixture length = number of 5 cell modules x 132.5mm (module length) + 4mm for end caps.

SL1DC- Standard Modular Configurations (5 cell runs)

(SL1DC-MCFSF)

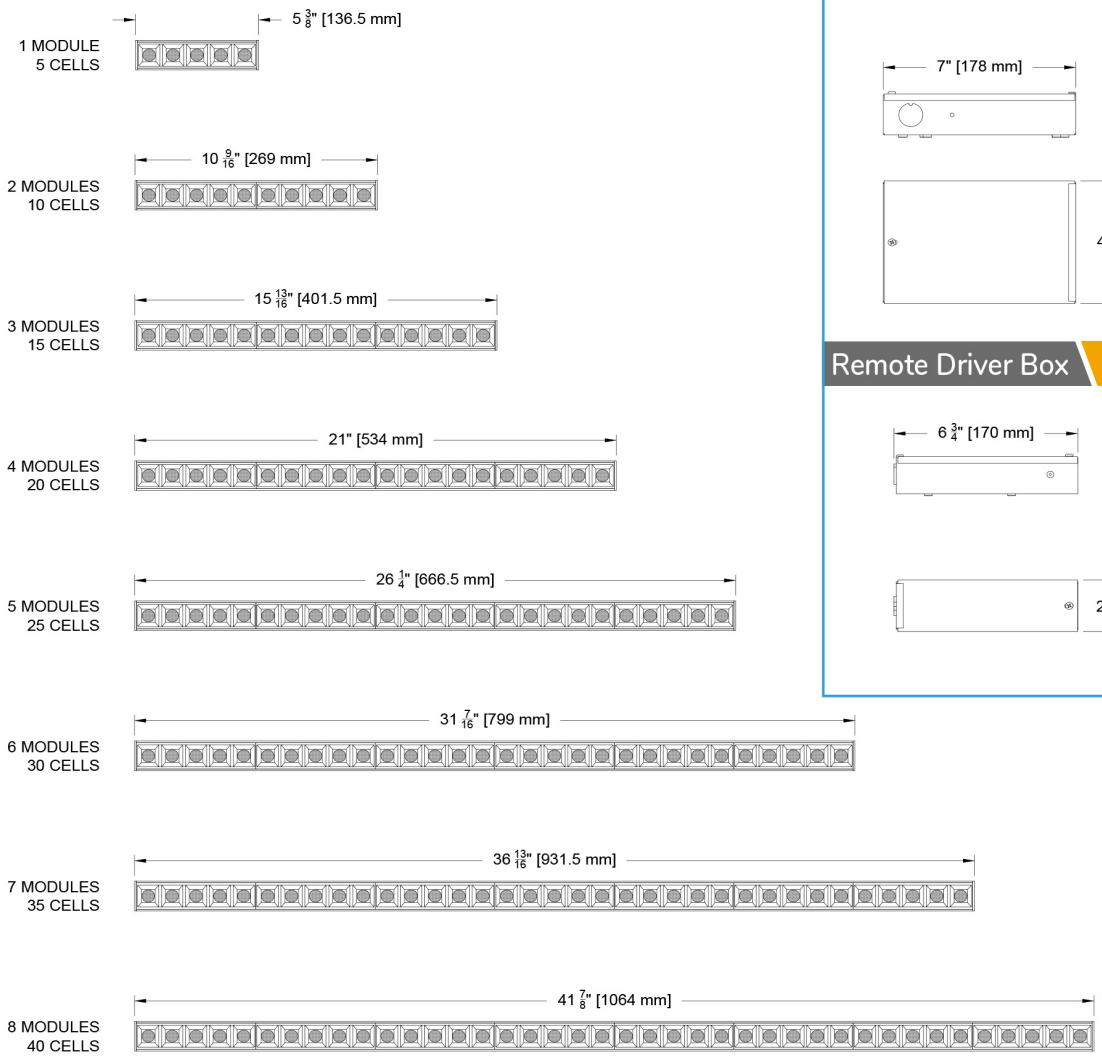

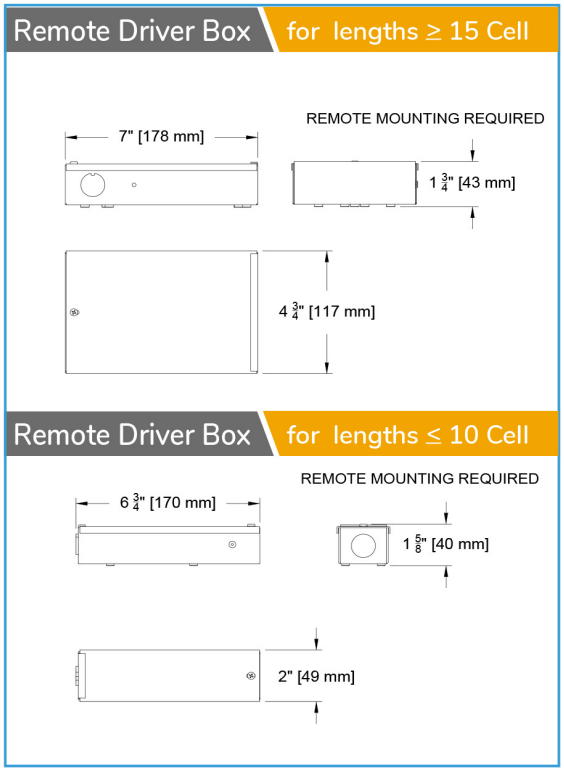

© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:42 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Ceiling Cutouts and Dimensions

For lengths over 40 cells a submittal drawing is required.

SL1DC- Surface Mount Multicell Housing SM

(SL1DC-MCFSF-)

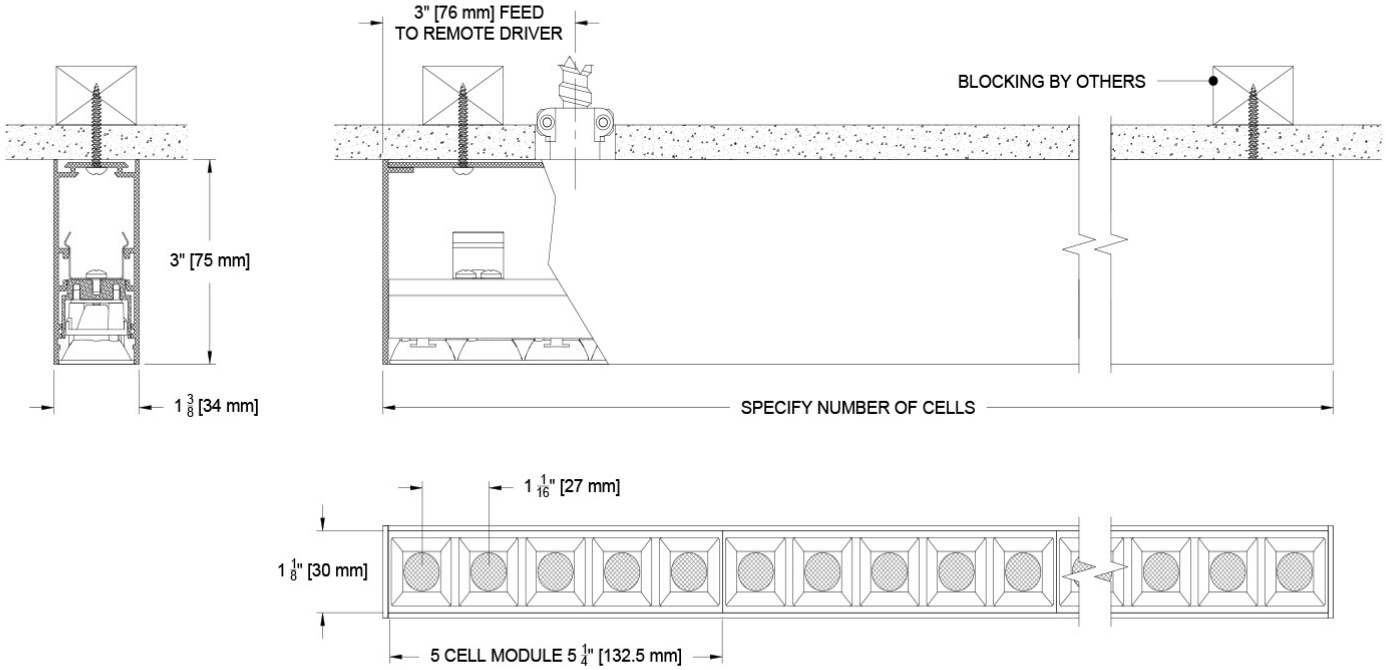

© 2026 Specialty Lighting Industries
NOTE: Last Updated on Wed, Oct 21, 2026 4:42 PM.
These specifications are subject to change without notice.
Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Photometric Table

Values and files shown are based on delivered lumens and system watts for a 5-cell module at 5.25" (133 mm). Data for 10-cell and 15-cell modules can be approximated by multiplying by 2 or 3, respectively. All data is based on goniometer measurements of production-representative product at 3000K CCT with a black baffle, and may vary by ±10% from the LED manufacturer's rated flux range.

Slice 1" Multicell Linear Downlight - S06 (6 Watt System)

1" Slice		Length		Delivered Lumens		
Modules	Cells	US (in)	Metric (mm)	15°	30°	45°
N/A	1	1.1	27.1	98.5	109	104.8
1	5	5	136	493	542	523
2	10	11	271	985	1090	1048
3	15	16	407	1478	1635	1572

CCT Multiplier	
CCT	Citizen
2700	0.95
3000	1.00
3500	1.05
4000	1.1





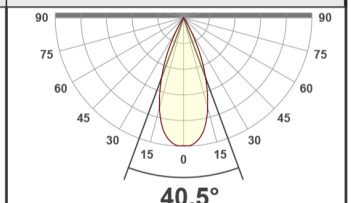

Slice 1" Multicell Linear Downlight - S011 (11 Watt System)

1" Slice		Length		Delivered Lumens		
Modules	Cells	US (in)	Metric (mm)	15°	30°	45°
N/A	1	1.1	27.1	133.7	147.6	146.7
1	5	5	136	669	749	736
2	10	11	271	1337	1476	1467
3	15	16	407	2006	2214	2201





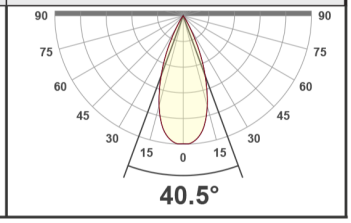

© 2026 Specialty Lighting Industries

NOTE: Last Updated on Wed, Oct 21, 2026 4:42 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted.

SO6 & SO11

SO6 - 15°

90 CRI | 50 R9 | 91 RF | 97 RG

Spectra

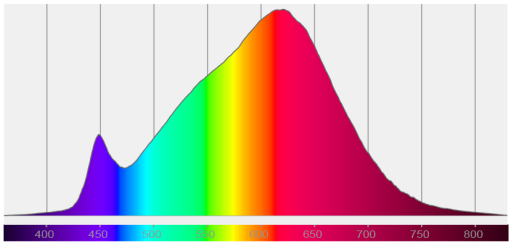

CRI: 90.4 (R1-R8)

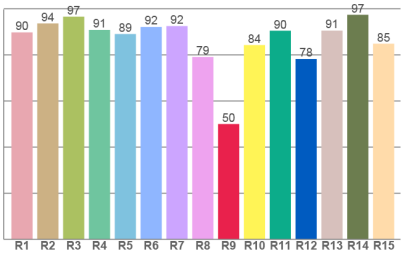

Color distortion

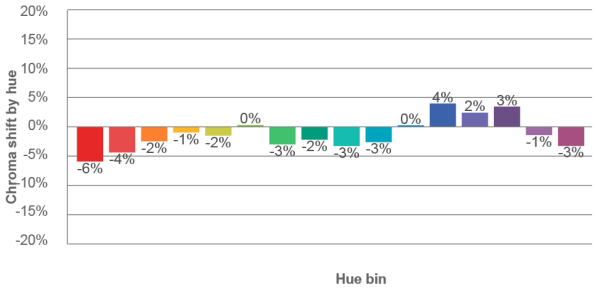

TM30: 91.5

TM-30Color

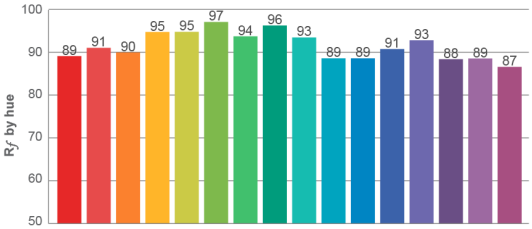



SO6 - 30°

90 CRI | 48 R9 | 91 RF | 98 RG

Spectra

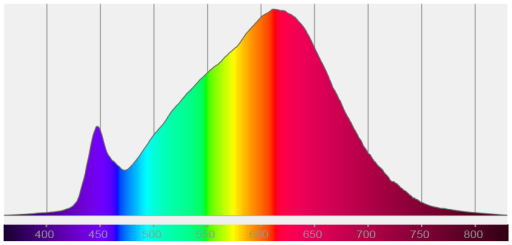

CRI: 90.0 (R1-R8)

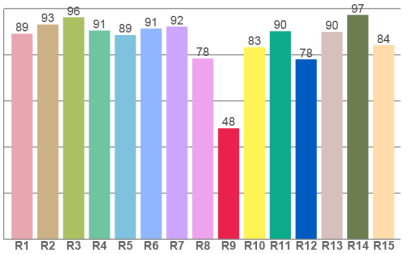

Color distortion

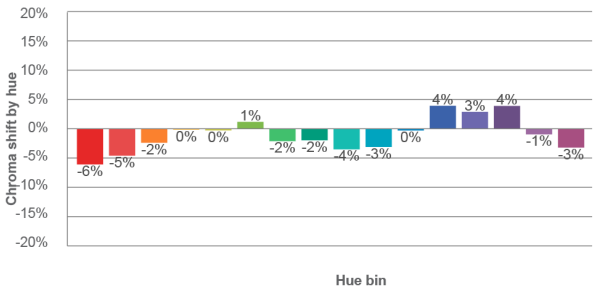

TM30: 91.3

TM-30Color

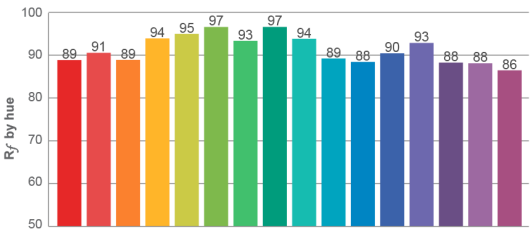



SO6 & SO11

© 2026 Specialty Lighting Industries

NOTE: Last Updated on Wed, Oct 21, 2026 4:42 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

Slice 1" Continuous Linear Multicell Downlight (34mm)

Surface linear fixture

SO6 - 45°

90 CRI | 50 R9 | 91 RF | 99 RG

Spectra

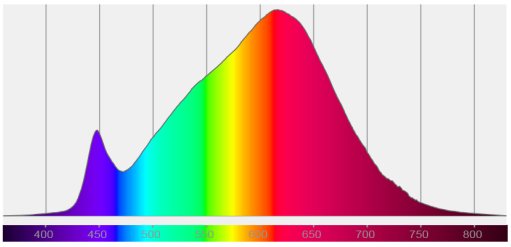

CRI: 90.3 (R1-R8)

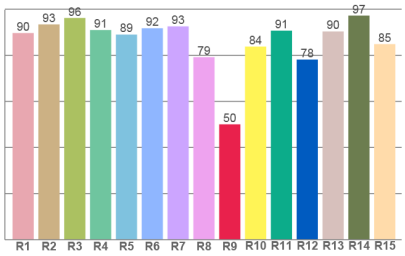

Color distortion

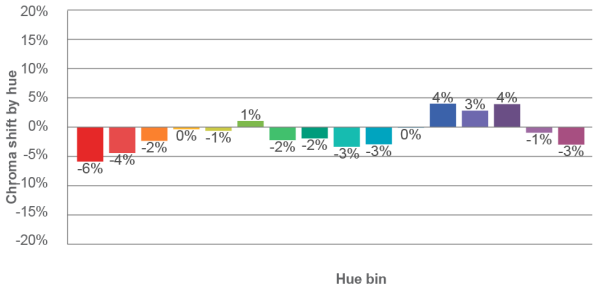

TM30: 91.5

TM-30Color

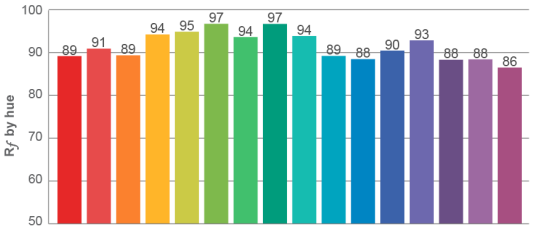



SO11 - 15°

90 CRI | 48 R9 | 91 RF | 97 RG

Spectra

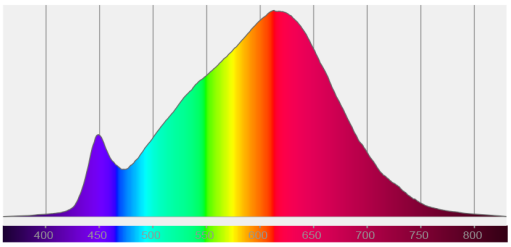

CRI: 90.0 (R1-R8)

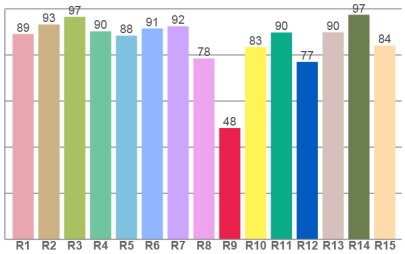

Color distortion

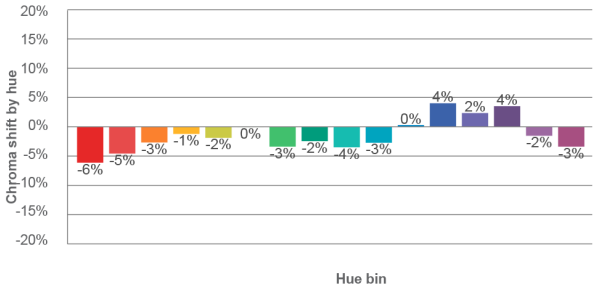

TM30: 91.2

TM-30Color

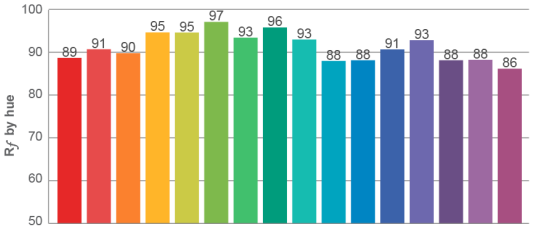



© 2026 Specialty Lighting Industries

NOTE: Last Updated on Wed, Oct 21, 2026 4:42 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971

SO6 & SO11

SO11 - 30°

89 CRI | 47 R9 | 91 RF | 98 RG

Spectra

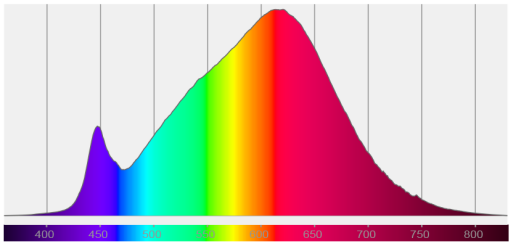

CRI: 89.6 (R1-R8)

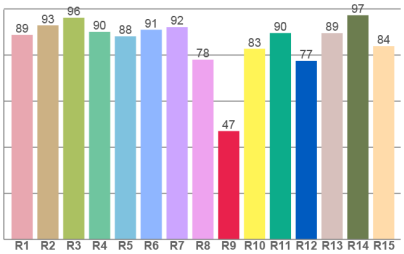

Color distortion

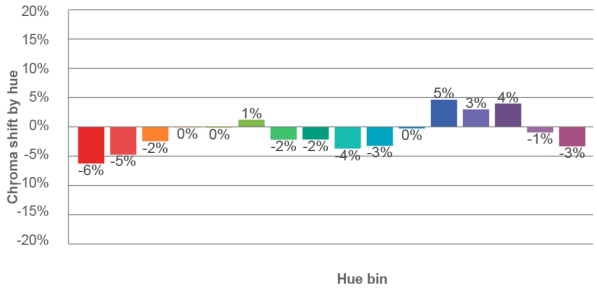

TM30: 91.1

TM-30Color

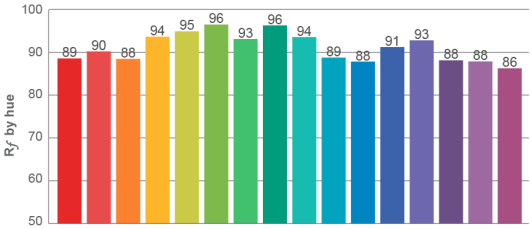



SO11 - 45°

90 CRI | 48 R9 | 91 RF | 97 RG

Spectra

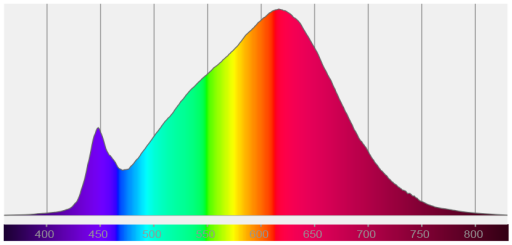

CRI: 89.9 (R1-R8)

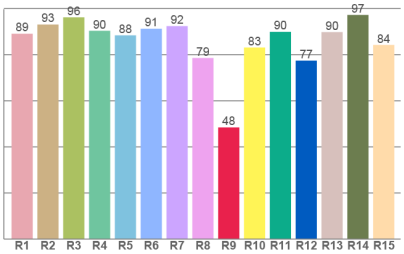

Color distortion

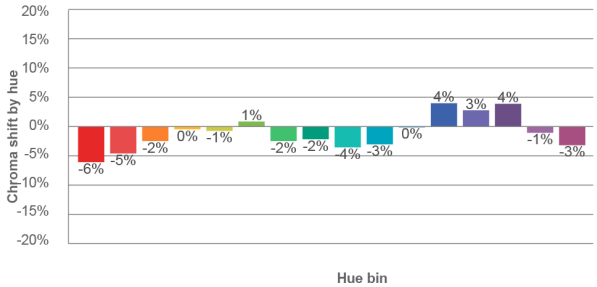

TM30: 91.3

TM-30Color

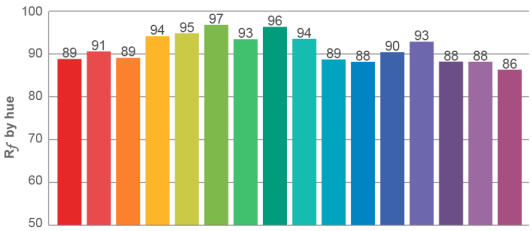



© 2026 Specialty Lighting Industries

NOTE: Last Updated on Wed, Oct 21, 2026 4:42 PM.
These specifications are subject to change without notice.

Specialty Lighting Industries
1306 Doris Ave., Ocean, NJ 07712
Tel. 732.517.0800 | Fax 732.517.0971