

The Slice Family

The Slice Combo pairs a diffuse general source with a punchy, directional downlight in a single fixture. As part of the Slice family, it is offered in linear 1" and 2" wide profiles in recessed, surface and pendant options. This offering combines the Multicell and Lensed fixtures to allow an almost infinite number of design options. We have defined a series of standard offerings within this datasheet, but expect that you will want to modify the configurations for your project needs. Please take heed of the design criteria for minimum sizes. For more detail on the lens or multicell sections please refer to the datasheets (SL2DC-LRC or SL2DC-MCRC).

PROJECT:


TYPE:

SPECIFIER:


DATE:

Key Points (SL2DC-CBRC)

Source / Optics


- Lensed - Even illumination with wide (~100°) lambertian distribution.
- Lensed - up to 790lm/ft.
- Multicell - Up to 1126 Lumens/foot.
- Multicell - 3 beam spreads - 15°, 30° and 45°.
- 70/80+ lumens per watt/foot (multicell/lensed respectively).
- Multicell - Ultra low glare with UGR values <13.
- <3 MacAdam Steps (<3 SDCM).
- CCT offerings - 2700k, 3000k, 3500k and 4000k.
- 90+ CRI and 50+ R9.
-  Supports CA Title 24 part 6 compliance meeting JA8 requirements.
- Lifetime: L70B50>55,000 hours at 40°C Ambient.

Housing

- 14 available housing finishes+ custom/RAL available for exposed flanged trims.
- Profile allows continuous runs to your desired length. thorough combinations of general illumination modules with multicell down lights using three building blocks: lensed downlights, multicell downlights and the optional made to length blank panels, for separation between modules and fillers to allow fabrication to exact lengths.
- Lengths longer than 8' are assembled in the field with supplied joiners.
-  Damp listed.

Driver And Control

- Integral Driver - remote optional.
- 0.1% dimming availalbe in 0-10 or DALI-2 protocols.
- Flicker Free to IEEE 1789-2015 (no effect to low risk).
- Universal 120v to 277v.

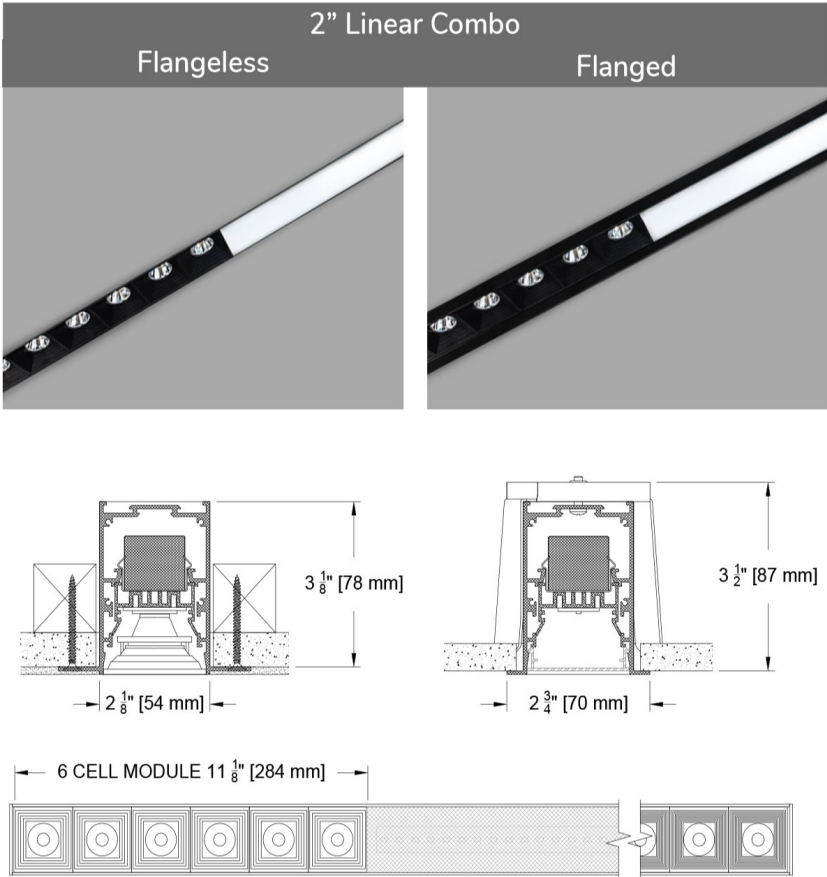

Lumens and Length of 6 Cell Module										
2" Slice		Length		Flux and Power (SO8)				Flux and Power (SO15)		
Modules	Cells	English (in)	Metric (mm)	Delivered Lm			System Watts	Delivered Lm		
				15°	30°	45°		15°	30°	45°
1	6	11 3/8	289	629	603	608	8	1062	1065	1072
										15
Lumens per Foot for lensed sections										
2" Linear Lensed			Performance/Foot							
Source		System Watts (W/ft)	Delivered Lumens (lm/ft)	Lumens/Watt (ft)		Peak cd				
F4		5	395	82		165				
F8		10	790	82		334				

Refer to Photometric page for lumens/ft values

Ordering Codes

PROJECT: _____


SPECIFIER: _____

DATE: _____

TYPE: _____

QUANTITY: _____

Ordering Code Example: SL2DC-CBRC-AP-6A-SO8/F4-30-45-SY1-2C-W



FIXTURE	MOUNTING	CONFIGURATION	SOURCE / WATTS	CCT	BEAM	DRIVER / CONTROL	CIRCUITS	HOUSING FINISH	ACCESSORIES
SL2DC-CBRC									
Slice 2" Continuous Linear Recessed Combination Downlight	Flanged Housings	4A 4ft (nominal) 6 cell ends - 2' lens center	Multicell	27 2700K	15 Spot	SY1 0-10 1.0%, UNV (120-277V) linear	1C 1 Circuit	W White Paint	EM Emergency Pack
	AF ●● Flanged Airtight/IC*	5A 5ft (nominal) 6 cell ends - 3' lens center	SO8 ●● 8W/ft 661Lm/ft* 90+CRI, 50+R9 Specialty Board	30 3000K	30 Narrow Flood	SY2 0-10 1.0%, UNV (120-277V) log	2C 2 Circuit	BLK Black	CP Chicago Plenum
	Flangeless Housings	6A 6ft (nominal) 6 cell ends - 4' lens center	SO15 ●● 16W/ft 1116Lm/ft* 90+CRI, 50+R9 Specialty Board	35 3500K	45 Flood	EldoLED			
	AP ●● Plaster IC/Airtight * Must specify housing finish for the flange	8A 8ft (nominal) 6 cell ends - 6' lens center	Lens	40 4000K	CST Custom Use this code if differing beams are required at varying locations. Define required beams and locations in sketch/drawing	E1 0-10 0.1%, UNV (120-277V) log		PXX Specialty Color (paint stocked in house - see finish chart)*	
		8B 8ft (nominal) 6 cell ends and center - two 2' lens sections	F4 5W/ft 703Lm/ft 90+CRI, 50+R9 Specialty Board			E2 DALI-2 0.1%, UNV (120-277V) log		P01-P15	
		CST Custom	F8 10W/ft 1363Lm/ft 90+CRI, 50+R9 Specialty Board			E3 0-10 0.1%, UNV (120-277V) linear		C Custom/RAL*	
		Submit sketch/dwg of desired configuration and fixture length. 12 cell minimum for Multicell. 1ft minimum for lens section. 3ft minimum overall length. Insert any blank lengths as desired. Refer to Slice 2" Multicell and Lens datasheets for more information.	Note: Select each Multicell and Lens source and separate with / for order code. i.e. SO8/F4 *Extrapolated from 6 cell (11.375")15" module. Refer to photometric table for more exact power and lumen data ●● Supports CA T24 part 6 compliance meeting JA8 requirements			Note: Integral driver - remote upon request		Note: Baffle is black only *See Finish Guide	
									

Fixture Lengths and Design Criteria

Standard and Custom

Standard defined lengths and configurations are shown below. Using the basic building blocks of celled modules, lensed modules and blank panels, custom continuous runs are available using the following design criteria: minimum of two 6 cell modules at any location within a specified run; minimum 1ft length of lensed section at any location within a specified run; blank panels of any length greater than 1/2" permitted; and minimum overall length > 3ft.


SL2DC-CRBC- Standard Configurations

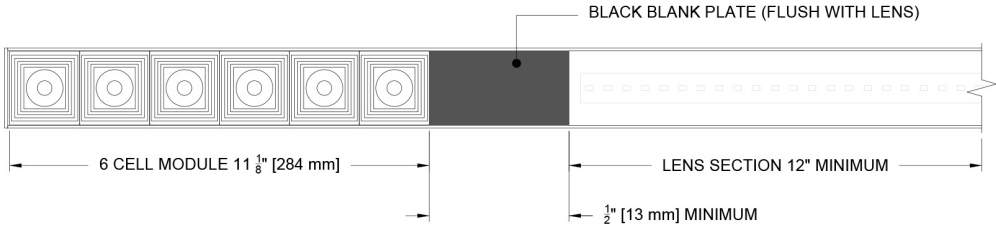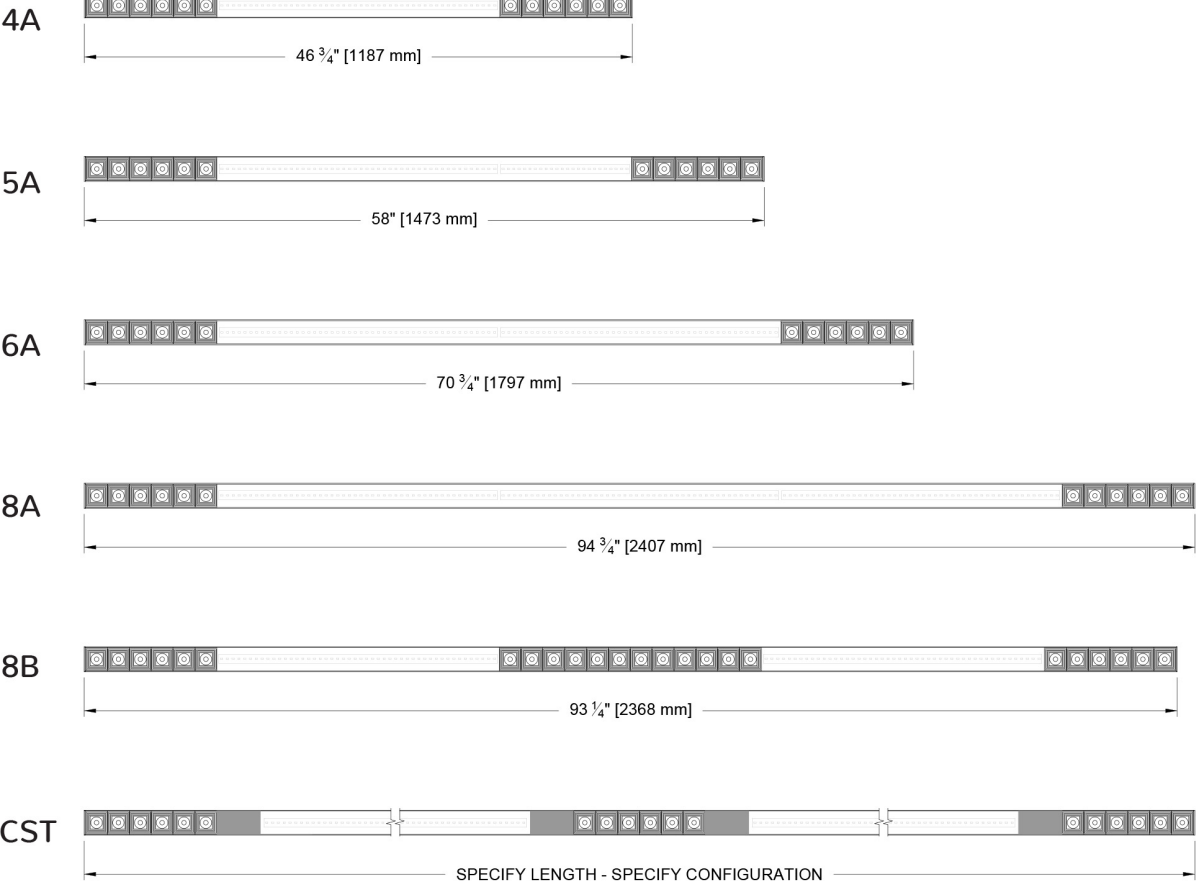


Ceiling Cutouts and Dimensions

Furnish layouts of any non-standard runs for the purpose of submittal drawings which require approval prior to fabrication.

SL2DC-CRBC - Recessed Flangeless Mount AP
(SL2DC-CRBC-AP-)



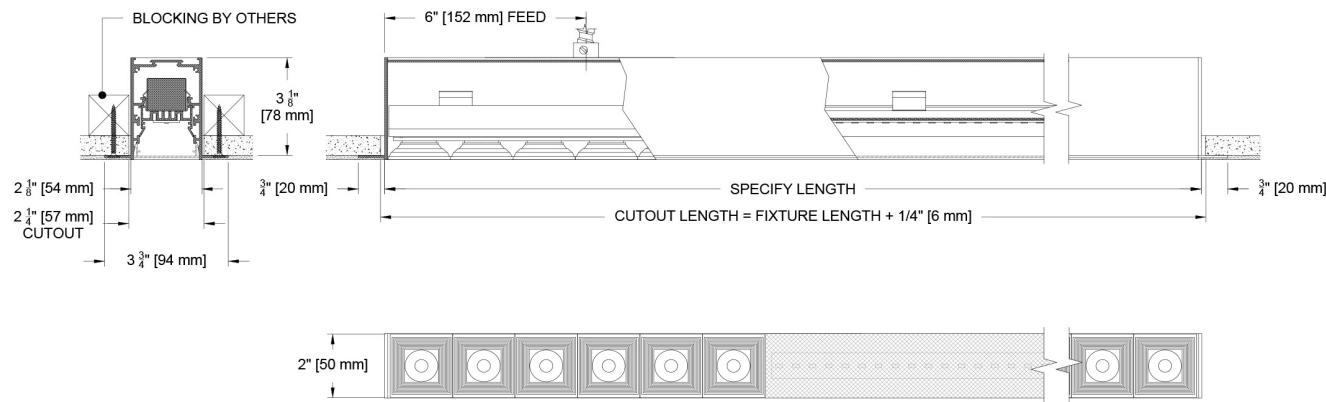


SL2DC-CRBC Recessed Flange Mount AF
(SL2DC-CRBC-AF-)

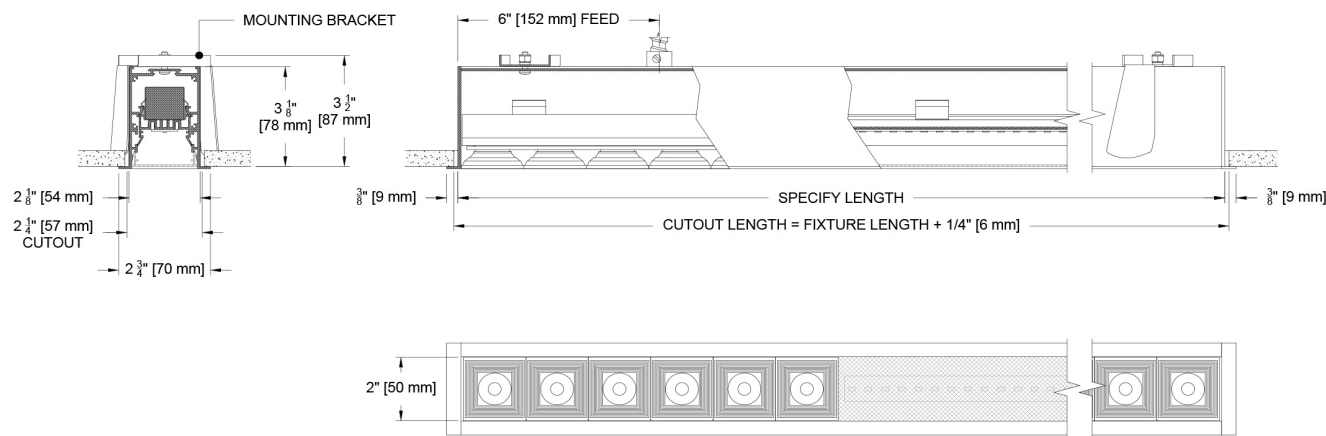


Photometric Table

Values are delivered lumens based on a 6-cell module at 11.125" (284mm) and extrapolated for per foot numbers or 1ft of lens section. CAUTION: IES FILES ARE FOR A 6 CELL MODULE or 1ft LENS SECTION. CALCULATIONS MUST PLACE THE 6 CELL MODULE FILE 11.125" (284mm) OR 1ft LENS SECTION AT THE APPROPRIATE LOCATION OF THE DEFINED CONFIGURATION. All data is based on goniometer measurements of production representative product. Measurements are taken at 3000 CCT with a black baffle and can vary +/- 10% from LED manufacturer rated flux range.

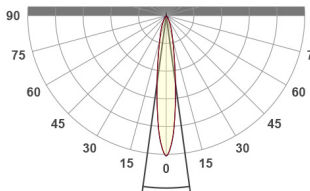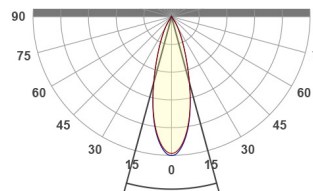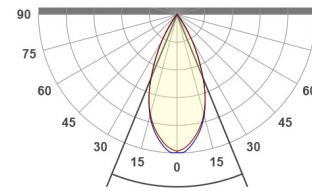Lumens per Foot Photometrics													
Multi-Cell Beamspreads		15°				30°				45°			
Source	System watts (W)	Delivered Lumens (lm/ft)	Lumens/ Watt/ft	Peak (cd)	10% Field	Delivered Lumens (lm/ft)	Lumens/ Watt/ft	Peak (cd)	10% Field	Delivered Lumens (lm/ft)	Lumens/ Watt/ft	Peak (cd)	10% Field
SO8	8	661	80	4287	42°	634	76	1893	59°	639	77	1170	69°
SO15	16	1116	70	7673	41°	1119	71	3362	59°	1126	71	2098	69°
CCT Multiplier		<div>Beam angle</div>  <div>15.6°</div>				<div>Beam angle</div>  <div>30.4°</div>				<div>Beam angle</div>  <div>44.5°</div>			
CCT	Citizen												
2700	0.95												
3000	1.00												
3500	1.05												
4000	1.1												
ISO CD plot based on SO8 source. UGR values are from 4H 3H row and based on per foot extrapolation.													

Lumens and Length of 6 Cell Module											
2" Slice		Length		Flux and Power (SO8)				Flux and Power (SO15)			
Modules	Cells	English (in)	Metric (mm)	Delivered Lm			System Watts	Delivered Lm			System Watts
				15°	30°	45°		15°	30°	45°	
1	6	11 3/8	289	629	603	608	8	1062	1065	1072	15

Lumens per Foot for lensed sections												
2" Linear Lensed			Performance/Foot									
Source		System Watts (W/ft)	Delivered Lumens (lm/ft)	Lumens/Watt (ft)		Peak cd						
F4		5	395	82		165						
F8		10	790	82		334						

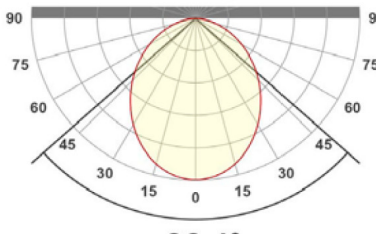CCT Multiplier		<div>Beam angle</div>  <div>96.4°</div>			
CCT	Citizen				
2700	0.96				
3000	1.00				
3500	1.03				
400	1.04				

Color Data

All data is based from goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted. (Data for Multicell board. Please see datasheet SL2DC-LSF for lensed color information.)

SO8 and SO15

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 50+R9, Hue Bin 1 and 16

