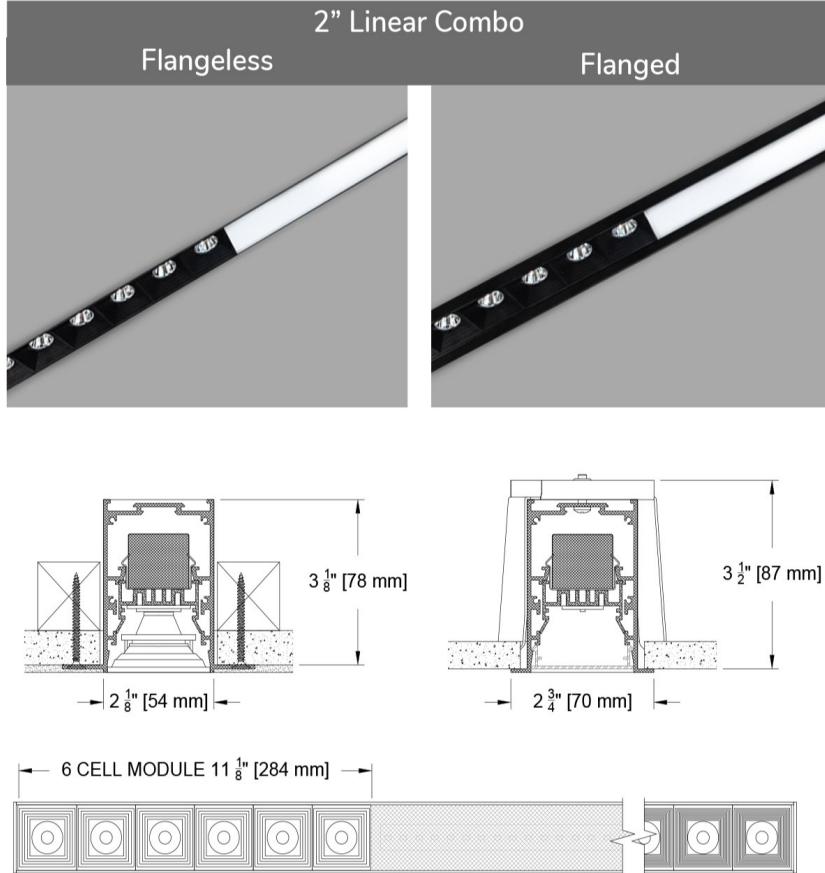


The Slice Family

The Slice Combo pairs a diffuse general source with a punchy, directional downlight in a single fixture. As part of the Slice family, it is offered in linear 1" and 2" wide profiles in recessed, surface and pendant options. This offering combines the Multicell and Lensed fixtures to allow an almost infinite number of design options. We have defined a series of standard offerings within this datasheet, but expect that you will want to modify the configurations for your project needs. Please take heed of the design criteria for minimum sizes. For more detail on the lens or multicell sections please refer to the datasheets (SL2DC-LRC or SL2DC-MCRC).



PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (SL2DC-CBRC)

Source / Optics

- Lensed - Even illumination with wide (~100°) lambertian distribution.
- Lensed - up to 790lm/ft.
- Multicell - Up to 1126 Lumens/foot.
- Multicell - 3 beam spreads - 15°, 30° and 45°.
- 70/80+ lumens per watt/foot (multicell/lensed respectively).
- Multicell - Ultra low glare with UGR values <13.
- <3 MacAdam Steps (<3 SDCM).
- CCT offerings - 2700k, 3000k, 3500k and 4000k.
- 90+ CRI and 50+ R9.
- title 24 Supports CA Title 24 part 6 compliance meeting JA8 requirements.

Housing

- 14 available housing finishes+ custom/RAL available for exposed flanged trims.
- Profile allows continuous runs to your desired length. thorough combinations of general illumination modules with multicell down lights using three building blocks: lensed downlights, multicell downlights and the optional made to length blank panels, for separation between modules and fillers to allow fabrication to exact lengths.
- Lengths longer than 8' are assembled in the field with supplied joiners.
- IC Damp listed.

Driver And Control

- Integral Driver - remote optional.
- 0.1% dimming available in 0-10 or DALI-2 protocols.
- Flicker Free to IEEE 1789-2015 (no effect to low risk).
- Universal 120v to 277v.

Lumens and Length of 6 Cell Module

2" Slice		Length		Flux and Power (SO8)				Flux and Power (SO15)			
Modules	Cells	English (in)	Metric (mm)	Delivered Lm			System Watts	Delivered Lm			System Watts
				15°	30°	45°		15°	30°	45°	
1	6	11 3/8	289	629	603	608	8	1062	1065	1072	15
Lumens per Foot for lensed sections											
2" Linear Lensed				Performance/Foot							
Source		System Watts (W/ft)		Delivered Lumens (lm/ft)		Lumens/Watt (ft)		Peak cd			
F4		5		395		82		165			
F8		10		790		82		334			

Refer to Photometric page for lumens/ft values

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: SL2DC-CBRC-AP-6A-SO8/F4-30-45-SY1-2C-W

Fixture	Mounting	Configuration	Source / Watts	CCT	Beam	Driver / Control	Circuits	Housing Finish	Accessories
SL2DC-CBRC									

Slice 2" Continuous Linear Recessed Combination Downlight

Flanged Housings

AF   Flanged Airtight/IC*

Flangeless Housings

AP   Plaster IC/Airtight

* Must specify housing finish for the flange

4A
4ft (nominal)
6 cell ends - 2' lens center5A
5ft (nominal)
6 cell ends - 3' lens center6A
6ft (nominal)
6 cell ends - 4' lens center8A
8ft (nominal)
6 cell ends - 6' lens center8B
8ft (nominal)
6 cell ends and center - two 2' lens sectionsCST
Custom

Submit sketch/dwg of desired configuration and fixture length. 12 cell minimum for Multicell. 1ft minimum for lens section. 3ft minimum overall length. Insert any blank lengths as desired. Refer to Slice 2" Multicell and Lens datasheets for more information.

Multicell

SO8   8W/ft 661Lm/ft* 90+CRI, 50+R9 Specialty BoardSO15   16W/ft 1116Lm/ft* 90+CRI, 50+R9 Specialty Board

Lens

F4
5W/ft
703Lm/ft
90+CRI, 50+R9 Specialty BoardF8
10W/ft
1363Lm/ft
90+CRI, 50+R9 Specialty Board

Note: Select each Multicell and Lens source and separate with / for order code. i.e. SO8/F4

*Extrapolated from 6 cell (11.375")x15" module. Refer to photometric table for more exact power and lumen data

  Supports CA T24 part 6 compliance meeting JA8 requirements

27

2700K

30

3000K

35

3500K

40

4000K

15

Spot

30

Narrow Flood

45

Flood

CST

Custom

Use this code if differing beams are required at varying locations. Define required beams and locations in sketch/drawing

SY1

0-10

1.0%, UNV (120-277V)

linear

SY2

0-10

1.0%, UNV (120-277V)

log

EldoLED

E1

0-10

0.1%, UNV (120-277V)

log

E2

DALI-2

0.1%, UNV (120-277V)

log

Note: Integral driver - remote upon request

E3

0-10

0.1%, UNV (120-277V)

linear

1C

1 Circuit

2C

2 Circuit

W

White Paint

BLK

Black

PXX
Specialty Color
(paint stocked in house - see finish chart)*

P01-P15

C
Custom/RAL*

Note: Baffle is black only

*See Finish Guide




Fixture Lengths and Design Criteria

Standard and Custom


Standard defined lengths and configurations are shown below. Using the basic building blocks of celled modules, lensed modules and blank panels, custom continuous runs are available using the following design criteria: minimum of two 6 cell modules at any location within a specified run; minimum 1ft length of lensed section at any location within a specified run; blank panels of any length greater than 1/2" permitted; and minimum overall length > 3ft.

SL2DC-CRBC- Standard Configurations


4A




5A



6A




8A



8B



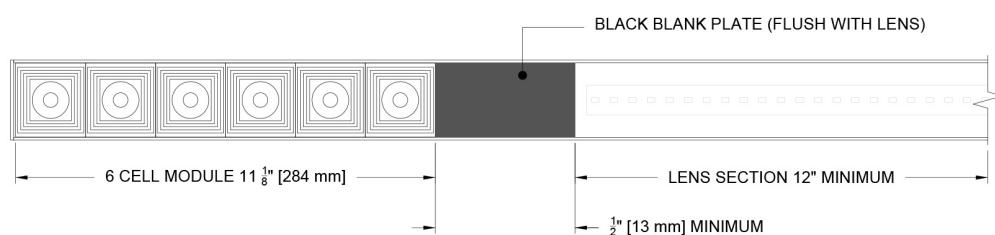CST




Ceiling Cutouts and Dimensions

Furnish layouts of any non-standard runs for the purpose of submittal drawings which require approval prior to fabrication.

SL2DC-CRBC - Recessed Flangeless Mount


AP

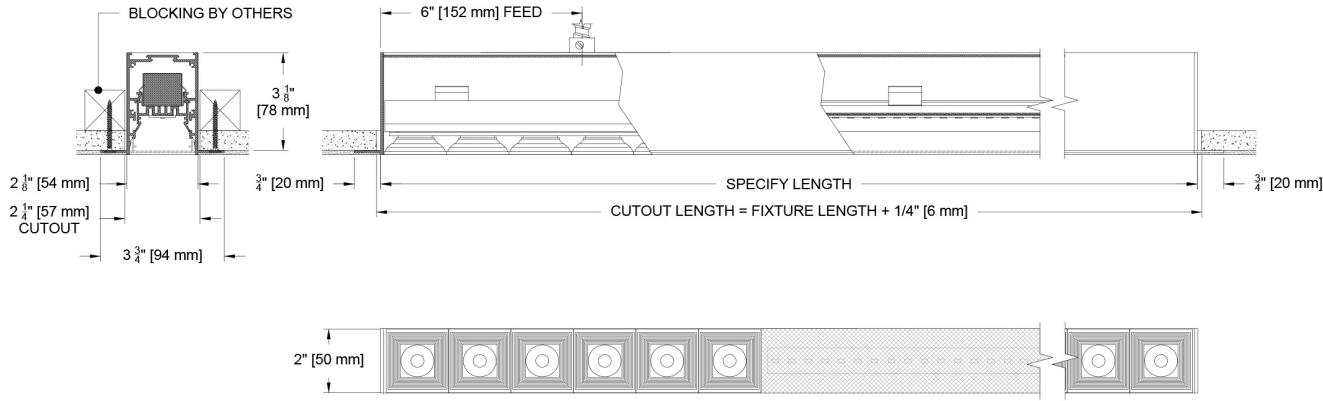
(SL2DC-CRBC-AP-)



SL2DC-CRBC Recessed Flange Mount











AF

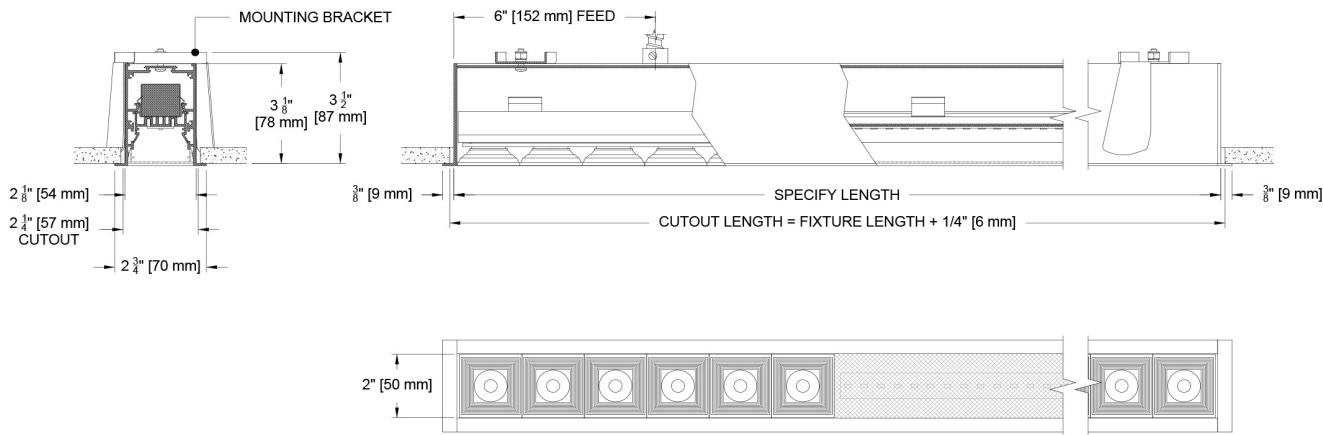(SL2DC-CRBC-AF-)



Photometric Table

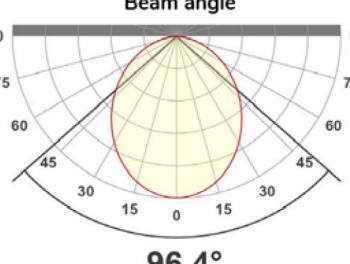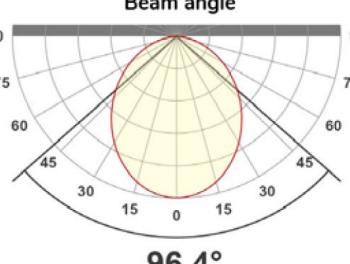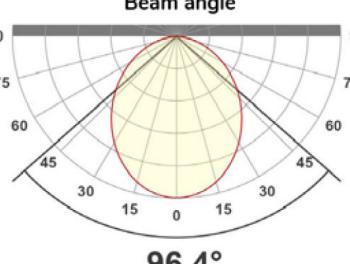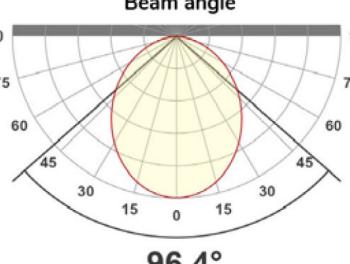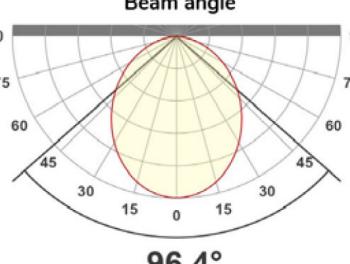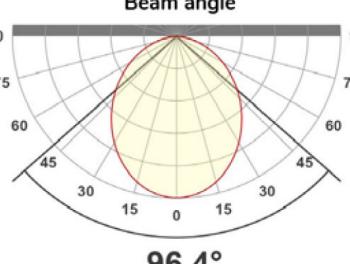Values are delivered lumens based on a 6-cell module at 11.125" (284mm) and extrapolated for per foot numbers or 1ft of lens section. CAUTION: IES FILES ARE FOR A 6 CELL MODULE or 1ft LENS SECTION. CALCULATIONS MUST PLACE THE 6 CELL MODULE FILE 11.125" (284mm) OR 1ft LENS SECTION AT THE APPROPRIATE LOCATION OF THE DEFINED CONFIGURATION. All data is based on goniometer measurements of production representative product. Measurements are taken at 3000 CCT with a black baffle and can vary +/- 10% from LED manufacturer rated flux range.

Lumens per Foot Photometrics																							
Multi-Cell Beamspreads		15°						30°				45°											
Source	System watts (W)	Delivered Lumens (lm/ft)	Lumens/Watt/ft	Peak (cd)	10% Field	Delivered Lumens (lm/ft)	Lumens/Watt/ft	Peak (cd)	10% Field	Delivered Lumens (lm/ft)	Lumens/Watt/ft	Peak (cd)	10% Field										
SO8	8	661	80	4287	42°	634	76	1893	59°	639	77	1170	69°										
SO15	16	1116	70	7673	41°	1119	71	3362	59°	1126	71	2098	69°										
CCT Multiplier		Beam angle						Beam angle				Beam angle											
CCT	Citizen	 15.6°						 30.4°				 44.5°											
ISO CD plot based on SO8 source. UGR values are from 4H 3H row and based on per foot extrapolation.																							
Lumens and Length of 6 Cell Module																							
2" Slice			Length			Flux and Power (SO8)				Flux and Power (SO15)													
Modules	Cells	English (in)	Metric (mm)	Delivered Lm			System Watts	Delivered Lm			System Watts	15°		30°	45°								
				15°	30°	45°		15°	30°	45°		15	1062	1065	1072	15							
1	6	11 3/8	289	629	603	608	8	1062	1065	1072	15												
Lumens per Foot for lensed sections																							
2" Linear Lensed				Performance/Foot																			
Source		System Watts (W/ft)		Delivered Lumens (lm/ft)			Lumens/Watt (ft)			Peak cd													
F4		5		395			82			165													
F8		10		790			82			334													
CCT Multiplier				 96.4°																			
CCT	Citizen	 96.4°																					
2700	0.96	 96.4°																					
3000	1.00	 96.4°																					
3500	1.03	 96.4°																					
400	1.04	 96.4°																					

Color Data

All data is based from goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted. (Data for Multicell board. Please see datasheet SL2DC-LSF for lensed color information.)

SO8 and SO15

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 50+R9, Hue Bin 1 and 16

