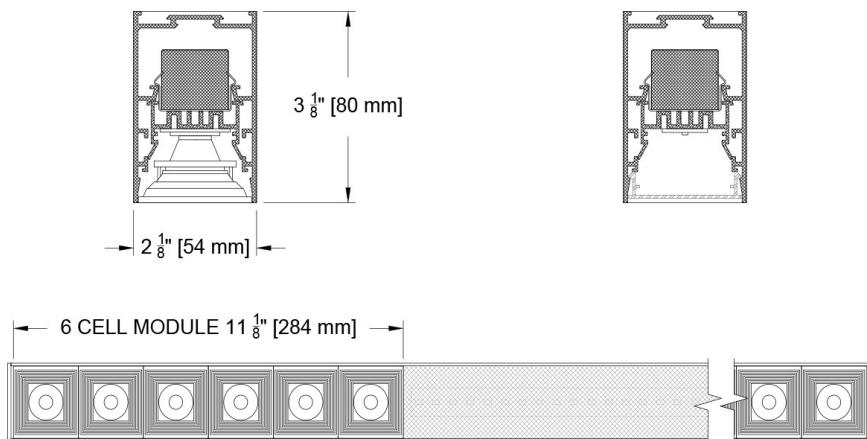


The Slice Family

The Slice Combo pairs a diffuse general source with a punchy, directional downlight in a single fixture. As part of the Slice family, it is offered in linear 1" and 2" wide profiles in recessed, surface and pendant options. This surface mounted/pendant combines the Multicell and Lensed fixtures to allow an almost infinite number of design options. We have defined a series of standard offerings within this datasheet, but expect that you will want to modify the configurations for your project needs. Please take heed of the design criteria for minimum sizes. For more detail on the lens or multicell sections please refer to the datasheets (SL2DC-LRC or SL2DC-MCRC). The Slice Combo can be used to illuminate your space with precision.



Lumens and Length of 6 Cell Module

2" Slice		Length		Flux and Power (SO8)			Flux and Power (SO15)				
Modules	Cells	English (in)	Metric (mm)	Delivered Lm			System Watts	Delivered Lm			System Watts
				15°	30°	45°		15°	30°	45°	
1	6	11 3/8	289	629	603	608	8	1062	1065	1072	15
Lumens per Foot for lensed sections											
2" Linear Lensed				Performance/Foot							
Source		System Watts (W/ft)		Delivered Lumens (lm/ft)		Lumens/Watt (ft)		Peak cd			
F4		5		395		82		165			
F8		10		790		82		334			

Refer to Photometric page for lumens/ft values

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: SL2DC-CBSF-STM-18"-CST-SO8/F8-35-30-SY2-B

Fixture	Mounting	Length	Configuration	Source / Watts	CCT	Beam	Driver / Control	Circuits	Housing Finish
SL2DC-CBSF									

SL2DC-CBSF

Slice 2" Continuous Linear Surface/Pendant Combination Downlight	SM Surface Mount CBM Cable Mount STM Stem Mount	B Blank - use for surface mount - Specify Length of Stem or Cable in inches	4A 4ft (nominal) 6 cell ends - 2' lens center	Multicell SO8 8W/ft 661Lm/ft* 90+CRI, 50+R9 Specialty Board	27 2700K	15 Spot	SY1 0-10 1.0%, UNV (120-277V) linear	1C 1 Circuit	Standard B Black Paint
			5A 5ft (nominal) 6 cell ends - 3' lens center	SO15 16W/ft 1116Lm/ft* 90+CRI, 50+R9 Specialty Board	30 3000K	30 Narrow Flood	SY2 0-10 1.0%, UNV (120-277V) log	2C 2 Circuit	Optional W White Paint
			6A 6ft (nominal) 6 cell ends - 4' lens center	Lens F4 5W/ft 703Lm/ft 90+CRI, 50+R9 Specialty Board	35 3500K	45 Flood	EldoLED E1 0-10 0.1%, UNV (120-277V) log		PXX Specialty Paint Color* P01-P15
			8A 8ft (nominal) 6 cell ends - 6' lens center	F8 10W/ft 1363Lm/ft 90+CRI, 50+R9 Specialty Board	40 4000K	CST Custom Use this code if differing beams are required at varying locations. Define required beams and locations in sketch/drawing	E2 DALI-2 0.1%, UNV (120-277V) log		C Custom/RAL* Note: Baffle is black only
			8B 8ft (nominal) 6 cell ends and center - two 2' lens sections	Note: Select each Multicell and Lens source and separate with / for order code. i.e. SO8/F4 *Extrapolated from 6 cell (11.375")15" module. Refer to photometric table for more exact power and lumen data Supports CA T24 part 6 compliance meeting JA8 requirements		E3 0-10 0.1%, UNV (120-277V) linear			
			CST Custom Submit sketch/dwg of desired configuration and fixture length. 12 cell minimum for Multicell. 1ft minimum for lens section. 3ft minimum overall length. Insert any blank lengths as desired. Refer to Slice 2" Multicell and Lens datasheets for more information			Note: Integral driver - remote upon request			

FINISH GUIDE LINK

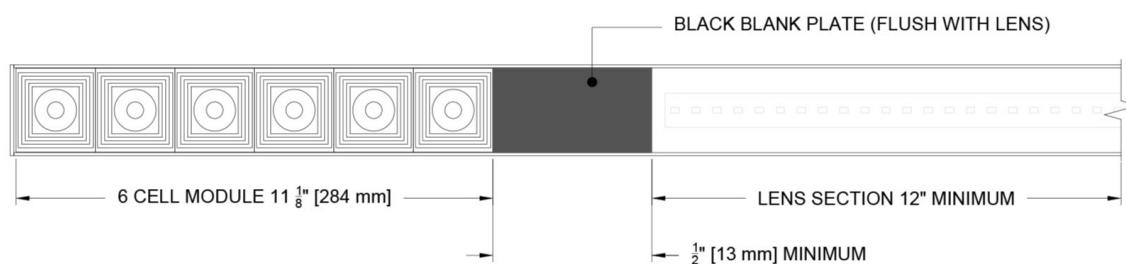
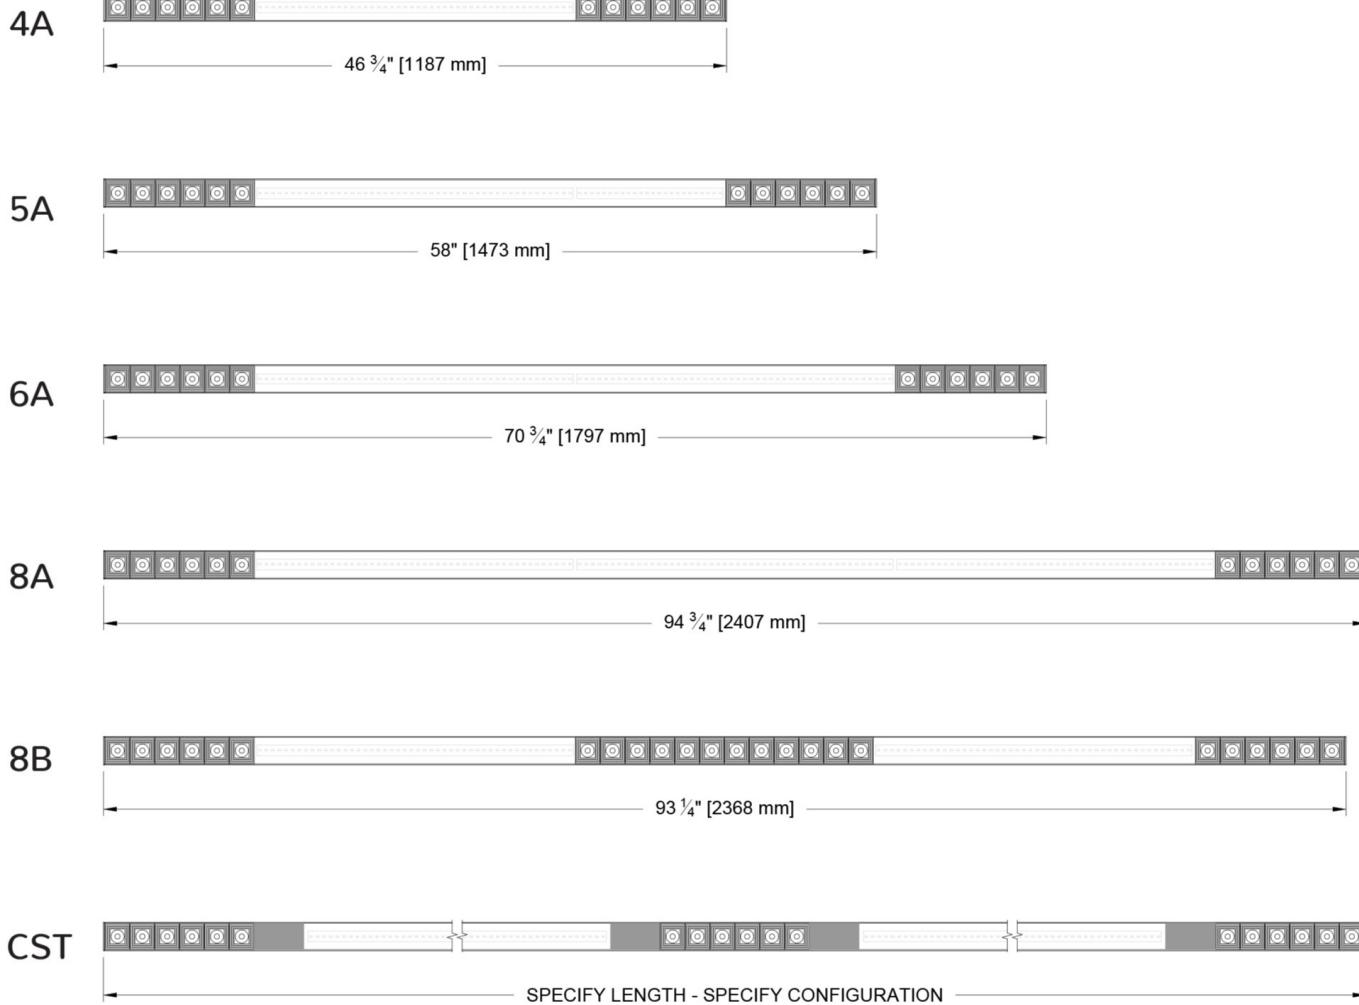
*See Finish Guide

Fixture Lengths and Design Criteria

Standard and Custom

Standard defined lengths and configurations are shown below. Using the basic building blocks of celled modules, lensed modules and blank panels, custom continuous runs are available using the following design criteria: minimum of two 6 cell modules at any location within a specified run; minimum 1ft length of lensed section at any location within a specified run; blank panels of any length greater than 1/2" permitted; and minimum overall length > 3ft.

SL2DC-CBSF - Standard Modular Configurations




Ceiling Cutouts and Dimensions

Furnish layouts of any non-standard runs for the purpose of submittal drawings which require approval prior to fabrication.

SL2DC-CBSF-Surface Mount Combo Housing

SM

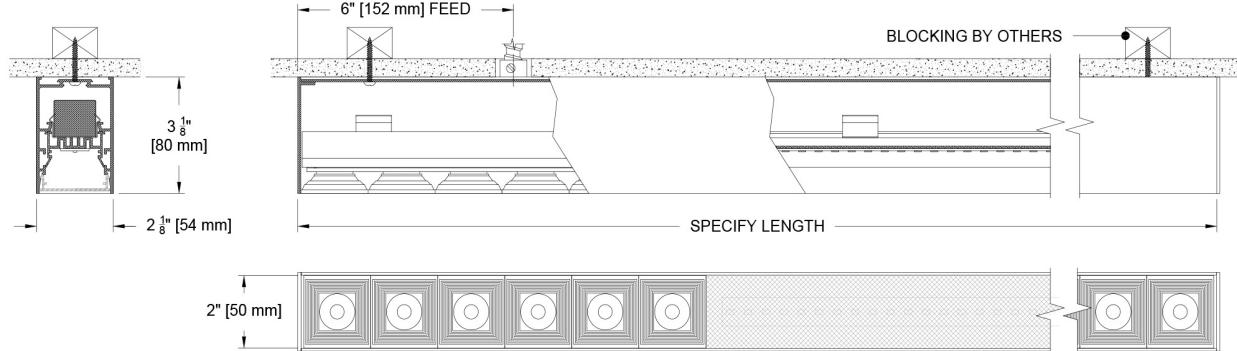
(SL2DC-CBSF-SM)



SL2DC-CBSF-Cable Mount Combo Housing

CBM

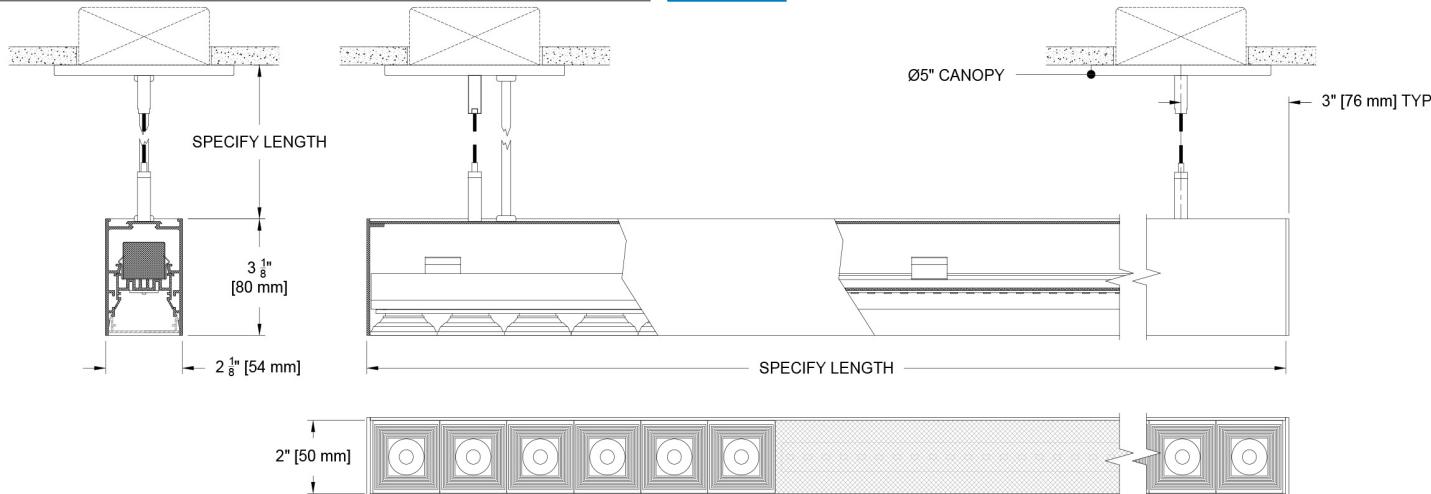
(SL2DC-CBSF-CBM)



SL2DC-CBSF - Stem Mount Combo Housing










STM

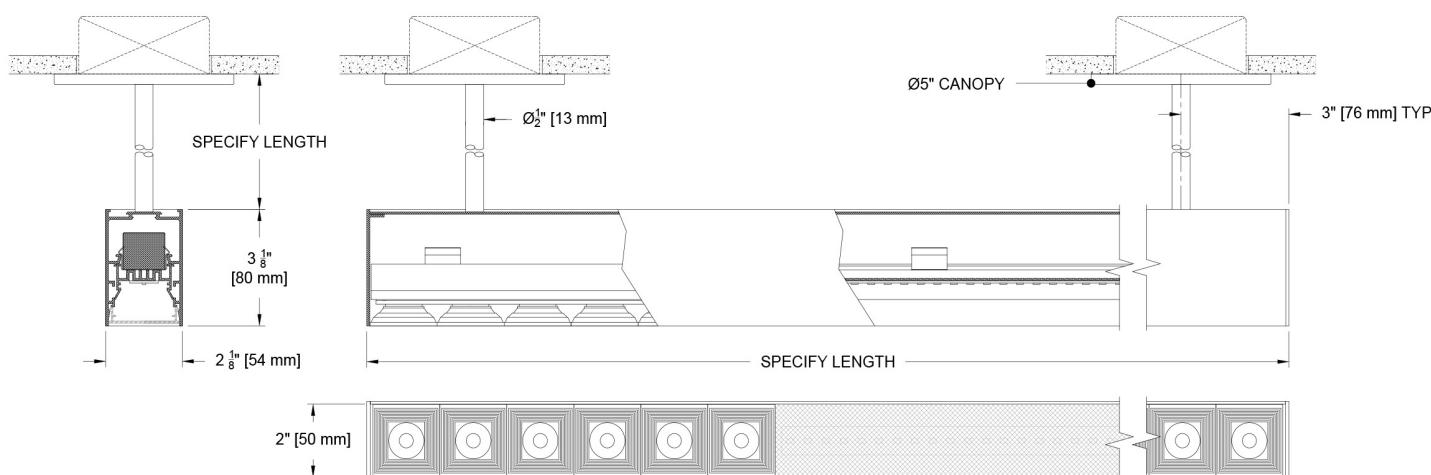(SL2DC-CBSF-STM)



Photometric Table

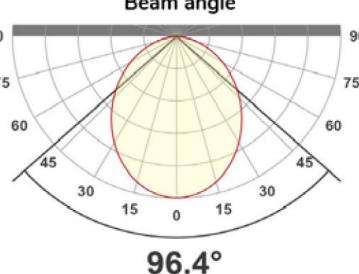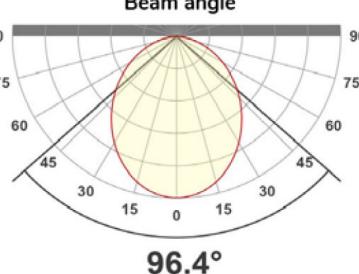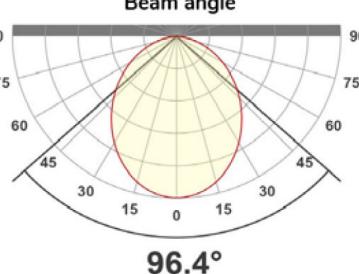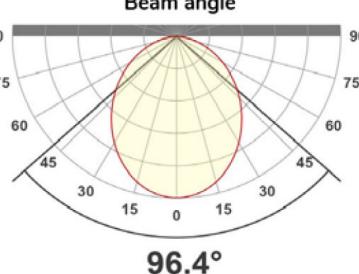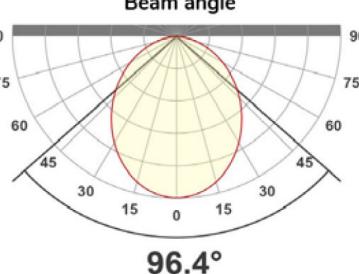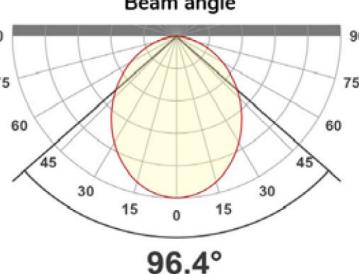Values are delivered lumens based on a 6-cell module at 11.125" (284mm) and extrapolated for per foot numbers or 1ft of lens section. CAUTION: IES FILES ARE FOR A 6 CELL MODULE or 1ft LENS SECTION. CALCULATIONS MUST PLACE THE 6 CELL MODULE FILE 11.125" (284mm) OR 1ft LENS SECTION AT THE APPROPRIATE LOCATION OF THE DEFINED CONFIGURATION. All data is based on goniometer measurements of production representative product. Measurements are taken at 3000 CCT with a black baffle and can vary +/- 10% from LED manufacturer rated flux range.

Lumens per Foot Photometrics																							
Multi-Cell Beamspreads		15°						30°				45°											
Source	System watts (W)	Delivered Lumens (lm/ft)	Lumens/Watt/ft	Peak (cd)	10% Field	Delivered Lumens (lm/ft)	Lumens/Watt/ft	Peak (cd)	10% Field	Delivered Lumens (lm/ft)	Lumens/Watt/ft	Peak (cd)	10% Field										
SO8	8	661	80	4287	42°	634	76	1893	59°	639	77	1170	69°										
SO15	16	1116	70	7673	41°	1119	71	3362	59°	1126	71	2098	69°										
CCT Multiplier		Beam angle						Beam angle				Beam angle											
CCT	Citizen	 15.6°						 30.4°				 44.5°											
ISO CD plot based on SO8 source. UGR values are from 4H 3H row and based on per foot extrapolation.																							
Lumens and Length of 6 Cell Module																							
2" Slice			Length			Flux and Power (SO8)				Flux and Power (SO15)													
Modules	Cells	English (in)	Metric (mm)	Delivered Lm			System Watts	Delivered Lm			System Watts	15°		30°	45°								
				15°	30°	45°		15°	30°	45°		15	1062	1065	1072	15							
1	6	11 3/8	289	629	603	608	8	1062	1065	1072	15												
Lumens per Foot for lensed sections																							
2" Linear Lensed				Performance/Foot																			
Source		System Watts (W/ft)		Delivered Lumens (lm/ft)			Lumens/Watt (ft)			Peak cd													
F4		5		395			82			165													
F8		10		790			82			334													
CCT Multiplier				 96.4°																			
CCT	Citizen	 96.4°																					
2700	0.96	 96.4°																					
3000	1.00	 96.4°																					
3500	1.03	 96.4°																					
400	1.04	 96.4°																					

Color Data

All data is based from goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT unless otherwise noted. (Data for Multicell board. Please see datasheet SL2DC-LSF for lensed color information.)

SO8 and SO15

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 50+R9, Hue Bin 1 and 16

