

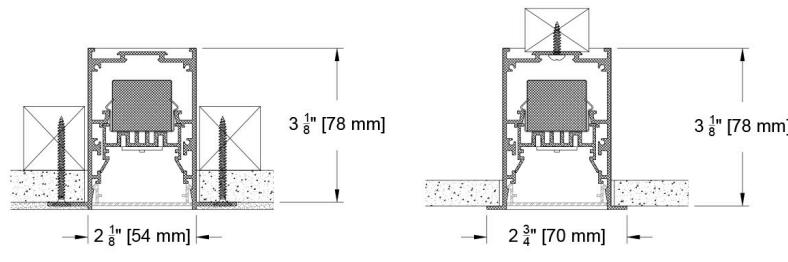


The Slice Family

Illuminate your space with precision Slices of homogeneous light. The Slice family offers linear 1" and 2" wide profiles in recessed and below ceiling options in lensed and multi-cell configurations. The 2" lensed recessed fixture offers both flanged and flangeless trim option, delivers over 750 lumens per foot with a modular design allowing continuous homogenous light to your specified length. With a Lambertian type distribution of ~100°, the fixture is perfect as a general continuous linear illumination device. You have found the 2" lensed recessed Slice and we hope you enjoy the details.

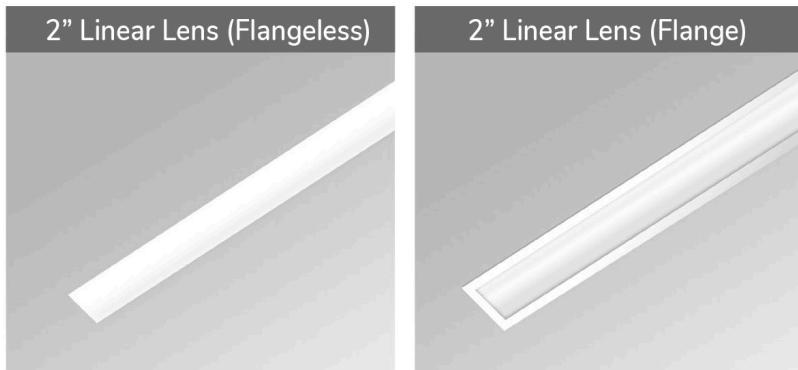

Lumens per Foot Photometrics				
2" Linear Lensed		Performance/Foot		
Source	System watts (W/ft)	Delivered Lumens (lm/ft)	Lumens/Watt/ft	Peak cd
F4	5	395	82	165
F8	10	790	82	334

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (SL2DC-LRC)

Trim

- 14 color options + Custom and RAL# available
- Flange or Flangeless

Source Optics

- Over 80 lumens per watt per foot
- Up to 790 lm/ft available
- TITLE 24 Fixture photometrics support CA Title 24 part 6 compliance meeting requirements of JA8
- Even illumination with wide (~100°) lambertian type distribution
- 1' minimum board length. Depending on specified length, ends may have unlit area. Request submittal drawing if definition is required
- CCT offerings - 2700k, 3000k, 3500k and 4000k
- 90+ CRI and 50+ R9

Housing

- Specify to desired length for even continuous light
- Minimum 2' length for integral driver and appropriate driver loading
- Lengths longer than 8' are assembled in field with supplied joiners
- IC Airtight housing supports CA Title 24 part 6 compliance to JA8 requirements
- IC Damp listed

Driver And Control

- Integral Driver standard - remote upon request
- 0.1% dimming available in 0-10 or DALI-2 protocols
- Flicker Free to IEEE 1789-2015 no effect to low risk
- Universal 120v to 277v

Ordering Codes

PROJECT:


SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: SL2DC-LRC-AF-450"-F8-30-SY2-P16

Fixture	Mounting	Length	Source / Watts	CCT	Driver / Control	Trim Finish	Accessories
SL2DC-LRC	Flanged Housings AF   Flanged Airtight/IC	Specify exact length in inches* [^] *Minimum length of 24 inches required (2 modules) ^Minimum board length of 12" (1 module)	F4   5W 395Lm 90+CRI, 50+R9 values per foot	27 2700K	SY1 0-10 1.0%, UNV (120-277V) linear	Standard	CP Chicago Plenum
	Flangeless Housings AP   Plaster Airtight/IC*	Note: Depending on length specified, ends may have unlit area. Please request submittal drawing if unlit area definition is required.	F8   10W 790Lm 90+CRI, 50+R9 values per foot	30 3000K 35 3500K 40 4000K	SY2 0-10 1.0%, UNV (120-277V) log EldoLED E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear	Optional W White Paint PXX Specialty Paint Color*  C Custom/RAL Color* 	 *See Finish Guide


Ceiling Cutouts and Dimensions

Minimum 2' length. Minimum board length of 12". Depending on length specified, ends may have unlit area. Request submittal drawing if unlit end area definition is required.

SL2DC- Recessed Flangeless Mount

AP


(SL2DC-LRC-AP-)

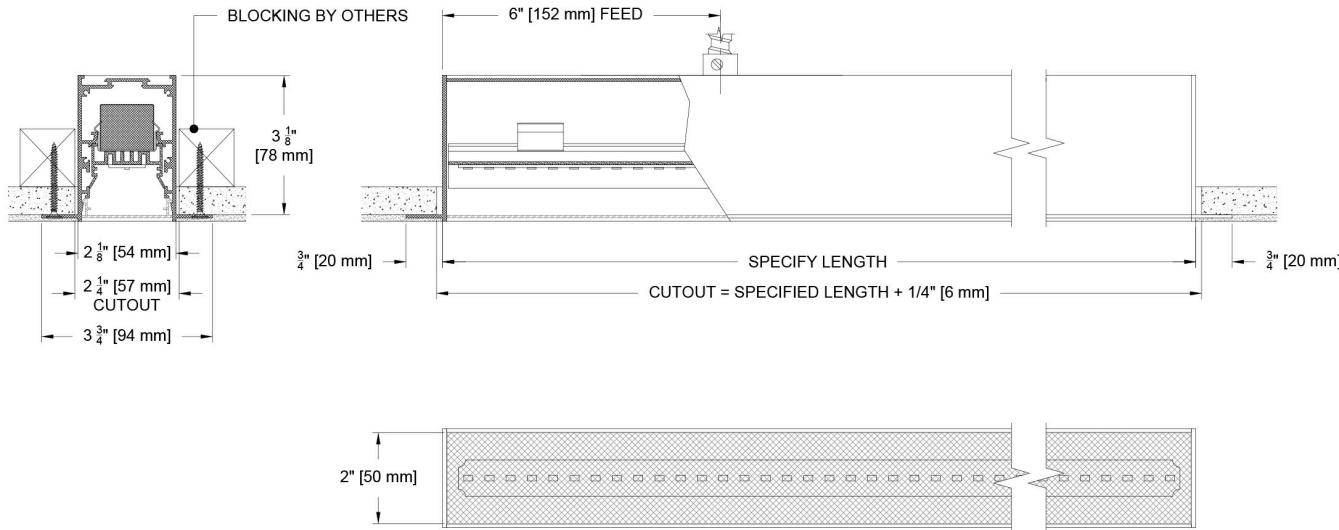

SL2DC- Recessed Flange Mount


AF

(SL2DC-LRC-AF-)

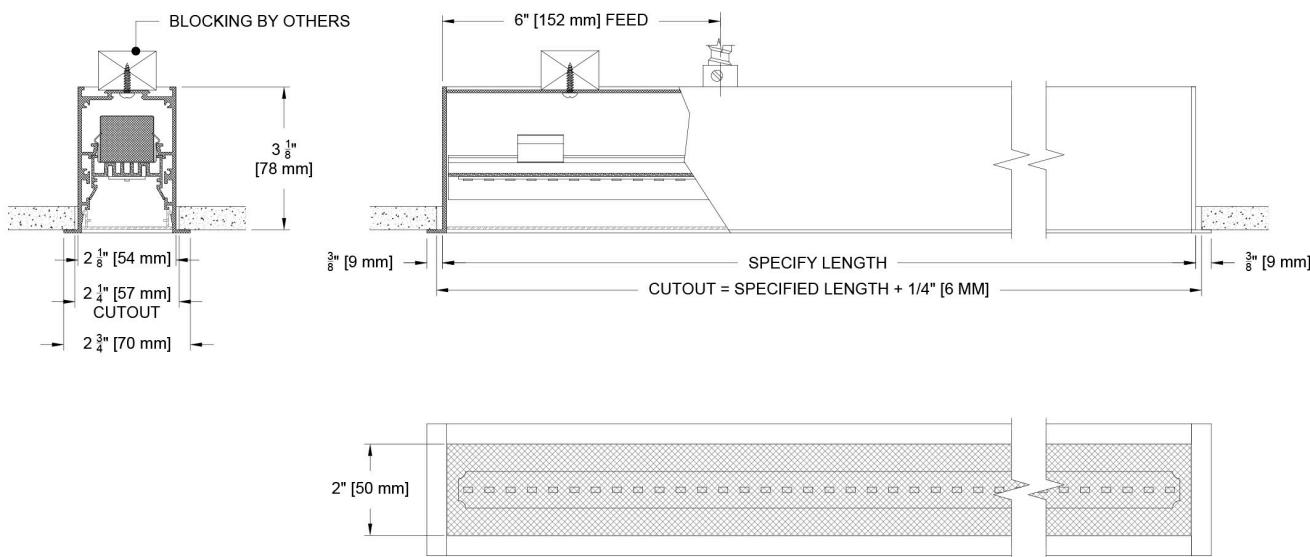

Photometric Table

Values are per foot. All flux measurements are delivered lumens based on 3000K and 1' (ft) length from production representative product. Flux can vary +/- 10% from source manufacturers rated flux range. Measurements taken with standard lens in a black housing. System watts are based typical source datasheet power values + 20% driver losses. Efficacy values will vary based on length and driver load.

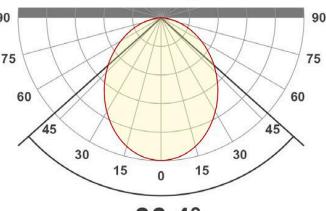Lumens per Foot Photometrics				
2" Linear Lensed		Performance/Foot		
Source	System watts (W/ft)	Delivered Lumens (lm/ft)	Lumens/Watt/ft	Peak cd
F4	5	395	82	165
F8	10	790	82	334
CCT Multiplier		Beam angle		
CCT	Citizen	 96.4°		
2700	0.96			
3000	1.00			
3500	1.03			
4000	1.04			

All measurements are delivered lumens/ft.
ISO CD plot based on F4 source

Color Data

F8 and F4 Linear Board

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 50+R9, Hue Bin 1 and 16

