

Light efficiency:

87 Lumen/Watt


Output: 1368 lm

Light quality:


CRI: 93.2

Peak: 2305 cd

Power: 15.7 W

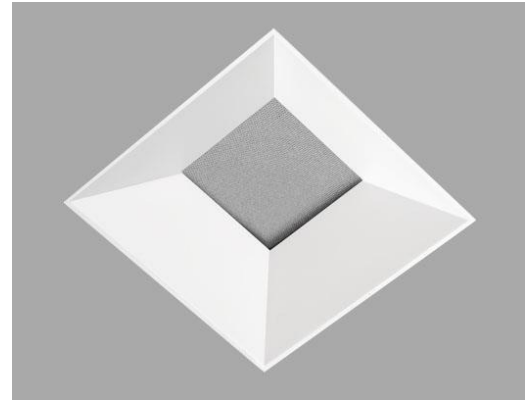

Beam angle

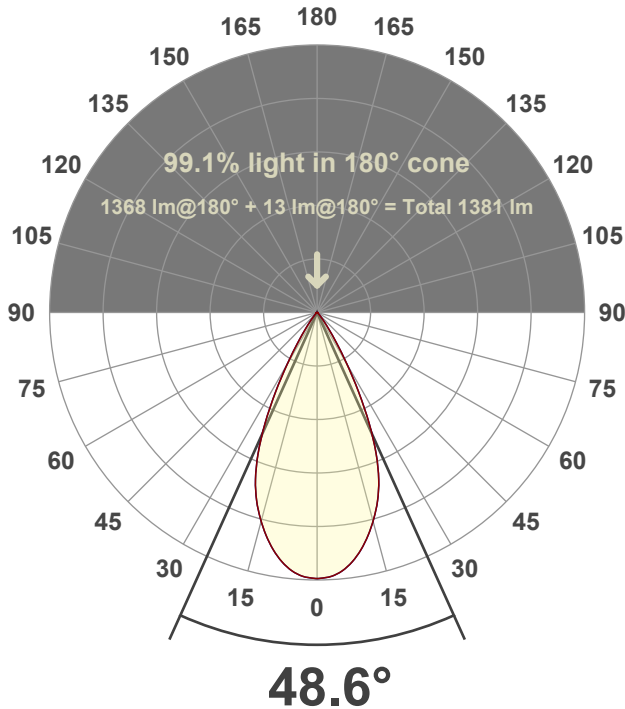

Test number:

CR3D-SF-DR-C14-30K-50

Luminaire Model:

Core 3" Square Deep Regress C14-30K-50°

Date and time:


3/11/2026 2:33:06 PM

LUM: 1368


3131 K

*Variation due to source size, bezel geometry, or secondary optics

Spectra

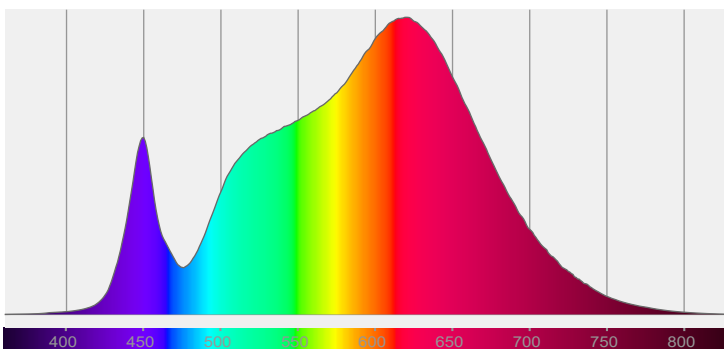

CRI: 93.2 (R1-R8)

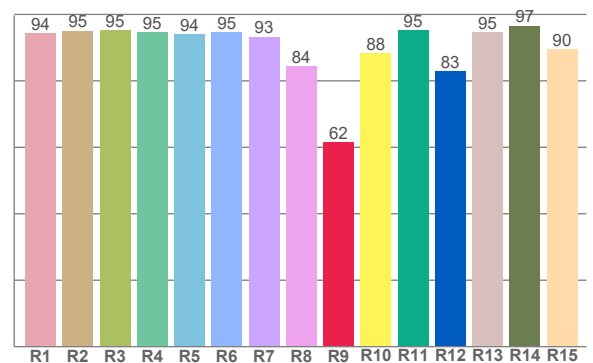

Color parameters

	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	93.2	61.6	91.7	102.0	91.2	0.428	0.401	0.246	0.346	0.0002

R_f 91.7


Fidelity index R_f

R_g 102.0


Gammut index R_g

TM30: 91.7


TM-30Color

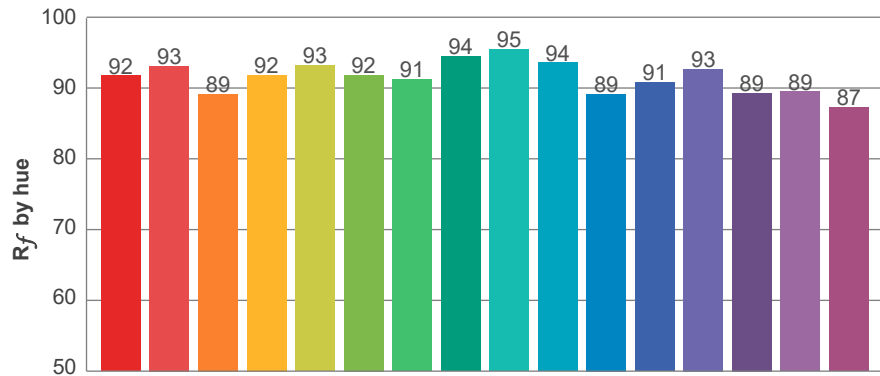


Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	92	-4%	-2%
2	93	-3%	2%
3	89	-1%	6%
4	92	2%	5%
5	93	3%	4%
6	92	5%	0%
7	91	2%	-5%
8	94	2%	-3%
9	95	-2%	-2%
10	94	-3%	2%
11	89	-1%	7%
12	91	5%	2%
13	93	4%	-2%
14	89	5%	-7%
15	89	1%	-7%
16	87	0%	-10%

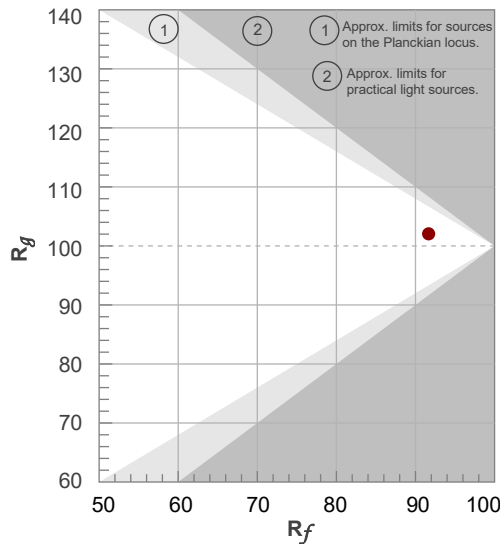


Color vector graphics

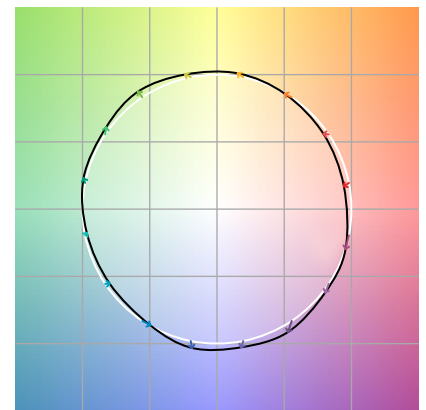


Color distortion

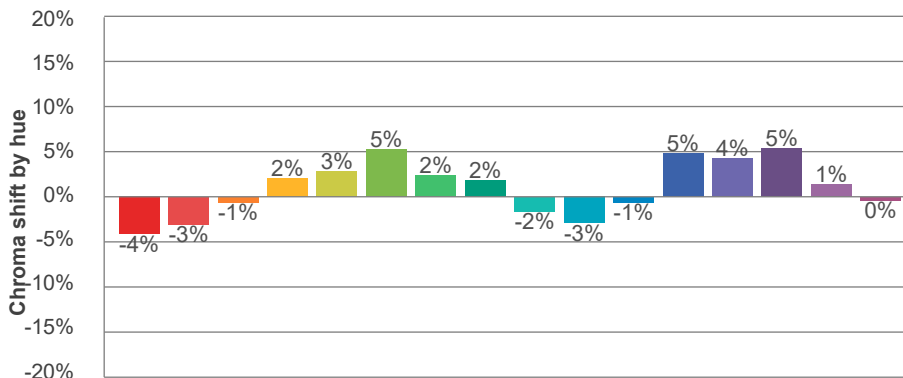

Hue bin

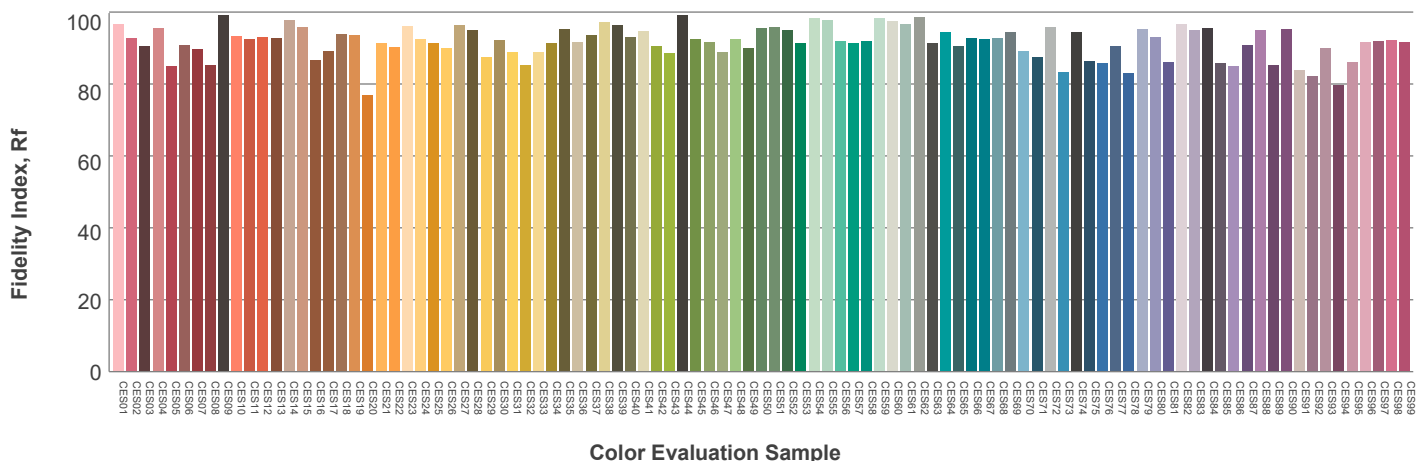

Beam details

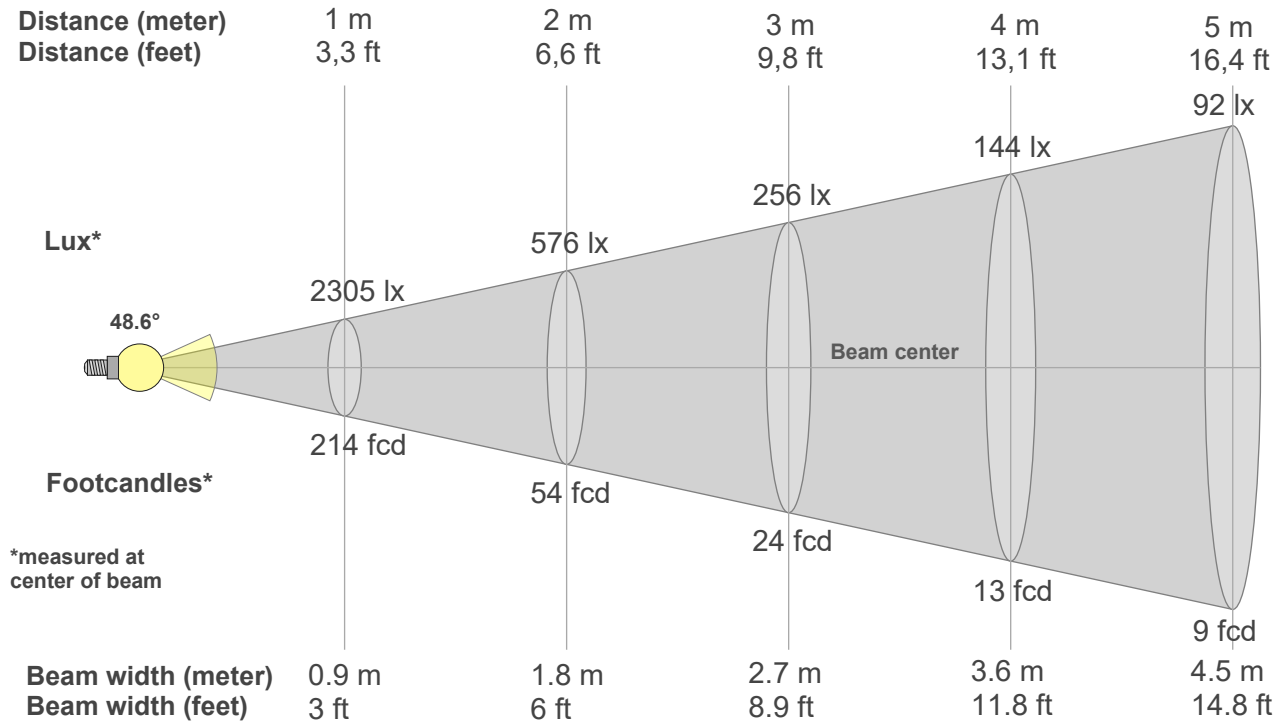

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2305lx	576lx	256lx	144lx	92lx	64lx	47lx	36lx	28lx	23lx	19lx	16lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx
214.1fcd	53.5fcd	23.8fcd	13.4fcd	8.6fcd	5.9fcd	4.4fcd	3.3fcd	2.6fcd	2.1fcd	1.8fcd	1.5fcd	1.3fcd	1.1fcd	1fcd	0.8fcd	0.7fcd	0.7fcd	0.6fcd	0.5fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2305	2297	2276	2238	2183	2109	2022	1925	1817	1700	1561	1388	1185	962	733	519	354	233	148	92
100%	100%	99%	97%	95%	92%	88%	84%	79%	74%	68%	60%	51%	42%	32%	23%	15%	10%	6%	4%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2305	2297	2276	2238	2183	2109	2022	1925	1817	1700	1561	1388	1185	962	733	519	354	233	148	92
100%	100%	99%	97%	95%	92%	88%	84%	79%	74%	68%	60%	51%	42%	32%	23%	15%	10%	6%	4%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2305	2297	2276	2238	2183	2109	2022	1925	1817	1700	1561	1388	1185	962	733	519	354	233	148	92
100%	100%	99%	97%	95%	92%	88%	84%	79%	74%	68%	60%	51%	42%	32%	23%	15%	10%	6%	4%


Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2305	2297	2276	2238	2183	2109	2022	1925	1817	1700	1561	1388	1185	962	733	519	354	233	148	92
100%	100%	99%	97%	95%	92%	88%	84%	79%	74%	68%	60%	51%	42%	32%	23%	15%	10%	6%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
48.6°	68.1°	79.8°	99.3%	98.7%

LAMPS (number of lamps)
50

Light planning Luminaire budgetary diagram

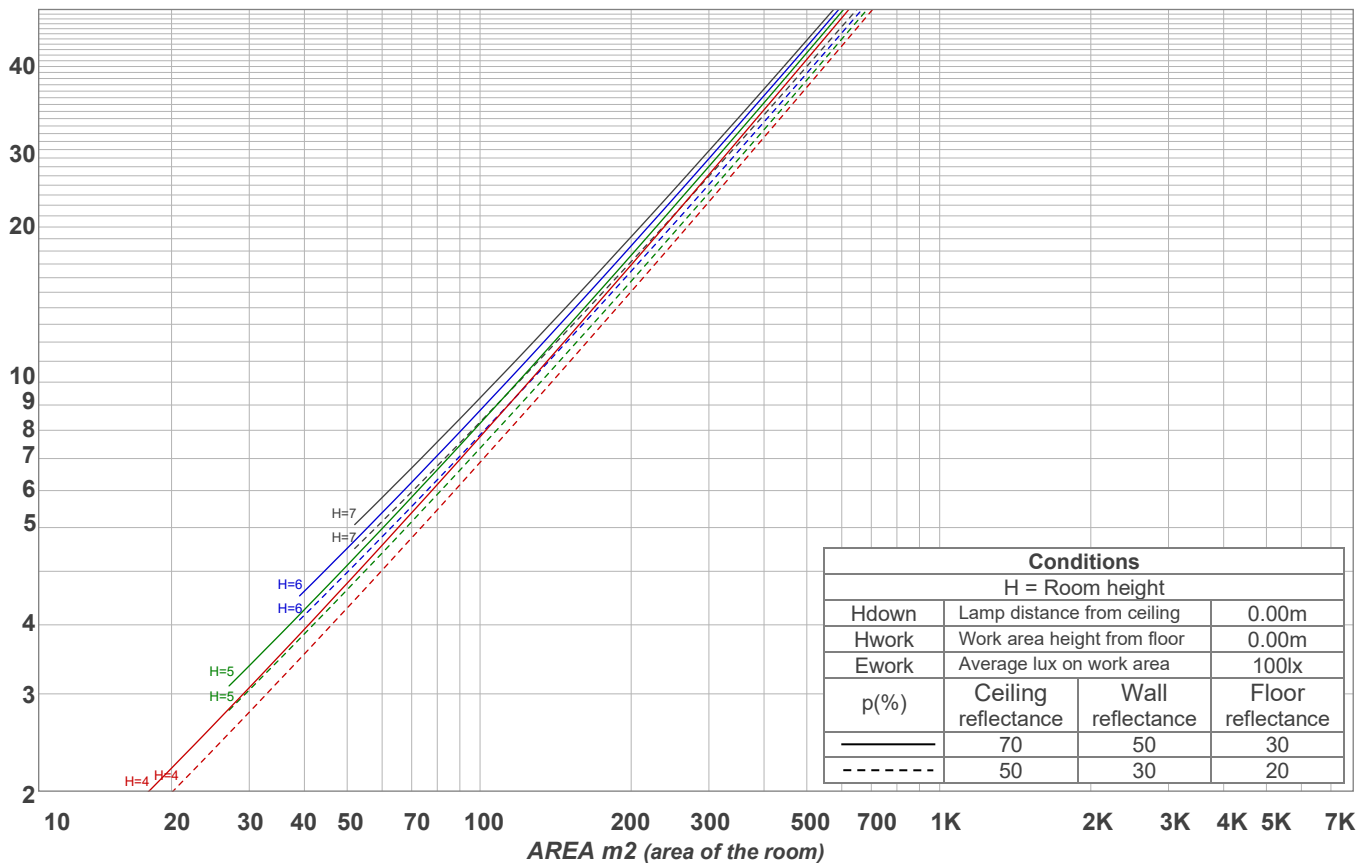

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	90	88	86	85
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69
8	85	77	71	68	84	76	71	68	75	70	67	74	70	67	73	69	67	66
9	81	73	68	64	80	73	68	64	72	67	64	71	67	64	70	66	64	63
10	78	70	65	61	77	69	65	61	69	64	61	68	64	61	67	64	61	60

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
211 lm	519 lm	476 lm	132 lm	17.9 lm	3.23 lm	3.32 lm	3.21 lm	2.80 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

www.specialty-lighting.com As a result of our continuous improvement, values are subject to change without notice. These are delivered results and can vary +/- 10% from published source data range.