

Light efficiency:

69 Lumen/Watt

Output: 959 lm

Light quality:


CRI: 96.2

Peak: 4671 cd

Power: 13.9 W



Beam angle

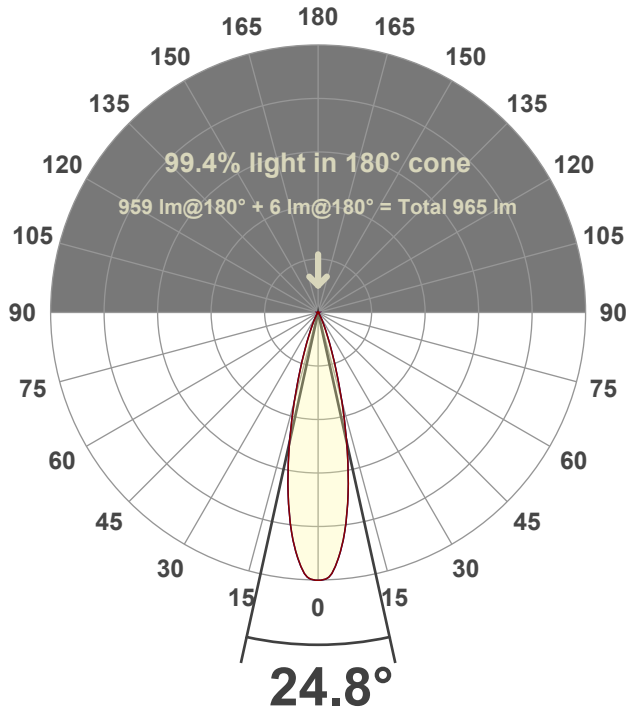

Test number:

CR4D-RA-DR-Z-T15-TW1840-24

Luminaire Model:

CORE 4" ROUND DEEP REGRESS T15-1840-24°

Date and time:

8/22/2025 11:23:58 AM

LUM: 959


Primary Optic 24° = 24.8°

2937 K


Measured at Mid-Point of Tuneable White CCT Range

*Variation due to source size, bezel geometry, or secondary optics

Spectra

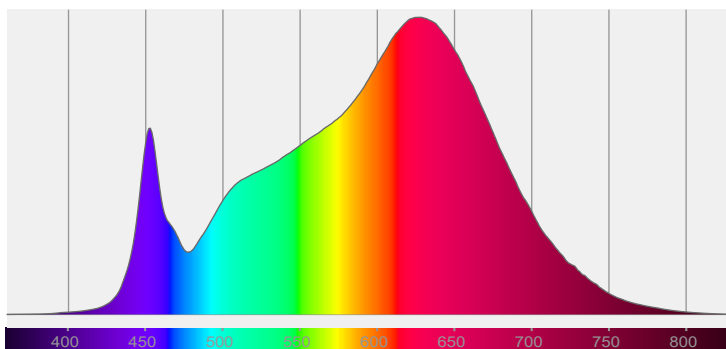

CRI: 96.2 (R1-R8)

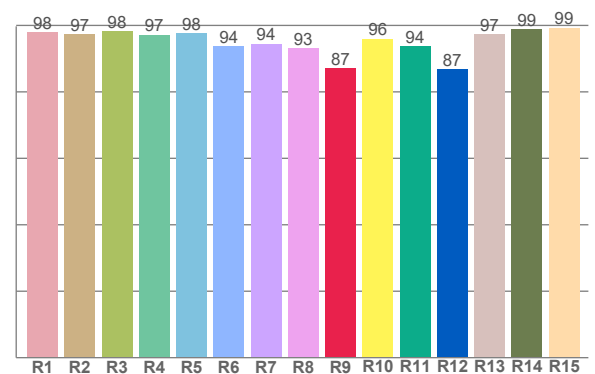

Color parameters

	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	96.2	87.0	94.2	103.0	93.8	0.434	0.390	0.255	0.344	-0.0052

R_f 94.2


Fidelity index R_f

R_g 103.0


Gammut index R_g

TM30: 94.2



TM-30Color

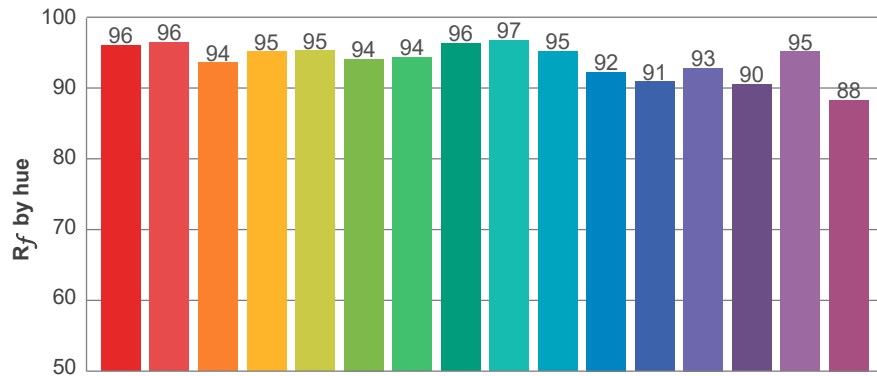

Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	96	-2%	0%
2	96	-1%	1%
3	94	1%	3%
4	95	0%	0%
5	95	1%	2%
6	94	4%	0%
7	94	1%	-1%
8	96	2%	-1%
9	97	1%	1%
10	95	1%	3%
11	92	3%	5%
12	91	5%	0%
13	93	3%	-4%
14	90	5%	-6%
15	95	0%	-2%
16	88	1%	-9%

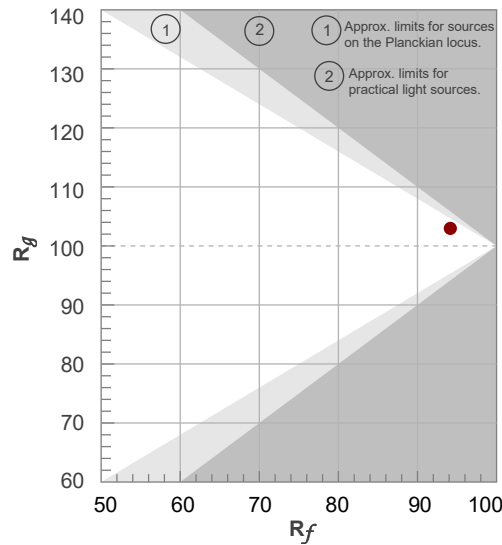


Color vector graphics

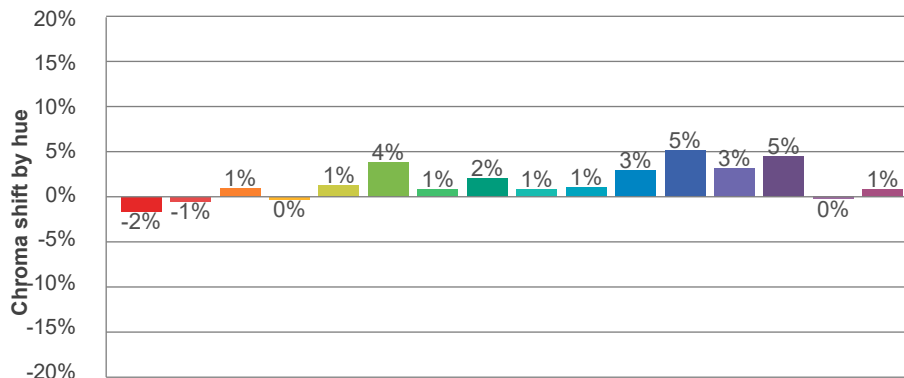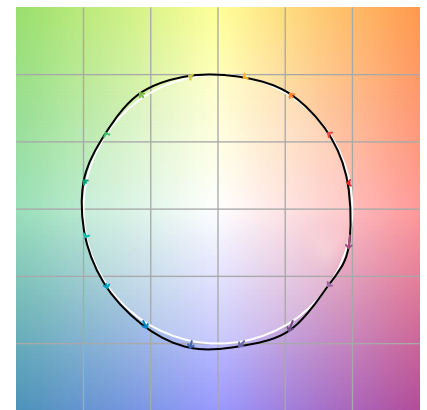

Color distortion




Hue bin

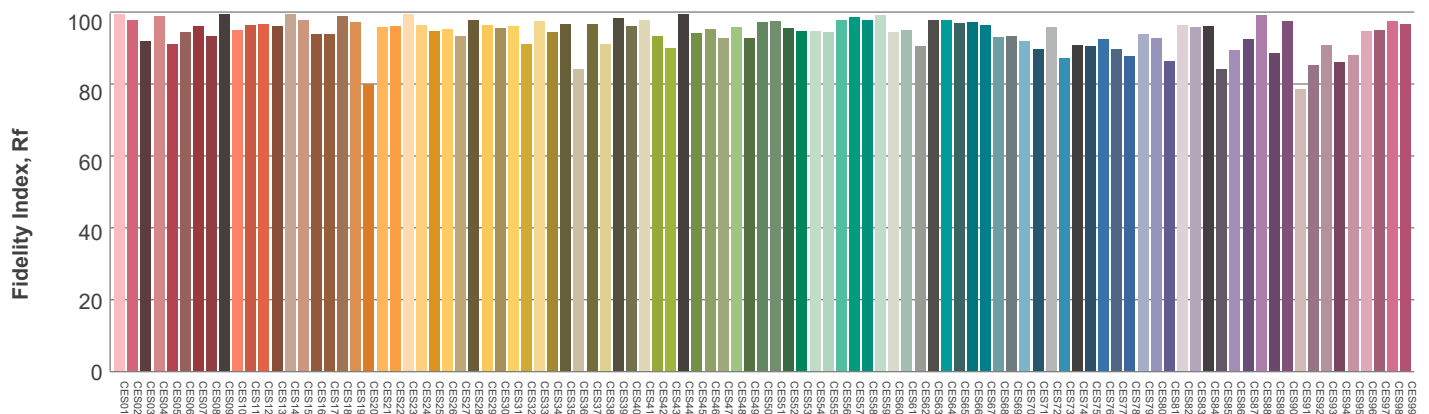

Color Evaluation Sample

Beam details

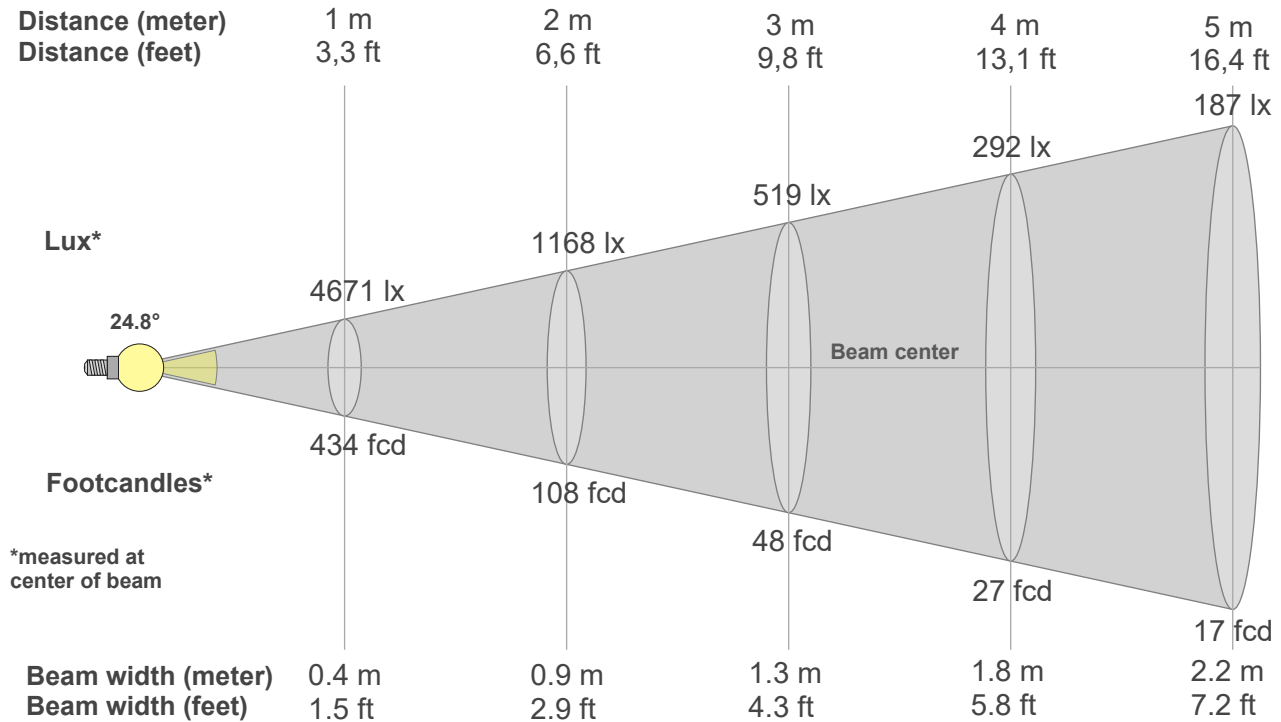

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4671lx	1168lx	519lx	292lx	187lx	130lx	95lx	73lx	58lx	47lx	39lx	32lx	28lx	24lx	21lx	18lx	16lx	14lx	13lx	12lx
433.9fcd	108.5fcd	48.2fcd	27.1fcd	17.4fcd	12.1fcd	8.9fcd	6.8fcd	5.4fcd	4.3fcd	3.6fcd	3fcd	2.6fcd	2.2fcd	1.9fcd	1.7fcd	1.5fcd	1.3fcd	1.2fcd	1.1fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4671	4669	4430	4064	3594	3048	2458	1878	1369	954	640	417	275	187	126	85	57	39	25	15
100%	100%	95%	87%	77%	65%	53%	40%	29%	20%	14%	9%	6%	4%	3%	2%	1%	1%	1%	0%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4671	4669	4430	4064	3594	3048	2458	1878	1369	954	640	417	275	187	126	85	57	39	25	15
100%	100%	95%	87%	77%	65%	53%	40%	29%	20%	14%	9%	6%	4%	3%	2%	1%	1%	1%	0%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4671	4669	4430	4064	3594	3048	2458	1878	1369	954	640	417	275	187	126	85	57	39	25	15
100%	100%	95%	87%	77%	65%	53%	40%	29%	20%	14%	9%	6%	4%	3%	2%	1%	1%	1%	0%


Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4671	4669	4430	4064	3594	3048	2458	1878	1369	954	640	417	275	187	126	85	57	39	25	15
100%	100%	95%	87%	77%	65%	53%	40%	29%	20%	14%	9%	6%	4%	3%	2%	1%	1%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
24.8°	42.9°	56.8°	99.2%	98.9%

LAMPS (number of lamps)
50

Light planning Luminaire budgetary diagram

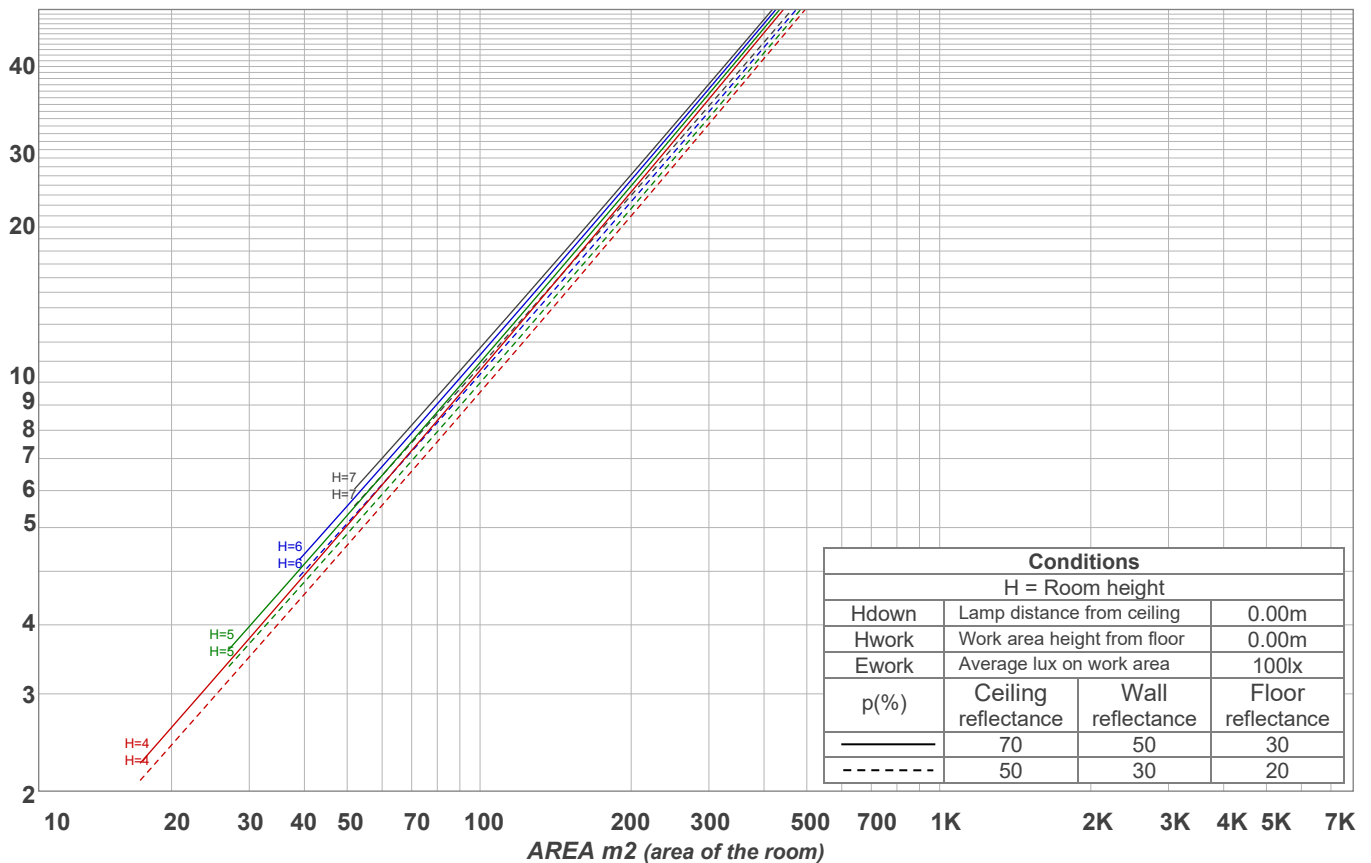

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	108	107	105	104	103	102	101	100	99	98	97
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	98	96	95	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	91
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	88
5	102	96	92	89	101	95	92	89	94	91	88	92	90	88	91	89	87	86
6	99	93	89	86	98	93	89	86	91	88	86	90	87	85	89	86	85	83
7	97	90	86	84	96	90	86	83	89	86	83	88	85	83	87	84	82	81
8	94	88	84	81	93	87	84	81	87	83	81	86	83	81	85	82	80	79
9	92	86	82	79	91	85	82	79	84	81	79	84	81	79	83	80	78	77
10	90	83	80	77	89	83	79	77	82	79	77	82	79	77	81	78	76	76

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
368 lm	441 lm	117 lm	21.5 lm	2.79 lm	1.91 lm	2.31 lm	2.46 lm	2.93 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

www.specialty-lighting.com As a result of our continuous improvement, values are subject to change without notice. These are delivered results and can vary +/- 10% from published source data range.