

Light efficiency:

78 Lumen/Watt

Output: 1310 lm

Light quality:


CRI: 96.1

Peak: 5213 cd

Power: 16.8 W



Beam angle

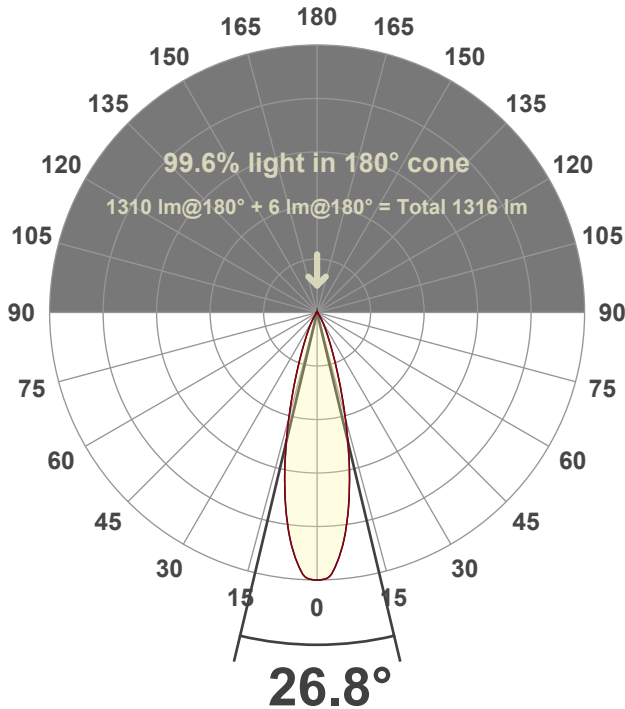

Test number:

CR4D-RA-OR-Z-T15-TW1840-24

Luminaire Model:

CORE 4" ROUND OPEN REGRESS T15-1840-24°

Date and time:

8/22/2025 11:30:59 AM

LUM: 1310


Primary Optic 24° = 26.8°

2940 K


Measured at Mid-Point of Tuneable White CCT Range

*Variation due to source size, bezel geometry, or secondary optics

Spectra

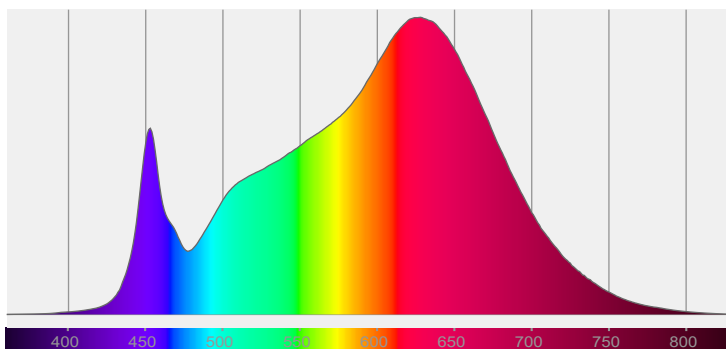

CRI: 96.1 (R1-R8)

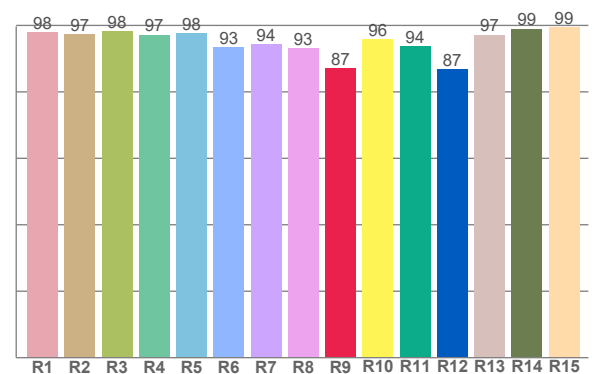

Color parameters

	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	96.1	87.2	94.1	103.0	93.8	0.434	0.390	0.255	0.343	-0.0054

R_f 94.1


Fidelity index R_f

R_g 103.0


Gammut index R_g

TM30: 94.1



TM-30Color

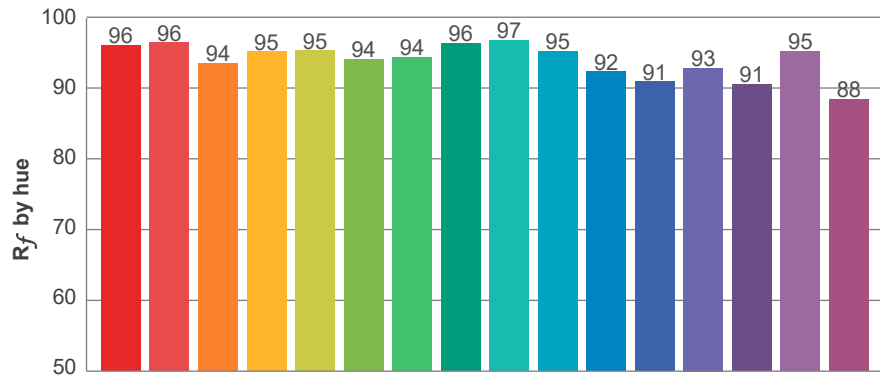

Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	96	-2%	0%
2	96	0%	1%
3	94	1%	3%
4	95	0%	0%
5	95	1%	2%
6	94	4%	0%
7	94	1%	-1%
8	96	2%	-1%
9	97	1%	1%
10	95	1%	3%
11	92	3%	5%
12	91	5%	0%
13	93	3%	-4%
14	91	4%	-6%
15	95	0%	-2%
16	88	1%	-9%

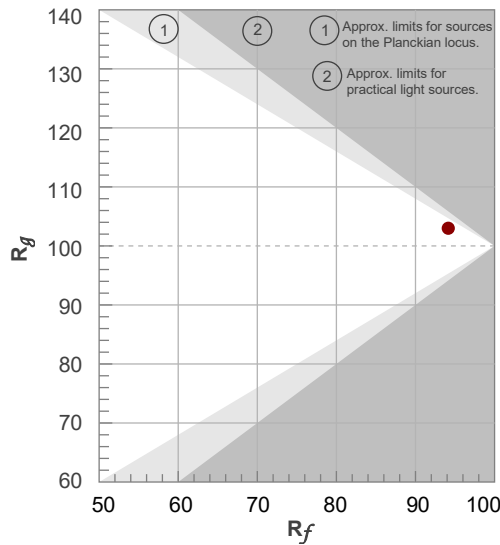


Color vector graphics

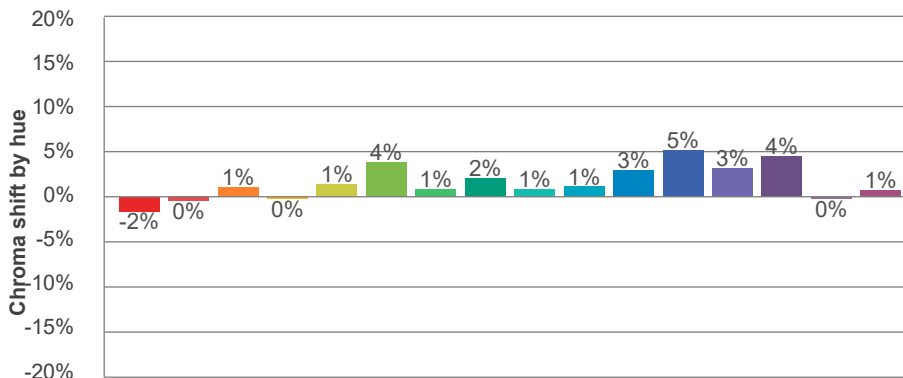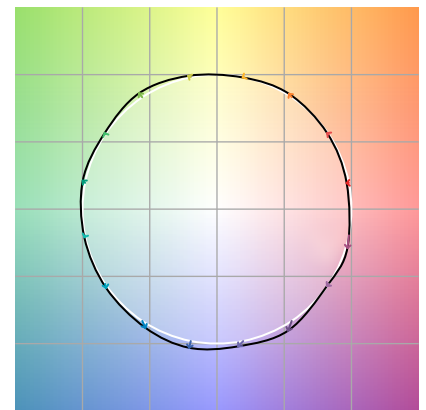

Color distortion




Hue bin

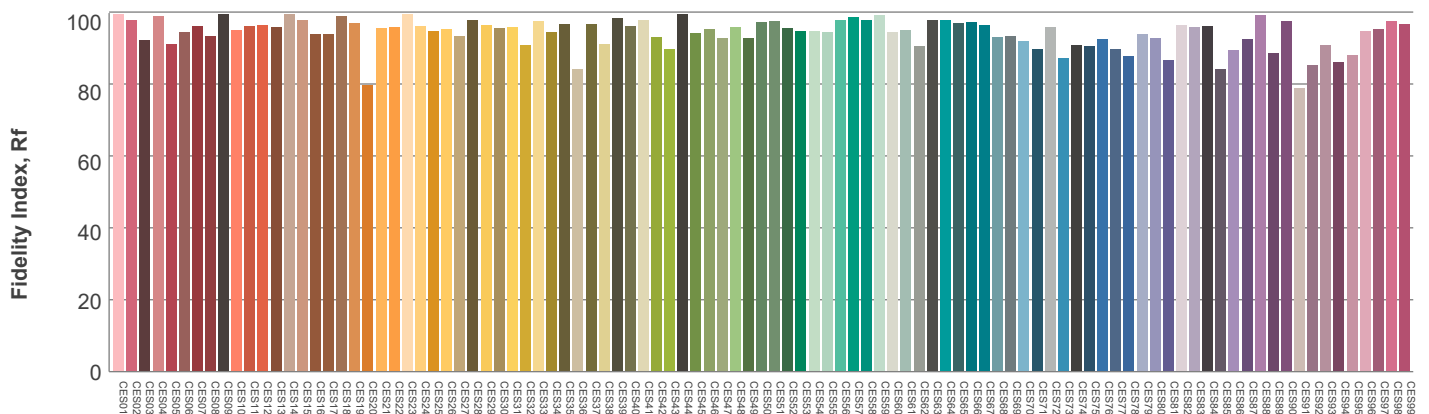

Color Evaluation Sample

Beam details

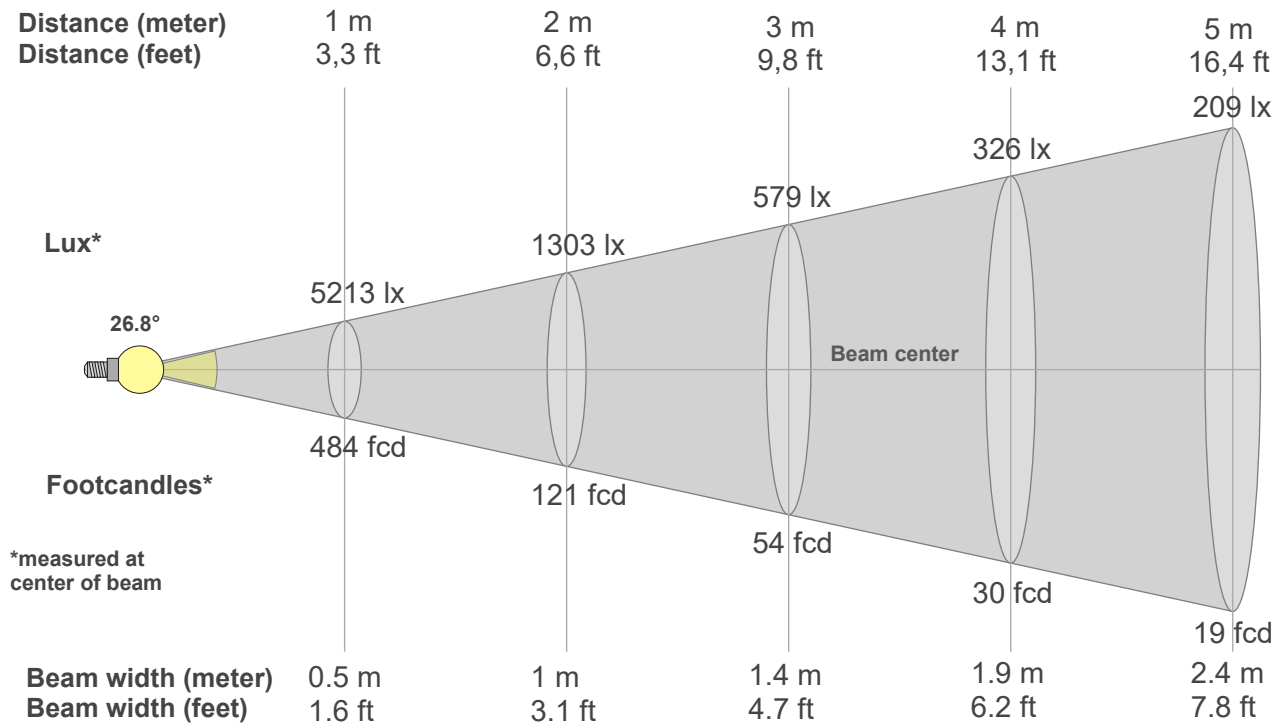

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
5213lx	1303lx	579lx	326lx	209lx	145lx	106lx	81lx	64lx	52lx	43lx	36lx	31lx	27lx	23lx	20lx	18lx	16lx	14lx	13lx
484.3fcd	121.1fcd	53.8fcd	30.3fcd	19.4fcd	13.5fcd	9.9fcd	7.6fcd	6fcd	4.8fcd	4fcd	3.4fcd	2.9fcd	2.5fcd	2.2fcd	1.9fcd	1.7fcd	1.5fcd	1.3fcd	1.2fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
5213	5213	4988	4630	4165	3621	3030	2428	1868	1399	1026	746	545	401	295	218	153	102	65	39
100%	100%	96%	89%	80%	69%	58%	47%	36%	27%	20%	14%	10%	8%	6%	4%	3%	2%	1%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
5213	5213	4988	4630	4165	3621	3030	2428	1868	1399	1026	746	545	401	295	218	153	102	65	39
100%	100%	96%	89%	80%	69%	58%	47%	36%	27%	20%	14%	10%	8%	6%	4%	3%	2%	1%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
5213	5213	4988	4630	4165	3621	3030	2428	1868	1399	1026	746	545	401	295	218	153	102	65	39
100%	100%	96%	89%	80%	69%	58%	47%	36%	27%	20%	14%	10%	8%	6%	4%	3%	2%	1%	1%


Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
5213	5213	4988	4630	4165	3621	3030	2428	1868	1399	1026	746	545	401	295	218	153	102	65	39
100%	100%	96%	89%	80%	69%	58%	47%	36%	27%	20%	14%	10%	8%	6%	4%	3%	2%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
26.8°	48.6°	65.6°	99.1%	98.7%

LAMPS (number of lamps)
50

Light planning Luminaire budgetary diagram

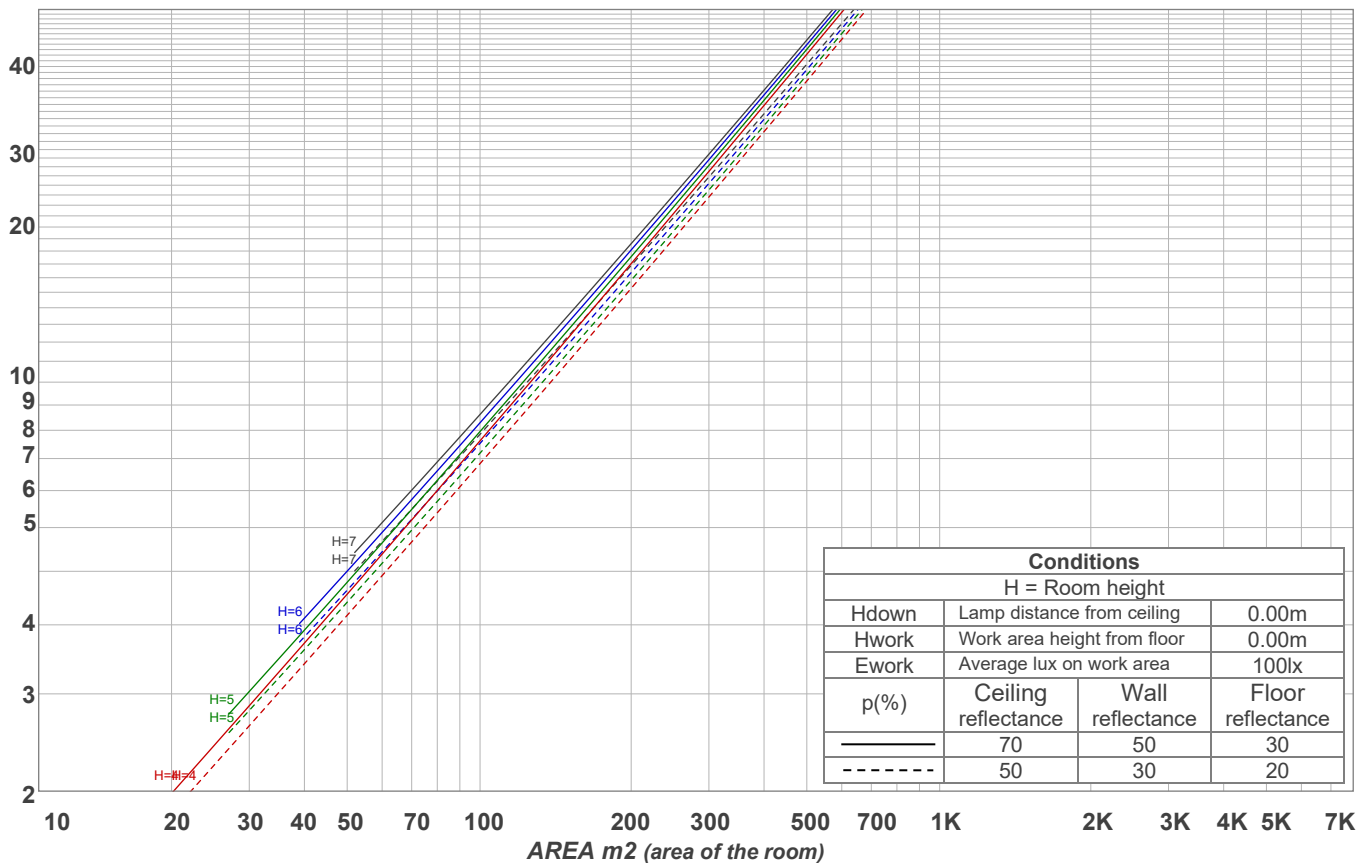

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92
3	107	102	98	95	105	101	97	95	98	96	93	96	94	92	94	92	90	89
4	104	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	86
5	100	94	90	87	99	93	89	86	92	88	86	90	87	85	89	86	84	83
6	97	91	87	83	96	90	86	83	89	85	83	88	85	82	86	84	82	81
7	94	88	83	80	93	87	83	80	86	82	80	85	82	79	84	81	79	78
8	92	85	81	78	91	84	80	78	84	80	77	83	79	77	82	79	77	76
9	89	82	78	75	88	82	78	75	81	77	75	80	77	75	80	77	74	74
10	87	80	76	73	86	80	76	73	79	75	73	78	75	73	78	75	72	71

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
423 lm	584 lm	225 lm	56.7 lm	6.18 lm	3.27 lm	3.63 lm	4.26 lm	4.50 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

www.specialty-lighting.com As a result of our continuous improvement, values are subject to change without notice. These are delivered results and can vary +/- 10% from published source data range.