

Light efficiency:

71 Lumen/Watt

Light quality:

CRI: 92.6

Color temperature:


3017 K

Output: 3069 lm


Peak: 10647 cd

Power: 43.4 W

PF: 0.99

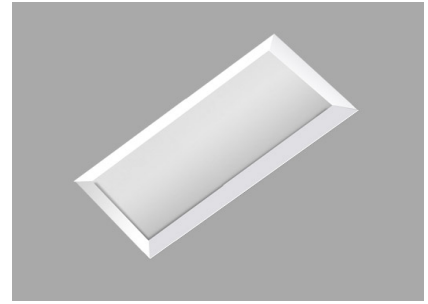

*Variation due to source size, bezel geometry, or secondary optics

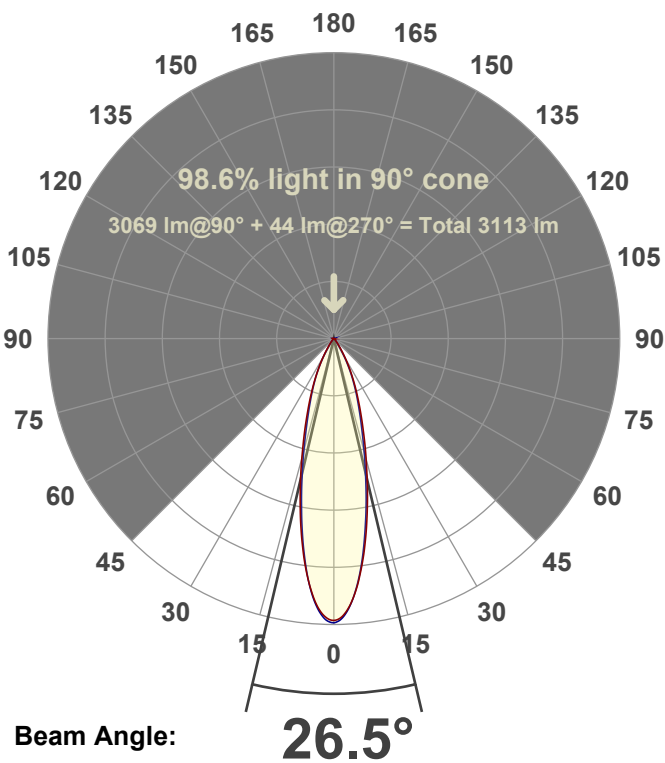

Product name:

CR4MD-TMHA-OR2-CZ20-24

Item number:


1017-2 LEDZ-CZ20-NF

Date and time:


10/3/2024 1:12:36 PM

LUM: 3069


CRI: 92.6 (R1-R8)


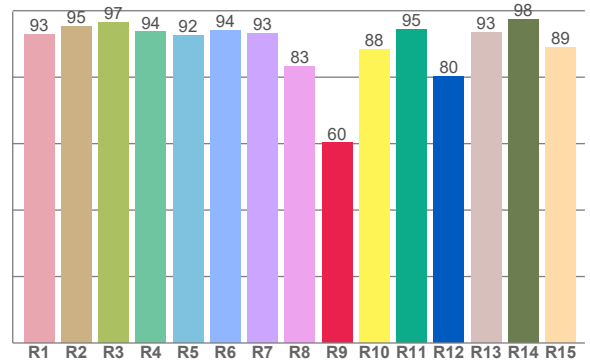


Spectra

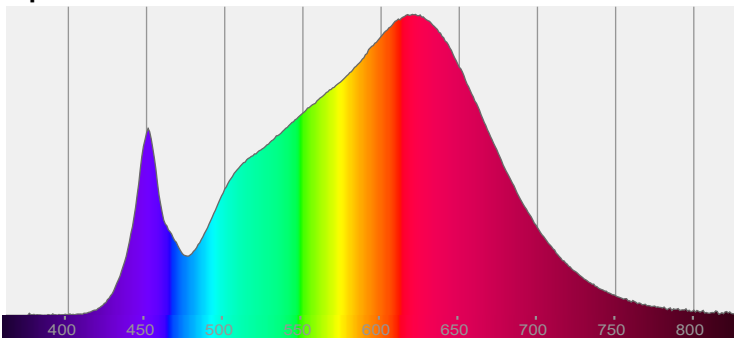


Power

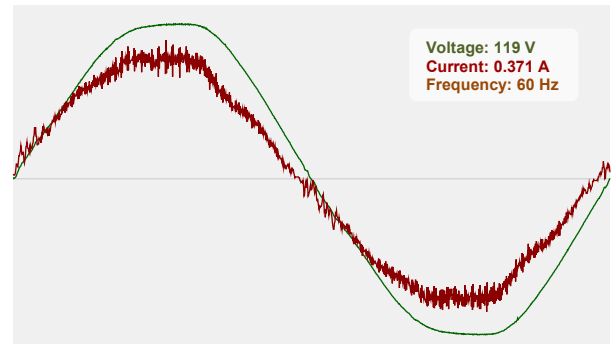


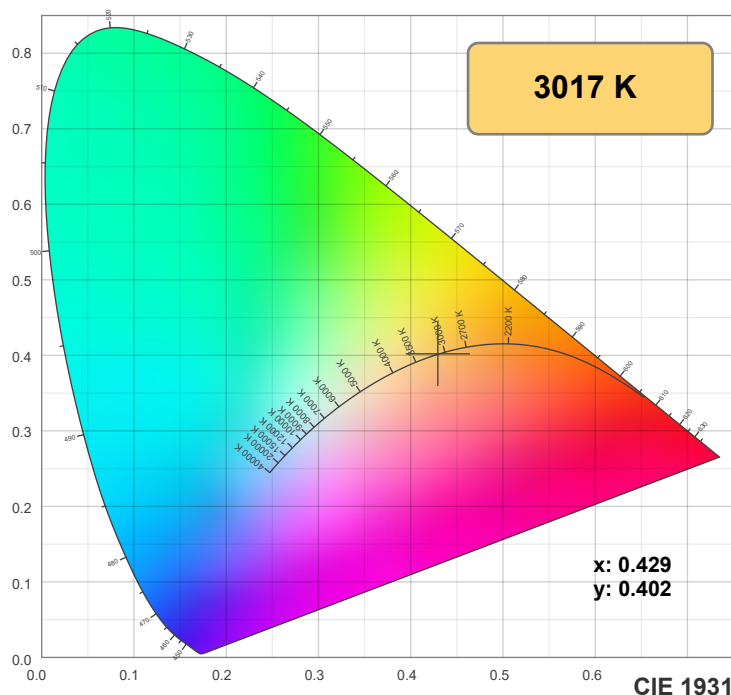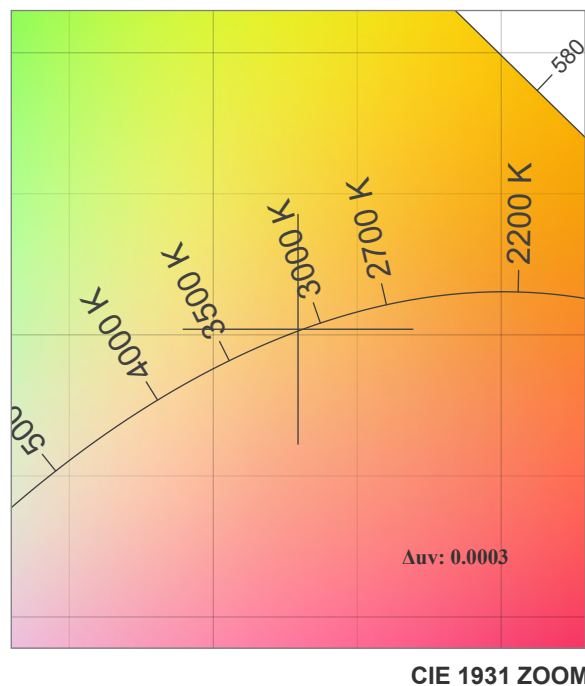

TM-30: 91.9

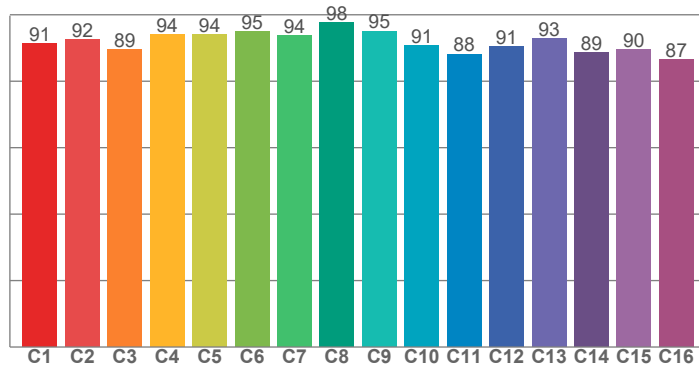

CRI: 92.6 (R1-R8)

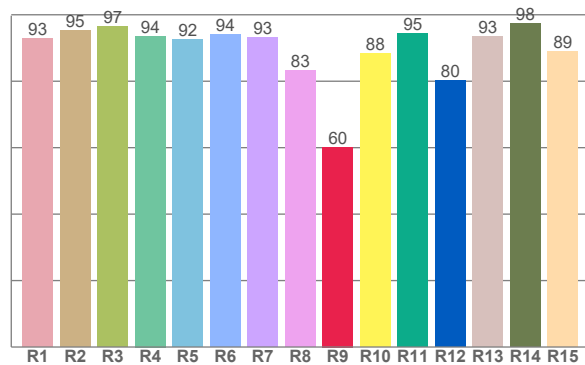

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.8	95.3	96.6	93.6	92.4	94.0	93.1	83.2	60.2	88.3	94.5	80.4	93.4	97.5	88.9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91.3	92.5	89.4	94.0	94.0	95.0	93.8	97.7	95.1	90.8	88.2	90.5	92.8	88.6	89.6	86.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89.0	96.9	88.0	89.0	91.9	91.5	91.2	93.2	97.7	93.6	93.2	92.9	92.7	87.1	87.6

CQS: 91.0

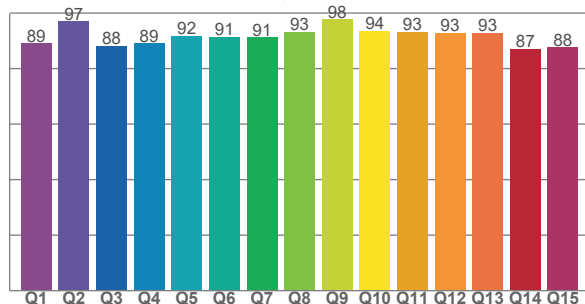

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3017 K	92.6	60.2	91.9	100.3	91.0	0.429	0.402	0.247	0.346	0.0003







Rf 91.9


Fidelity index Rf

Rg 100.3

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	91	-5%	-1%
2	92	-3%	3%
3	89	-1%	5%
4	94	0%	3%
5	94	0%	3%
6	95	3%	-0%
7	94	-1%	-3%
8	98	-0%	-1%
9	95	-2%	1%
10	91	-2%	5%
11	88	1%	8%
12	91	5%	2%
13	93	4%	-3%
14	89	5%	-8%
15	90	0%	-7%
16	87	-1%	-11%

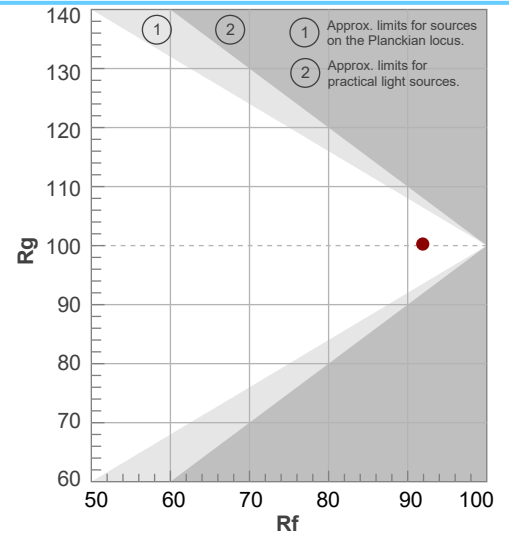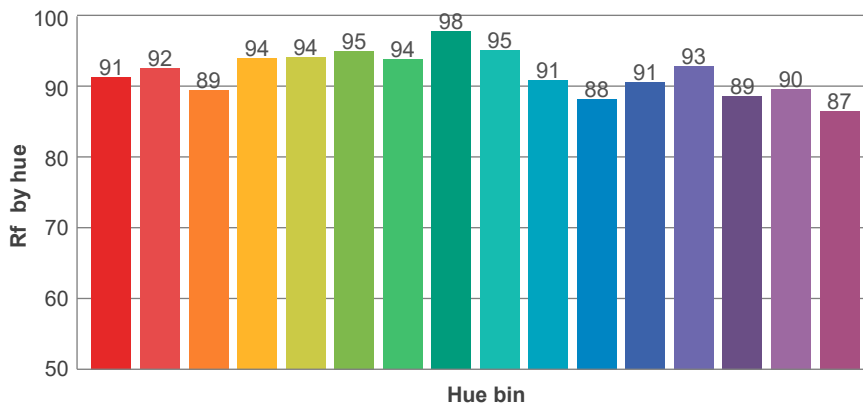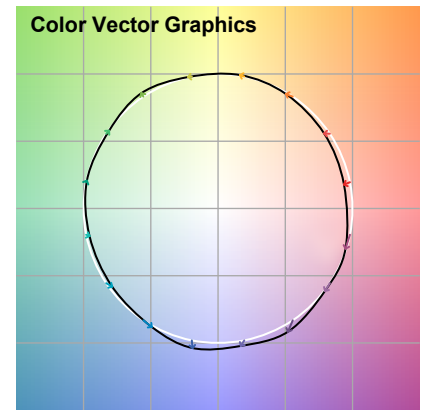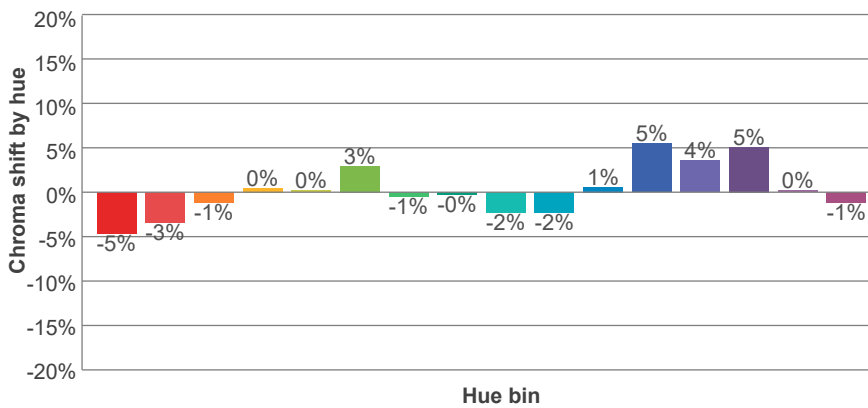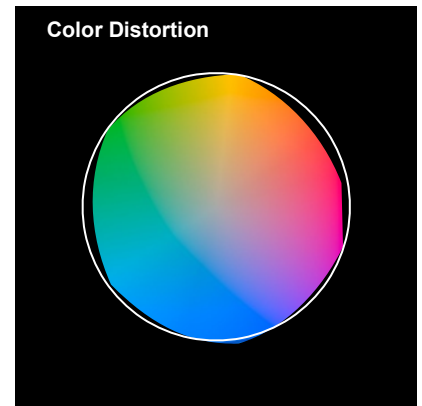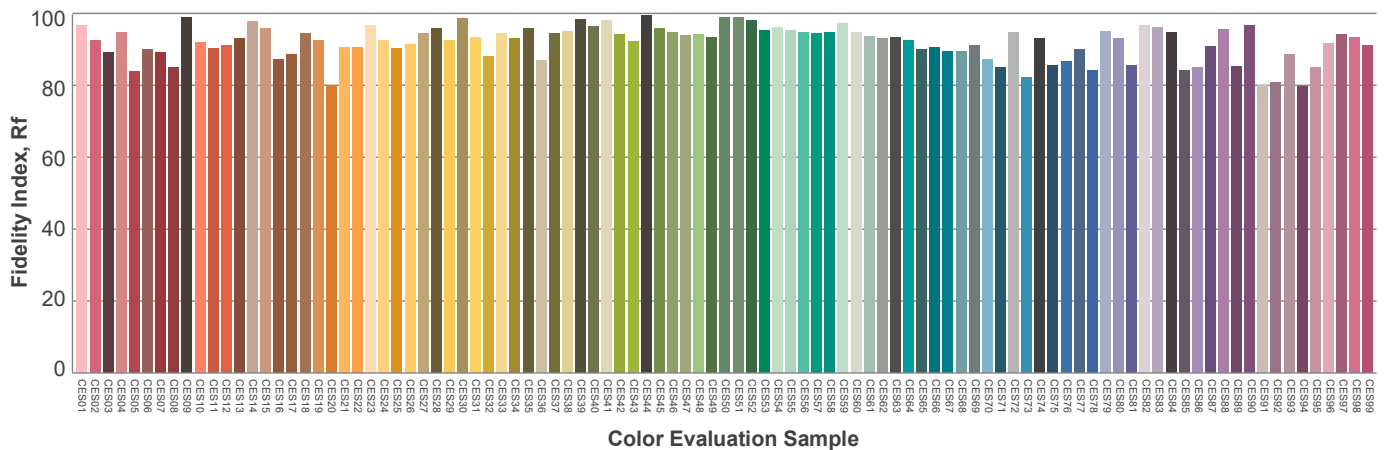

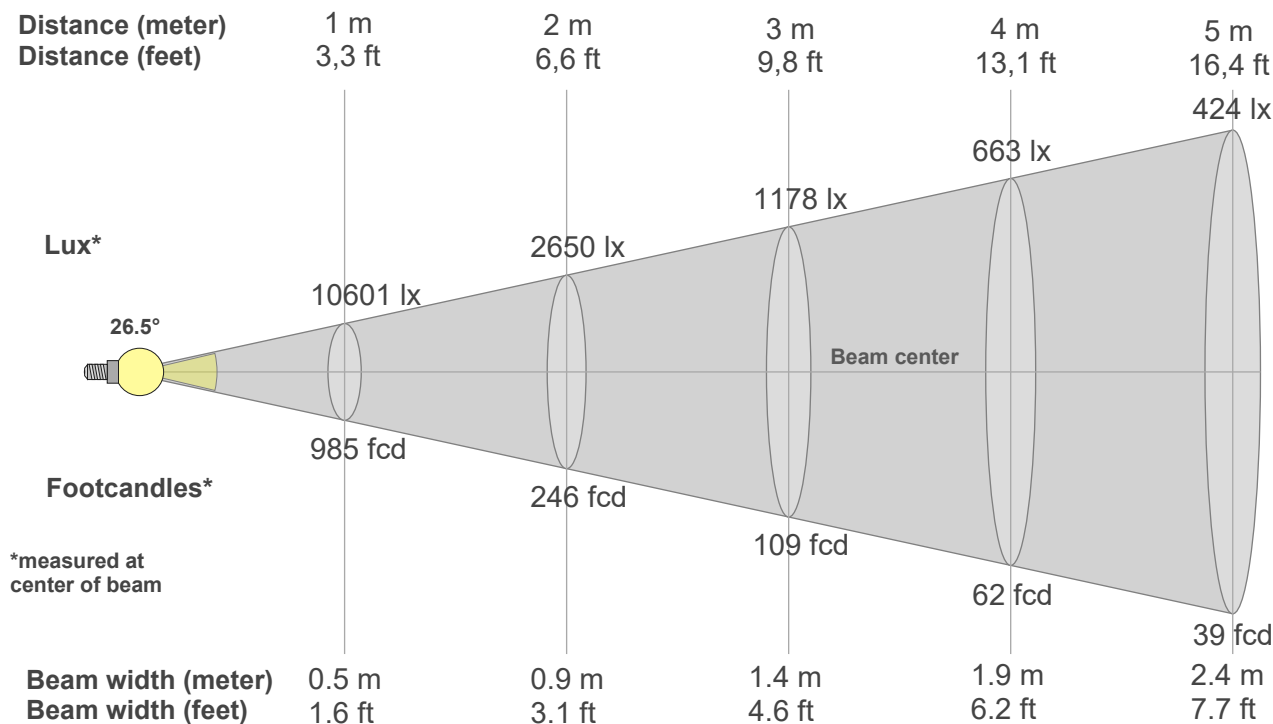

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
10601lx	2650lx	1178lx	663lx	424lx	294lx	216lx	166lx	131lx	106lx	88lx	74lx	63lx	54lx	47lx	41lx	37lx	33lx	29lx	27lx
984.8fcd	246.2fcd	109.4fcd	61.6fcd	39.4fcd	27.4fcd	20.1fcd	15.4fcd	12.2fcd	9.8fcd	8.1fcd	6.8fcd	5.8fcd	5fcd	4.4fcd	3.8fcd	3.4fcd	3fcd	2.7fcd	2.5fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
10.6k	10.4k	9.8k	9.0k	8.1k	7.1k	6.1k	5.1k	4.3k	3.5k	2.9k	2.4k	2.0k	1.6k	1.2k	0.9k	0.6k	0.4k	0.3k	0.2k
100%	98%	93%	85%	76%	67%	57%	48%	40%	33%	28%	23%	18%	15%	11%	8%	6%	4%	3%	2%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
10.6k	10.4k	9.8k	9.0k	8.0k	6.9k	5.8k	4.8k	4.0k	3.3k	2.7k	2.3k	1.8k	1.4k	1.1k	0.8k	0.5k	0.3k	0.2k	0.1k
100%	98%	93%	85%	75%	65%	55%	45%	37%	31%	26%	21%	17%	14%	10%	7%	5%	3%	2%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
10.6k	10.4k	9.9k	9.1k	8.2k	7.1k	6.1k	5.1k	4.2k	3.5k	2.8k	2.3k	1.9k	1.5k	1.1k	0.8k	0.6k	0.4k	0.3k	0.2k
100%	98%	93%	86%	77%	67%	57%	48%	40%	33%	27%	22%	18%	14%	11%	8%	5%	4%	2%	2%


Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
10.6k	10.5k	9.9k	9.1k	8.1k	6.9k	5.8k	4.8k	3.9k	3.2k	2.6k	2.2k	1.8k	1.4k	1.1k	0.7k	0.5k	0.3k	0.2k	0.1k
100%	99%	94%	86%	76%	65%	55%	45%	37%	30%	25%	21%	17%	13%	10%	7%	5%	3%	2%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
26.5°	56.7°	70.9°	100.0%	100.0%

LAMPS (number of lamps)

Luminaire Budgetary Diagram

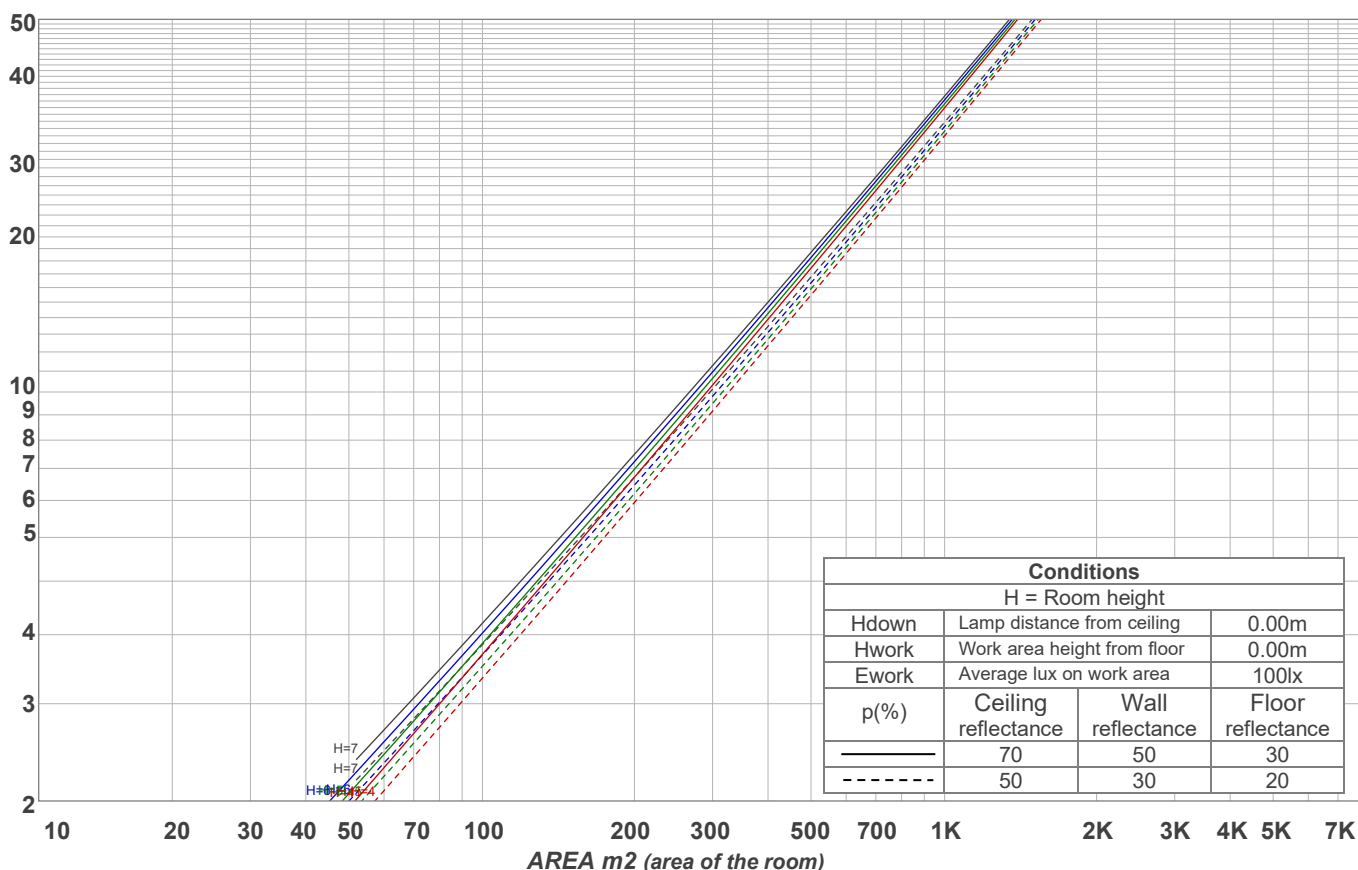

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	109	112	110	108	107	106	105	104	103	102	101	99	98	98	96
2	111	107	103	101	108	105	102	100	102	99	97	99	97	95	96	95	93	92
3	107	101	98	94	105	100	97	94	98	95	92	95	93	91	93	91	90	88
4	103	97	93	89	101	96	92	89	94	90	88	92	89	87	90	88	86	85
5	99	93	88	85	98	92	88	85	90	87	84	89	86	83	87	85	82	81
6	96	89	84	81	95	88	84	81	87	83	80	86	82	80	84	82	79	78
7	93	85	81	78	91	85	81	77	84	80	77	83	79	77	82	79	76	75
8	90	82	78	75	89	82	77	74	81	77	74	80	76	74	79	76	74	73
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
824 lm	1250 lm	759 lm	210 lm	26.0 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

www.specialty-lighting.com As a result of our continuous improvement, values are subject to change without notice. These are delivered results and can vary +/- 10% from published source data range.