


Light efficiency:



Output: 526 lm




Light quality:



Peak: 1563 cd

Power: 9.9 W

Beam angle

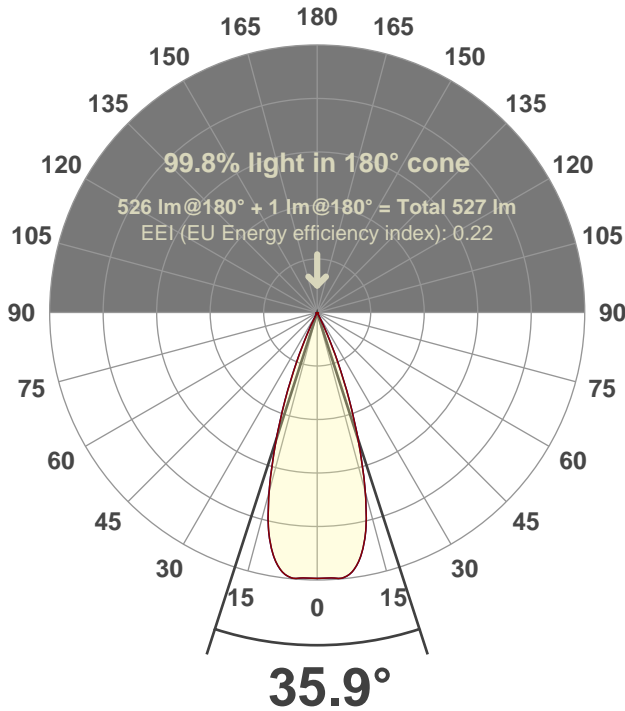

Test number:

SCW3D-R-T7-1840-36°-Rev1

Luminaire Model:

Scope Wonder 3" Round Downlight-T7-1840-36°

Date and time:


5/27/2021 3:23:10 PM

LUM: 526


Measured at Mid-Point of Tuneable White CCT Range



Spectra

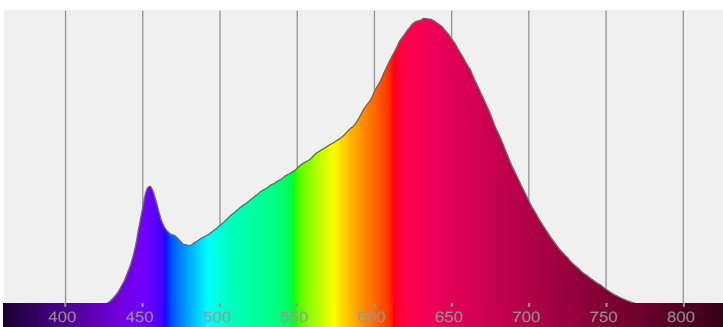

CRI: 95.3 (R1-R8)

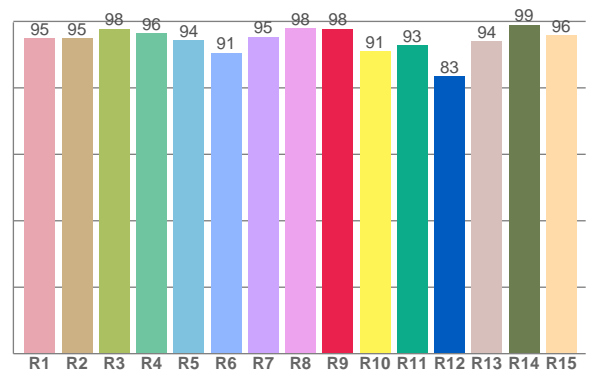

Color parameters


	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
	CRI	CRI R9	TM30 R _f	TM30 R _g	CQS	x	y	u	v	Δuv
	95.3	97.7	94.6	103.5	94.0	0.449	0.391	0.264	0.345	-0.0064

R_f 94.6
Fidelity index R_f


R_g 103.5
Gammut index R_g

TM30: 94.6



TM-30Color

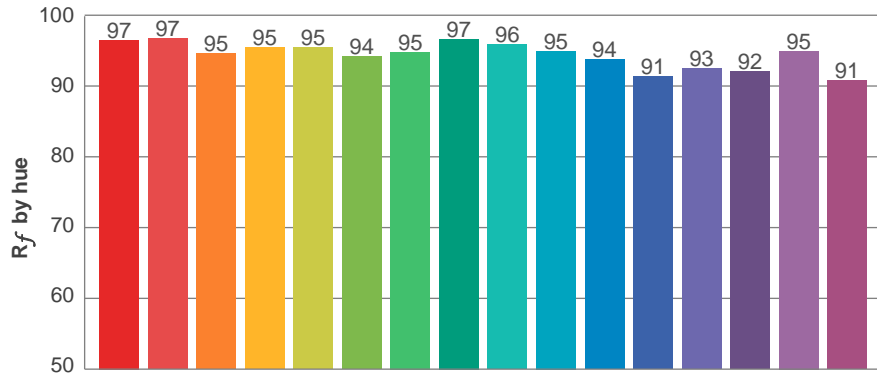



Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	97	0%	1%
2	97	1%	1%
3	95	2%	2%
4	95	0%	-1%
5	95	1%	1%
6	94	3%	0%
7	95	1%	0%
8	97	2%	-1%
9	96	2%	2%
10	95	2%	3%
11	94	4%	3%
12	91	5%	-2%
13	93	3%	-5%
14	92	3%	-5%
15	95	-1%	-1%
16	91	1%	-7%

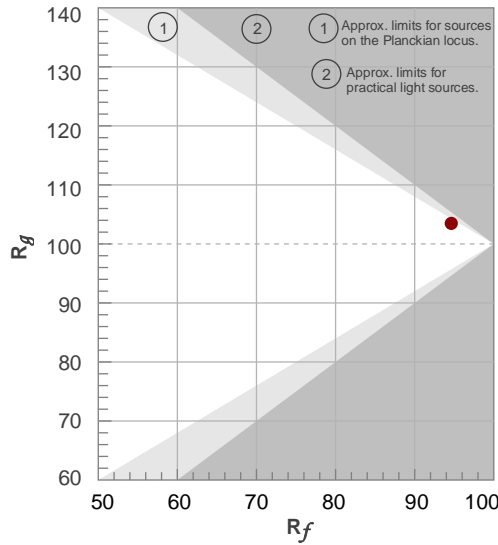


Color vector graphics

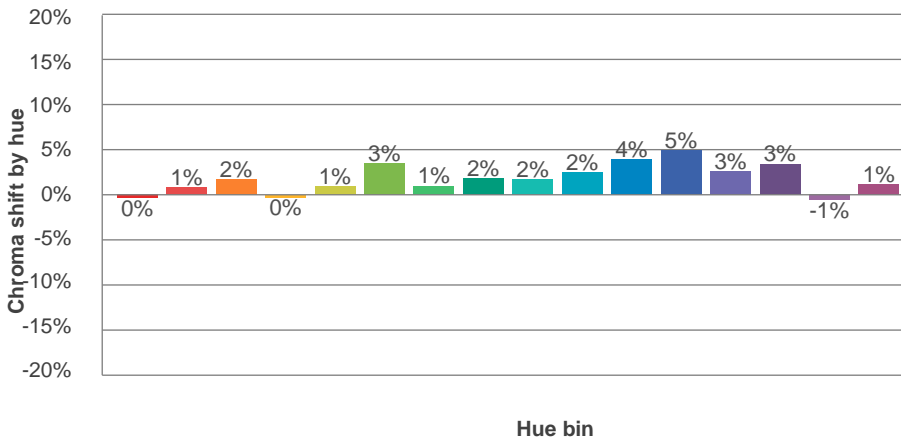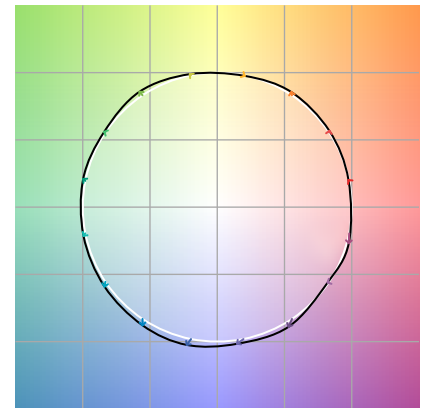

Color distortion

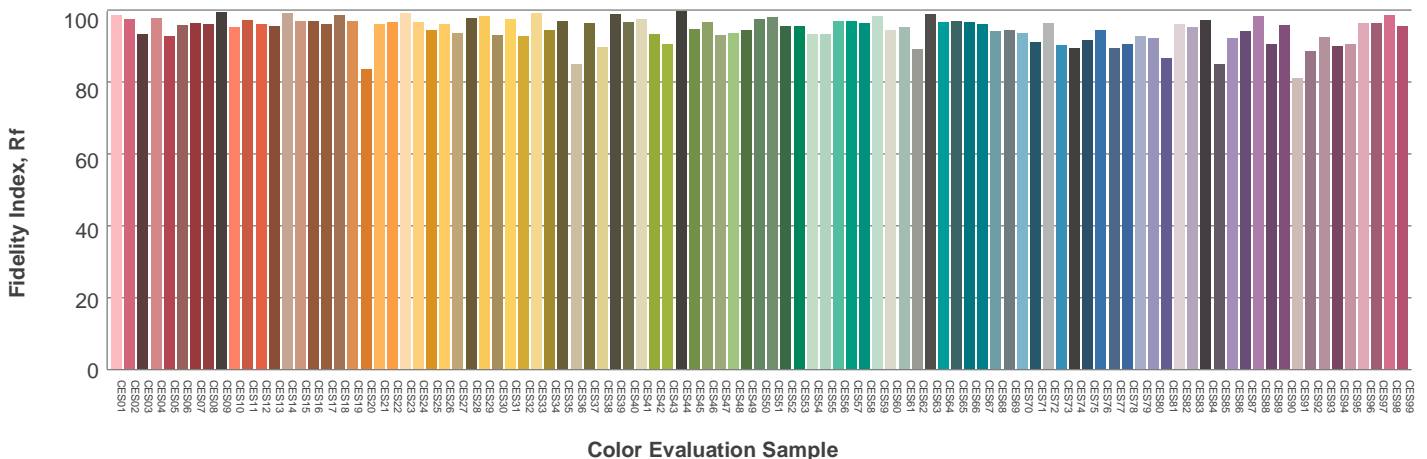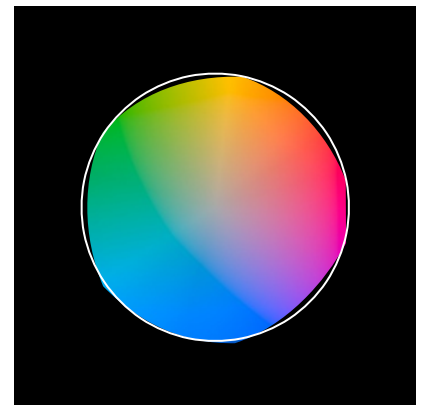

Beam details

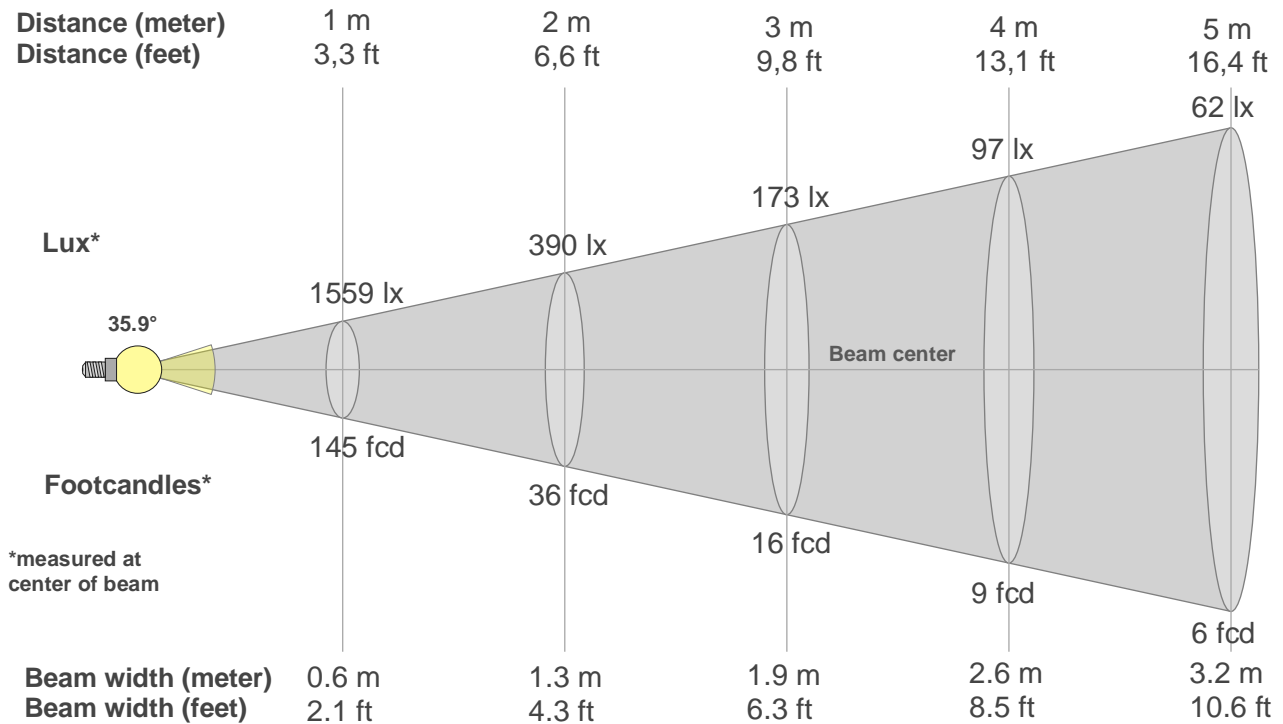

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1559lx	390lx	173lx	97lx	62lx	43lx	32lx	24lx	19lx	16lx	13lx	11lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx	4lx
144.8fcd	36.2fcd	16.1fcd	9.1fcd	5.8fcd	4fcd	3fcd	2.3fcd	1.8fcd	1.4fcd	1.2fcd	1fcd	0.9fcd	0.7fcd	0.6fcd	0.6fcd	0.5fcd	0.4fcd	0.4fcd	0.4fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1559	1559	1561	1556	1527	1454	1342	1184	988	774	570	381	223	106	36	14	10	7	5	4
100%	100%	100%	100%	98%	93%	86%	76%	63%	50%	37%	24%	14%	7%	2%	1%	1%	0%	0%	0%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1559	1559	1561	1556	1527	1454	1342	1184	988	774	570	381	223	106	36	14	10	7	5	4
100%	100%	100%	100%	98%	93%	86%	76%	63%	50%	37%	24%	14%	7%	2%	1%	1%	0%	0%	0%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1559	1559	1561	1556	1527	1454	1342	1184	988	774	570	381	223	106	36	14	10	7	5	4
100%	100%	100%	100%	98%	93%	86%	76%	63%	50%	37%	24%	14%	7%	2%	1%	1%	0%	0%	0%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1559	1559	1561	1556	1527	1454	1342	1184	988	774	570	381	223	106	36	14	10	7	5	4
100%	100%	100%	100%	98%	93%	86%	76%	63%	50%	37%	24%	14%	7%	2%	1%	1%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
35.9°	49.8°	55.4°	99.5%	99.3%

LAMPS (number of lamps)

50

Light planning Luminaire budgetary diagram

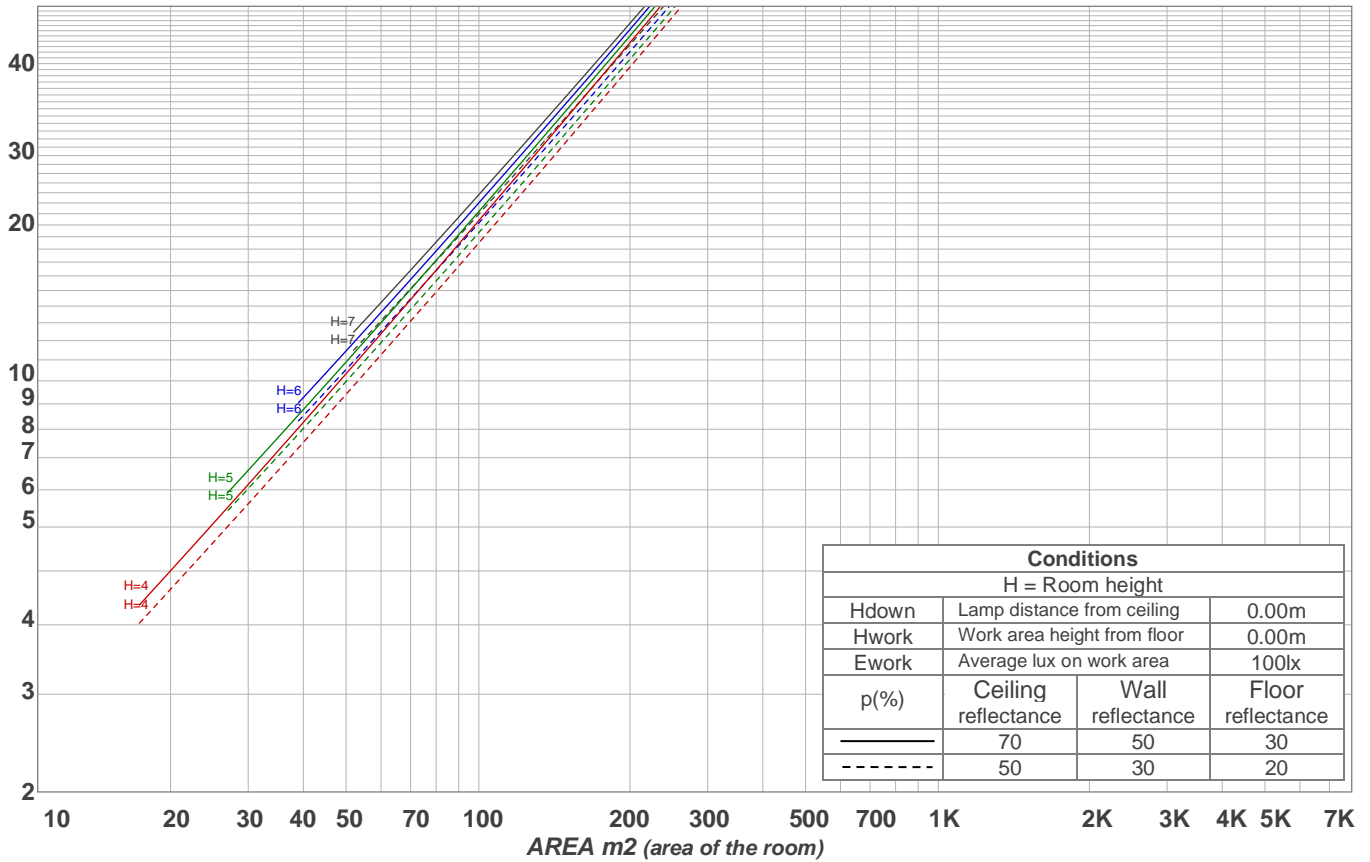

Luminaire budgetary diagram AREA m2 (area of the room) Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93
3	108	103	99	96	106	102	98	96	99	96	94	97	95	93	95	93	91	90
4	104	99	95	92	103	98	94	91	96	93	90	94	91	89	92	90	88	87
5	101	95	91	88	100	94	90	87	93	89	87	91	88	86	90	87	85	84
6	98	92	87	84	97	91	87	84	90	86	84	88	85	83	87	85	83	82
7	95	89	84	81	94	88	84	81	87	83	81	86	83	80	85	82	80	79
8	92	86	82	79	91	85	81	79	84	81	78	83	80	78	83	80	78	77
9	90	83	79	76	89	83	79	76	82	78	76	81	78	76	80	78	75	74
10	87	81	77	74	87	80	76	74	80	76	74	79	76	73	78	75	73	72

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
146 lm	287 lm	85.7 lm	4.06 lm	1.33 lm	0.573 lm	0.380 lm	0.417 lm	0.421 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	8.9	9.3	9.0	9.5	9.7	8.9	9.3	9.0	9.5	9.7
	3H	9.3	9.9	9.7	10.1	10.2	9.3	9.9	9.7	10.1	10.2
	4H	9.9	10.5	10.3	10.7	10.9	9.9	10.5	10.3	10.7	10.9
	6H	11.0	11.4	11.3	11.7	12.1	11.0	11.4	11.3	11.7	12.1
	8H	11.7	12.2	12.0	12.5	12.9	11.7	12.2	12.0	12.5	12.9
	12H	12.6	13.0	13.0	13.4	13.8	12.6	13.0	13.0	13.4	13.8
4H	2H	8.8	9.3	9.2	9.6	9.8	8.8	9.3	9.2	9.6	9.8
	3H	9.7	10.1	10.1	10.5	10.9	9.7	10.1	10.1	10.5	10.9
	4H	10.5	10.9	10.9	11.4	11.9	10.5	10.9	10.9	11.4	11.9
	6H	11.9	12.4	12.4	12.7	13.0	11.9	12.4	12.4	12.7	13.0
	8H	12.9	13.3	13.4	13.6	14.0	12.9	13.3	13.4	13.6	14.0
	12H	13.9	14.3	14.4	14.7	15.1	13.9	14.3	14.4	14.7	15.1
8H	4H	11.0	11.4	11.5	11.7	12.1	11.0	11.4	11.5	11.7	12.1
	6H	12.7	13.0	13.2	13.4	14.0	12.7	13.0	13.2	13.4	14.0
	8H	13.9	14.1	14.5	14.7	15.3	13.9	14.1	14.5	14.7	15.3
	12H	15.3	15.4	15.9	16.0	16.6	15.3	15.4	15.9	16.0	16.6
12H	4H	11.1	11.4	11.6	11.8	12.2	11.1	11.4	11.6	11.8	12.2
	6H	13.0	13.2	13.5	13.7	14.4	13.0	13.2	13.5	13.7	14.4
	8H	14.3	14.5	14.9	15.0	15.6	14.3	14.5	14.9	15.0	15.6
Corrected glare indices referring to 526 lm total luminous flux											