

Light efficiency:




Output: 2045 lm

Light quality:




Peak: 4455 cd

Power: 30.0 W

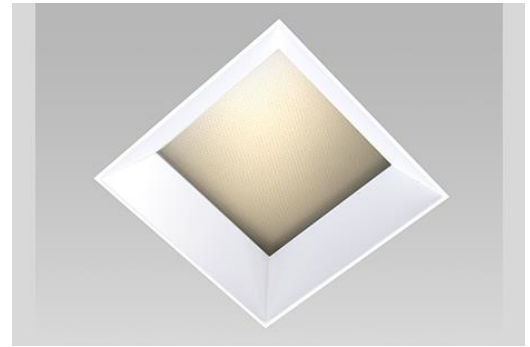

Beam angle

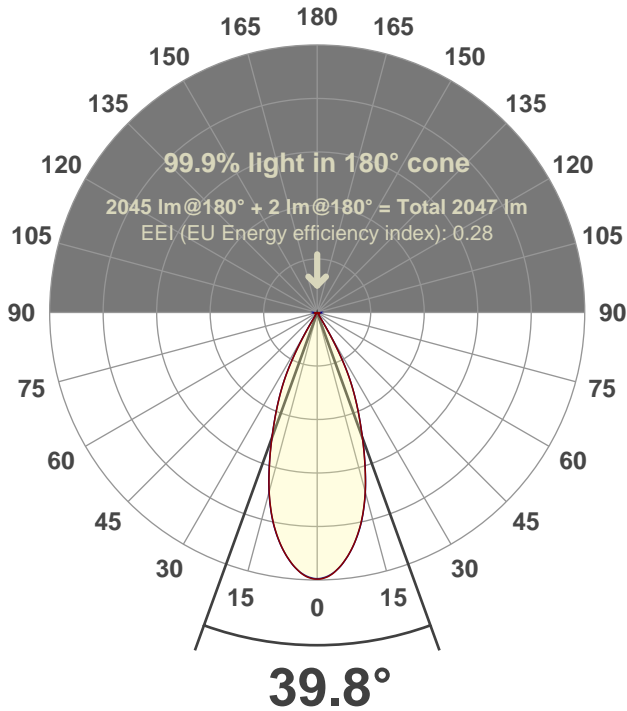

Test number:

CR4D-S-OR-C28-30k-40 (1017-CZ20-FL)

Luminaire Model:


Core 4" Square Open Regress C28 30K 40°

Date and time:


3/31/2017 1:48:55 PM

LUM: 2045

Spectra

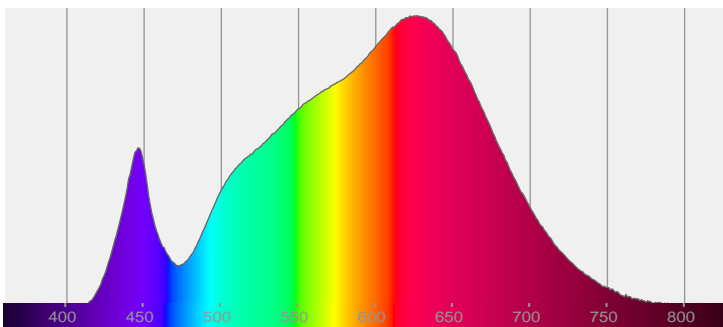

CRI: 92.4 (R1-R8)

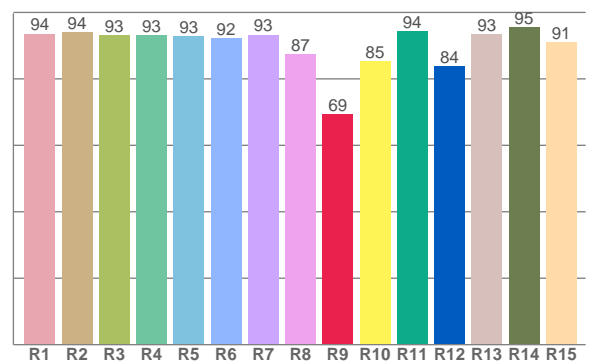

Color parameters


Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CRI	CRI R9	TM30 R <sub>f</sub>	TM30 R <sub>g</sub>	CQS	x	y	u	v	Δuv
92.4	69.3	90.3	103.1	90.2	0.429	0.400	0.247	0.346	-0.0006

**$R_f$  90.3**  
Fidelity index  $R_f$

---


**$R_g$  103.1**  
Gammut index  $R_g$

TM30: 90.3


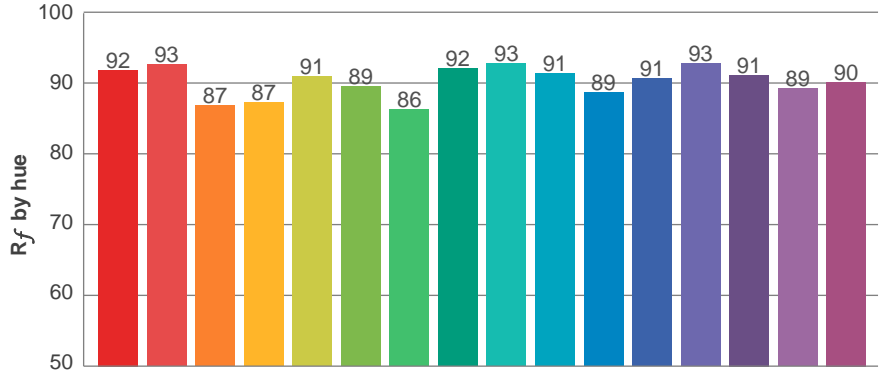


TM-30Color


Hue Bin	$R_f$	Graphic shifts (%)	
		Chroma	Hue
1	92	-3%	-3%
2	93	-3%	3%
3	87	0%	7%
4	87	4%	7%
5	91	6%	5%
6	89	7%	-1%
7	86	5%	-7%
8	92	1%	-5%
9	93	-2%	-4%
10	91	-4%	0%
11	89	-2%	6%
12	91	3%	4%
13	93	5%	0%
14	91	6%	-4%
15	89	3%	-6%
16	90	0%	-8%

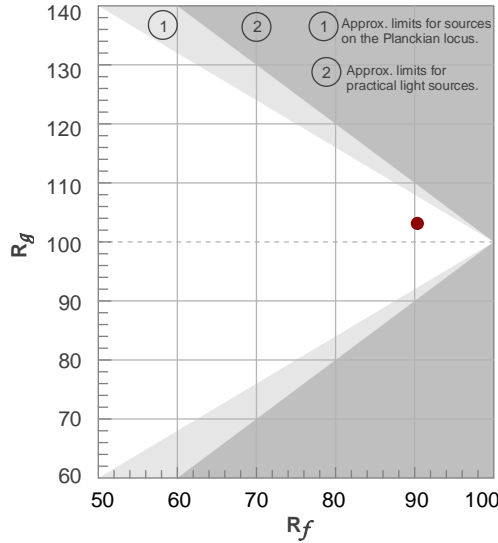


Color vector graphics

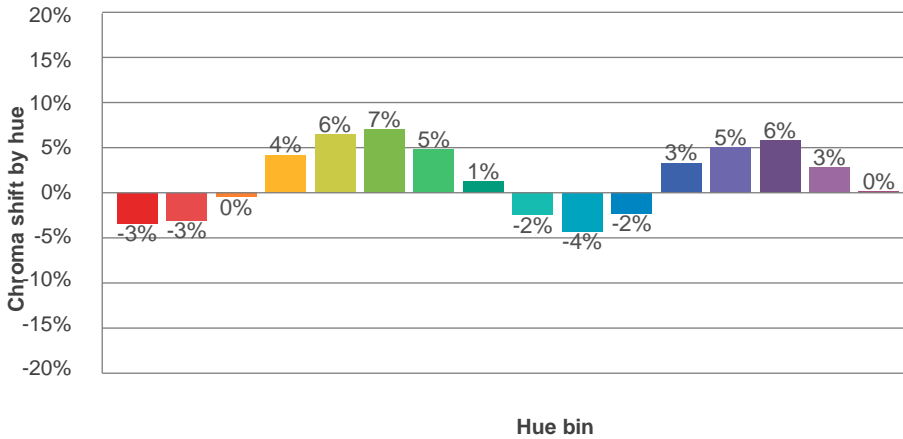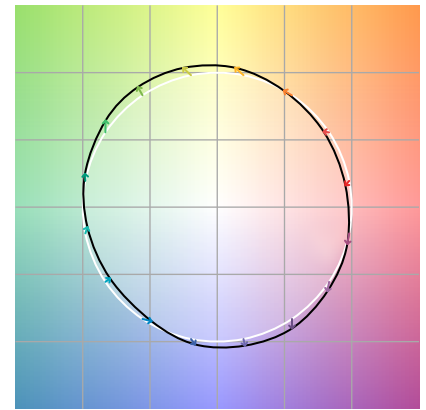

Color distortion

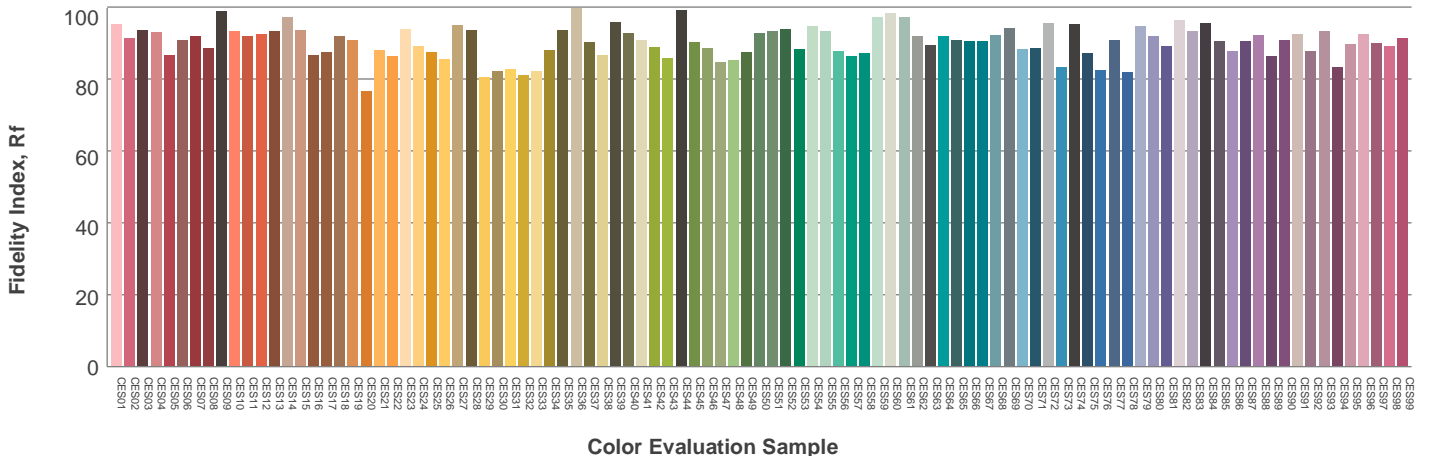

Beam details

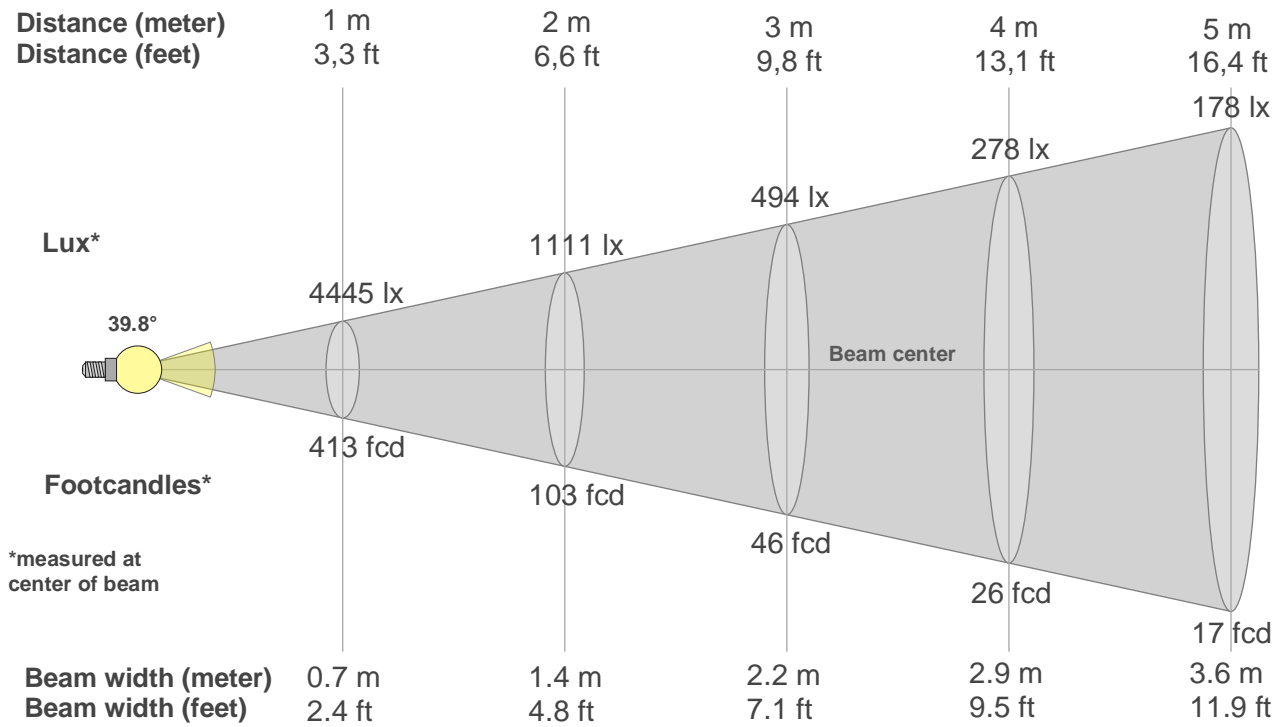

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4445lx	1111lx	494lx	278lx	178lx	123lx	91lx	69lx	55lx	44lx	37lx	31lx	26lx	23lx	20lx	17lx	15lx	14lx	12lx	11lx
413fcd	103.2fcd	45.9fcd	25.8fcd	16.5fcd	11.5fcd	8.4fcd	6.5fcd	5.1fcd	4.1fcd	3.4fcd	2.9fcd	2.4fcd	2.1fcd	1.8fcd	1.6fcd	1.4fcd	1.3fcd	1.1fcd	1fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4445	4427	4337	4199	4024	3810	3562	3268	2931	2568	2210	1881	1572	1265	901	503	179	74	55	46
100%	100%	98%	94%	91%	86%	80%	74%	66%	58%	50%	42%	35%	28%	20%	11%	4%	2%	1%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4445	4417	4335	4201	4025	3815	3568	3275	2940	2573	2215	1882	1573	1264	904	501	177	73	56	46
100%	99%	98%	95%	91%	86%	80%	74%	66%	58%	50%	42%	35%	28%	20%	11%	4%	2%	1%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4445	4427	4337	4199	4024	3810	3562	3268	2931	2568	2210	1881	1572	1265	901	503	179	74	55	46
100%	100%	98%	94%	91%	86%	80%	74%	66%	58%	50%	42%	35%	28%	20%	11%	4%	2%	1%	1%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4445	4417	4335	4201	4025	3815	3568	3275	2940	2573	2215	1882	1573	1264	904	501	177	73	56	46
100%	99%	98%	95%	91%	86%	80%	74%	66%	58%	50%	42%	35%	28%	20%	11%	4%	2%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
39.8°	63°	70.3°	99.3%	98.3%

Light planning

Luminaire budgetary diagram

LAMPS (number of lamps)  
50

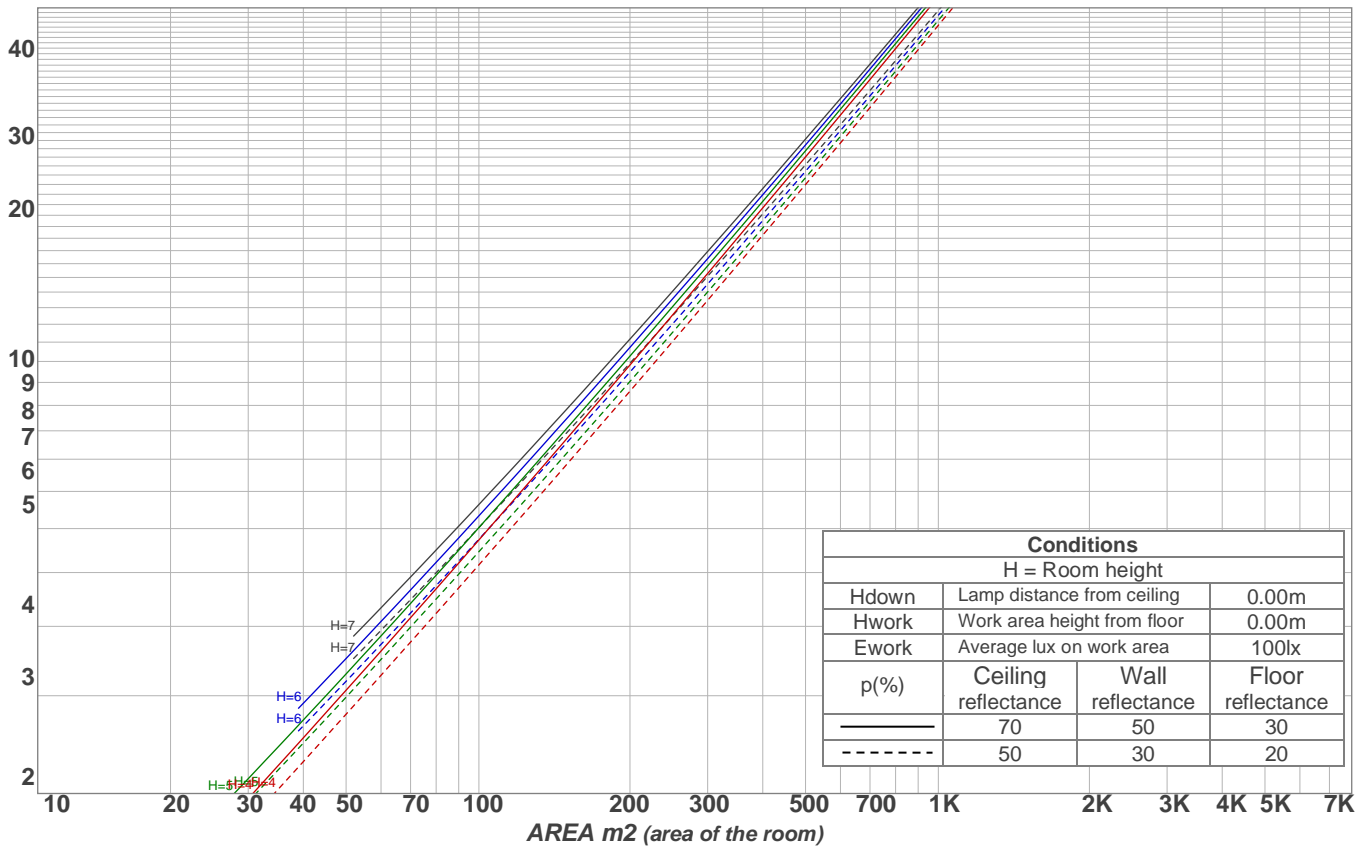

**Luminaire budgetary diagram**  
AREA m2 (area of the room)  
**Coefficients of Utilization**

Ceiling reflectance	80				70				50			30			10			0			
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
<b>RCR</b>	<b>(RCR: Room Cavity Ratio)</b>																				
	Room Values are expressed as percentage of Lumens delivered to the task surface																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	96	92	104	99	95	92	96	93	90	94	91	89	92	89	88	86	86	86	86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	84	88	86	83	82	82	82	82
5	97	90	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	78	78	78	78
6	94	86	81	78	92	86	81	78	84	80	77	83	79	77	82	78	76	75	75	75	75
7	90	82	78	74	89	82	77	74	81	77	73	80	76	73	79	75	73	72	72	72	72
8	87	79	74	71	86	78	74	71	77	73	70	77	73	70	76	72	70	69	69	69	69
9	84	76	71	68	83	75	71	67	74	70	67	74	70	67	73	69	67	66	66	66	66
10	81	73	68	65	80	72	68	65	72	67	65	71	67	64	70	67	64	63	63	63	63

**Zonal Lumen Summary**

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
393 lm	845 lm	636 lm	124 lm	23.9 lm	11.3 lm	6.73 lm	4.03 lm	1.91 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X    Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	24.6	25.1	24.7	25.3	25.5	24.6	25.1	24.7	25.3	25.5
	3H	24.5	25.1	24.8	25.3	25.5	24.6	25.3	25.0	25.5	25.6
	4H	24.5	25.2	24.9	25.4	25.6	24.7	25.4	25.1	25.6	25.8
	6H	24.7	25.2	25.0	25.5	25.9	25.0	25.5	25.2	25.8	26.1
	8H	24.7	25.2	25.0	25.5	25.9	25.0	25.5	25.3	25.8	26.2
	12H	24.7	25.2	25.1	25.6	26.0	25.0	25.5	25.4	25.9	26.3
4H	2H	24.4	25.0	24.8	25.2	25.5	24.4	25.0	24.8	25.3	25.5
	3H	24.6	25.1	24.9	25.4	25.8	24.7	25.2	25.1	25.6	26.0
	4H	24.6	25.1	25.1	25.5	26.0	24.9	25.3	25.3	25.8	26.3
	6H	24.8	25.3	25.3	25.6	26.0	25.1	25.6	25.6	25.9	26.3
	8H	24.9	25.3	25.4	25.7	26.0	25.2	25.6	25.7	26.0	26.3
	12H	24.9	25.3	25.4	25.7	26.1	25.3	25.7	25.8	26.1	26.5
8H	4H	24.7	25.1	25.2	25.5	25.8	24.9	25.4	25.4	25.7	26.1
	6H	24.9	25.2	25.4	25.7	26.2	25.2	25.5	25.7	26.0	26.5
	8H	25.1	25.3	25.6	25.8	26.5	25.4	25.6	25.9	26.2	26.8
	12H	25.2	25.4	25.8	25.9	26.5	25.6	25.8	26.2	26.3	26.9
12H	4H	24.6	25.0	25.1	25.4	25.8	24.9	25.2	25.4	25.6	26.1
	6H	25.0	25.2	25.5	25.7	26.4	25.3	25.5	25.8	26.0	26.6
	8H	25.1	25.3	25.7	25.8	26.4	25.4	25.6	26.0	26.1	26.7
Corrected glare indices referring to 2045 lm total luminous flux											