

The Yashar Family

The surface mounted Yashar Low Voltage 48 volt track is field cuttable and available in white or black painted finishes. This low profile track is single circuit w/ DALI control options for multi-zone configurations or 0-10V control for single zone dimming. The remote power supplies are available in a several wattages and can be powered at 120/277V. The Yashar Low Voltage version of track is also available for recessed and pendant applications. In addition to the low voltage version, Yashar Mains offers a 120/277V track solution w/ their own compatible track heads.

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (YSLT-S)

Housing



- Extruded aluminum surface mounted single circuit track is available in six profiles w/ standard lengths of 4 foot (1200cm) and 8 foot (2400cm) and field cuttable to custom lengths.
- Track system components include end caps, end and joiner feeds, straight joiners, corner joiners, T-joiners and X-joiners.
- Available in black or white painted finishes

Electrical And Dimming Configurations

- 48V track is furnished in a single circuit configuration, dimmable via DALI or 0-10V controls using the second pair of conductors to carry data (DALI) or the 0-10V signal. DALI control allows control of individual fixtures on the track, allowing for multiple control zones on a single track. The 0-10V dimming controls all fixtures on the track as a single control zone.
- Remote 48V DC power supplies are Universal (120/277V) on the supply side and available in 40, 60, 100, 150, 185 and 240 watts.


For other wattages consult factory

48V Track Options

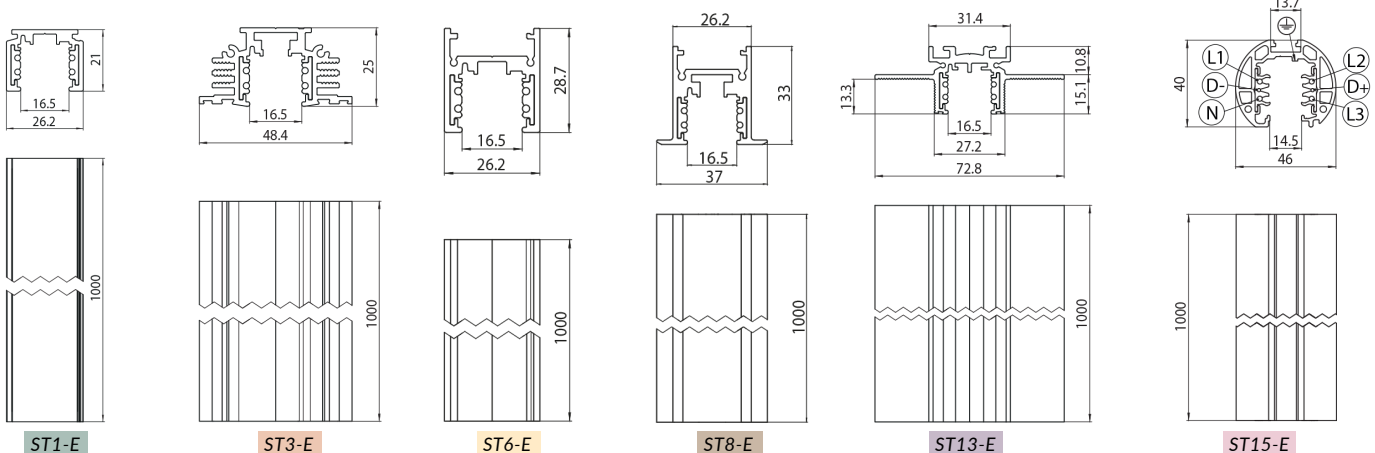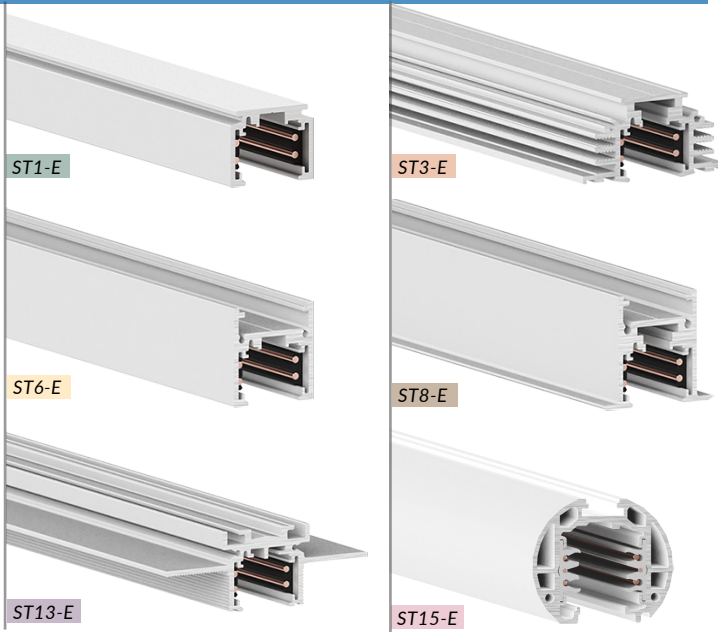


(Cont.)

Surface Mounted Track Configuration
ST1-E Profile

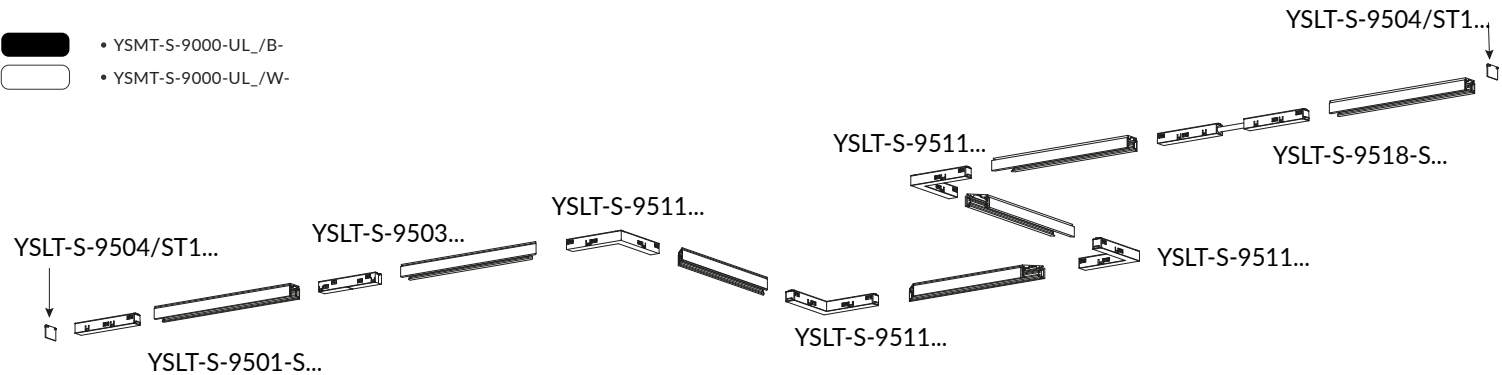

Ordering Code Example for surface mounted L configuration, White track w/ 7ftx 3ft long leg w/ a 100 watt remote 48 Volt power supply:

- | | | |
|---|-------------------------------------|---|
| (1) YSLT-S-9500-UL8/W2-ST1-E
(8ft long track to be field cut to 6ft) | (4) YSLT-S-9511/KI/W-E
(L-feed) | (1) YSMT-S-RPS-240
(240 watt remote 48V power supply) |
| (1) YSLT-S-9500-UL4/W2-ST1-E
(4ft long track to be field cut to 3ft) | (2) YSLT-S-9504/ST1-W
(End caps) | (1) YSMT-S-S-9000/T-US
(Cutting tool for track conductors) |
| (1) YSLT-S-9501-KL/W-E
(End feed) | | |




Sample Track Options - ST1-E



- | | |
|--|--|
| | YSLT-S-9500-UL4/B-ST1-E (Black [RAL 9010] EVO Track 4ft) |
| | YSLT-S-9500-UL8/B-ST1- (Black [RAL 9010] EVO Track 8ft) |
| | YSLT-S-9500-UL4/W-ST1-E (White [RAL 9005] EVO Track 4ft) |
| | YSLT-S-9500-UL8/W-ST1-E (White [RAL 9005] EVO Track 8ft) |


(Cont.)

Surface Mounted Track Configuration
ST3-E Profile

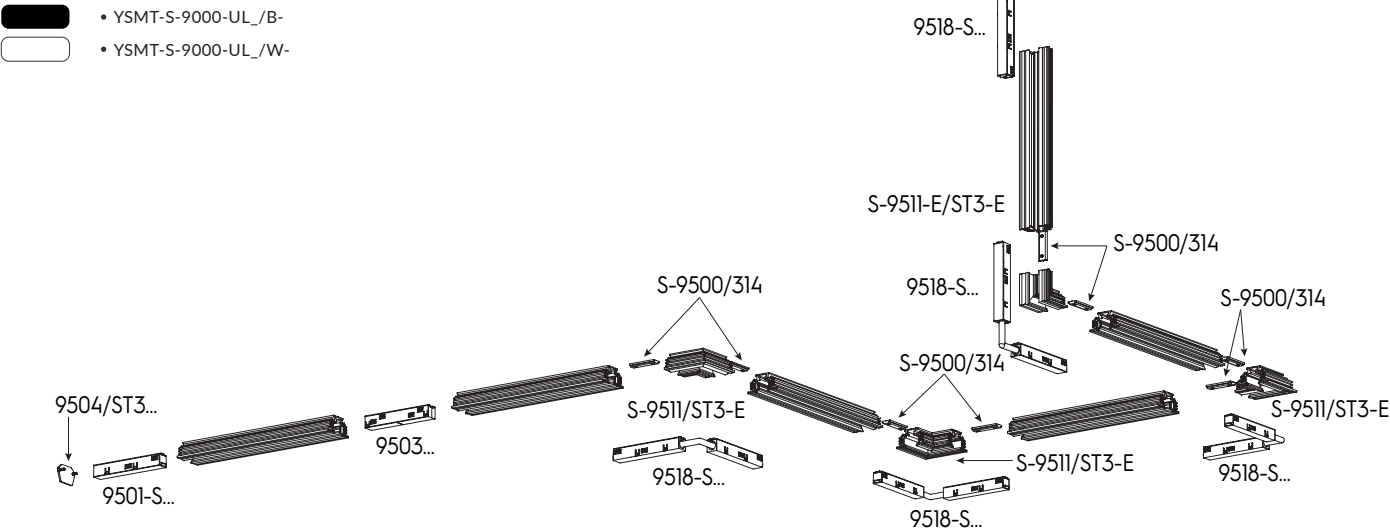

Ordering Code Example for surface mounted L configuration, White track w/ 7ftx 3ft long leg w/ a 100 watt remote 48 Volt power supply:

- | | | |
|--|---|---|
| (1) YSLT-S-9500-UL8/B-ST3-E
(8ft long track to be field cut to 6ft) | (1) YSLT-S-9503-K/B-E
(Joining connector) | (1) YSMT-S-RPS-240
(240 watt remote 48V power supply) |
| (1) YSLT-S-9500-UL4/B-ST3-E
(4ft long track to be field cut to 3ft) | (5) YSLT-S-9518-S-K/B-E
(Flexible joining connector) | (1) YSMT-S-S-9000/T-US
(Cutting tool for track conductors) |
| (1) YSLT-S-9501-SK/B-E
(End feed) | (2) YSLT-S-9504/ST3-B
(End caps) | |




Sample Track Options - ST3-E



- YSLT-S-9500-UL4/B-ST3-E (Black [RAL 9010] EVO Track 4ft)
- YSLT-S-9500-UL8/B-ST3- (Black [RAL 9010] EVO Track 8ft)
- YSLT-S-9500-UL4/W-ST3-E (White [RAL 9005] EVO Track 4ft)
- YSLT-S-9500-UL8/W-ST3-E (White [RAL 9005] EVO Track 8ft)

(Cont.)

Surface Mounted Track Configuration ST6-E Profile

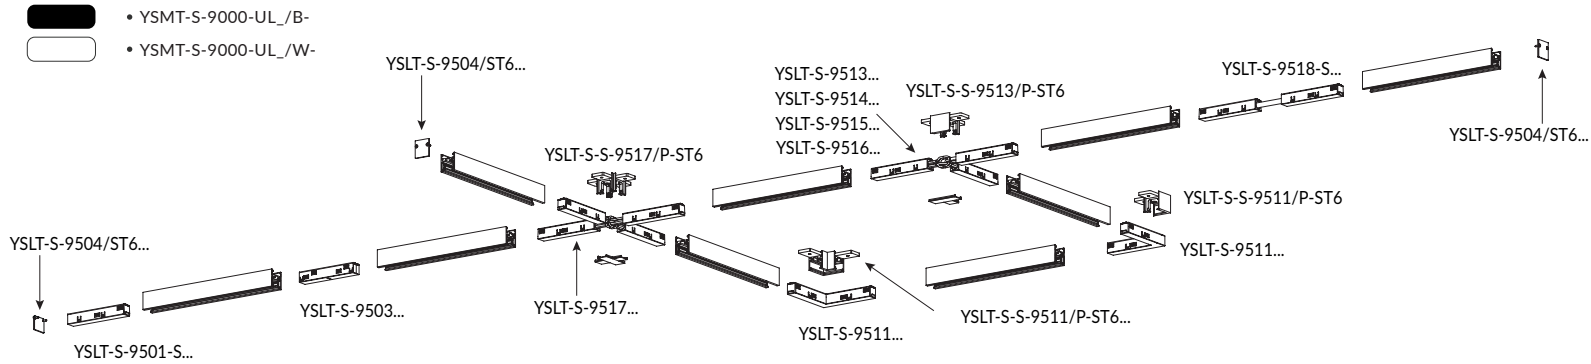

Ordering Code Example for surface mounted L configuration, White track w/ 7ftx 3ft long leg w/ a 100 watt remote 48 Volt power supply:

(1) YSLT-S-9500-UL8/B-ST6-E
(8ft long track to be field cut to 6ft)

(1) YSLT-S-9514-K/B-E
(T-feed)

(1) YSMT-S-RPS-240
(240 watt remote 48V power supply)

(1) YSLT-S-9500-UL4/B-ST6-E
(4ft long track to be field cut to 3ft)

(2) YSLT-S-S-9511/T-P-ST6
(L-feed)

(1) YSMT-S-S-9000/T-US
(Cutting tool for track conductors)


(1) YSLT-S-9501-SK/B-E
(End feed)

(1) YSLT-S-S-9517/T-P-ST6
(X-feed)

(3) YSLT-S-9504/ST6-B
(End caps)



Sample Track Options - ST6-E

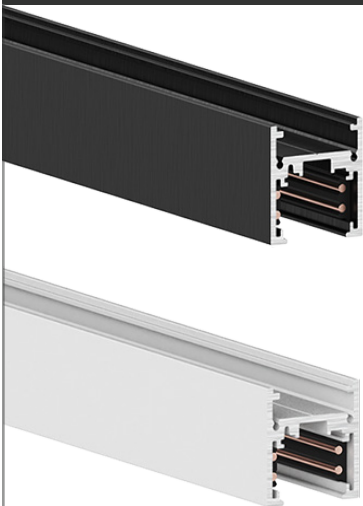


YSLT-S-9500-UL4/B-ST6-E (Black [RAL 9010] EVO Track 4ft)

YSLT-S-9500-UL8/B-ST6- (Black [RAL 9010] EVO Track 8ft)

YSLT-S-9500-UL4/W-ST6-E (White [RAL 9005] EVO Track 4ft)


YSLT-S-9500-UL8/W-ST6-E (White [RAL 9005] EVO Track 8ft)

Surface Mounted Track Configuration
ST8-E Profile

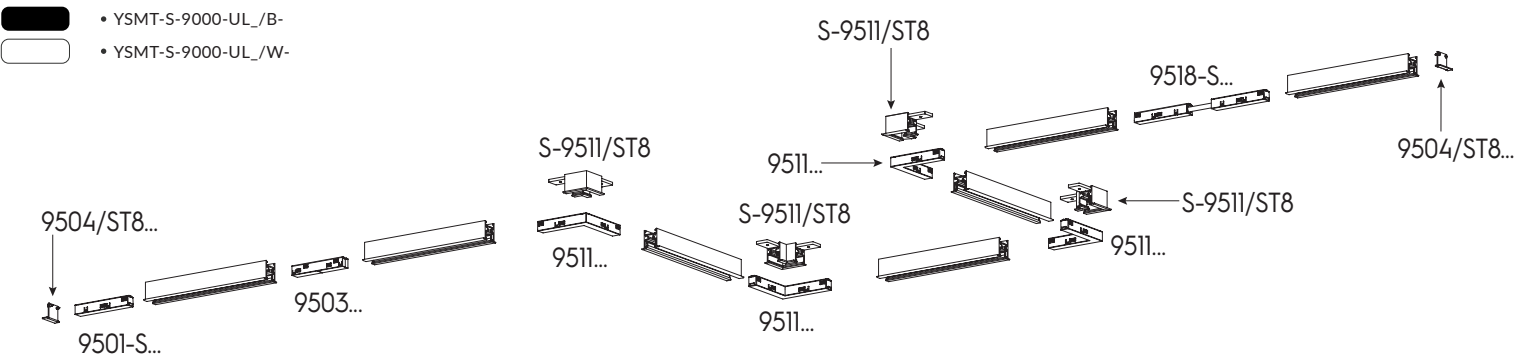


Ordering Code Example for surface mounted L configuration, White track w/ 7ftx 3ft long leg w/ a 100 watt remote 48 Volt power supply:

- | | | |
|--|---|---|
| (1) YSLT-S-9500-UL8/B-ST8-E
(8ft long track to be field cut to 6ft) | (1) YSLT-S-9518-S-K/B-E
(Flexible joining connector) | (1) YSMT-S-RPS-240
(240 watt remote 48V power supply) |
| (1) YSLT-S-9500-UL4/B-ST8-E
(4ft long track to be field cut to 3ft) | (4) YSLT-S-S-9511/T-P-ST8
(L-feed) | (1) YSMT-S-S-9000/T-US
(Cutting tool for track conductors) |
| (1) YSLT-S-9501-SK/B-E
(End feed) | (2) YSLT-S-9504/ST8-B
(End caps) | |




Sample Track Options - ST8-E

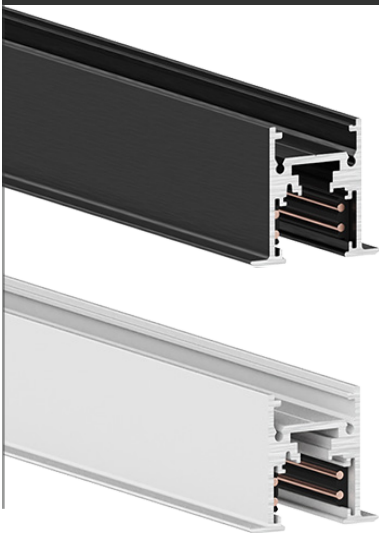

- YSLT-S-9500-UL4/B-ST8-E (Black [RAL 9010] EVO Track 4ft)
- YSLT-S-9500-UL8/B-ST8- (Black [RAL 9010] EVO Track 8ft)
- YSLT-S-9500-UL4/W-ST8-E (White [RAL 9005] EVO Track 4ft)
- YSLT-S-9500-UL8/W-ST8-E (White [RAL 9005] EVO Track 8ft)

(Cont.)

Surface Mounted Track Configuration
ST13-E Profile

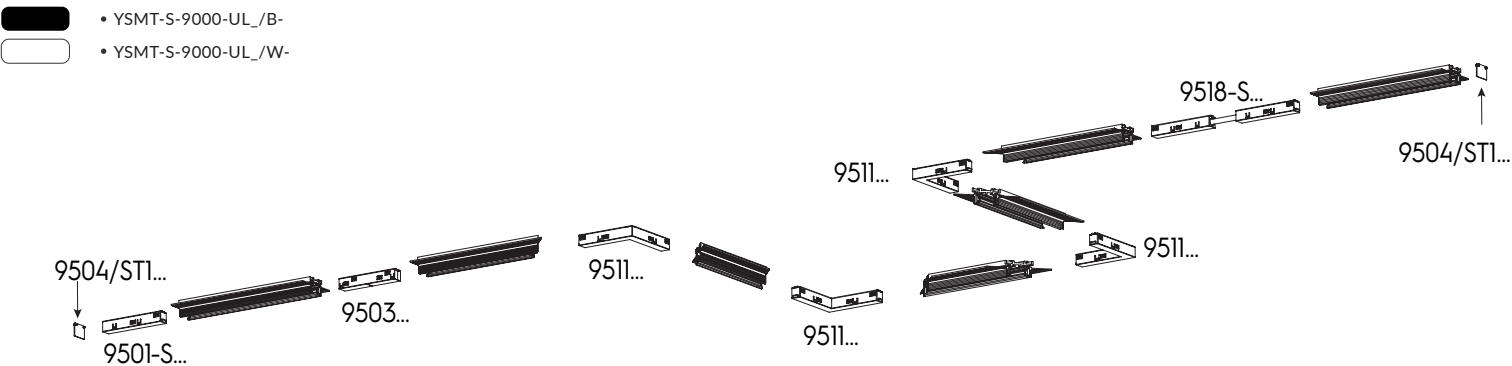

Ordering Code Example for surface mounted L configuration, White track w/ 7ftx 3ft long leg w/ a 100 watt remote 48 Volt power supply:

(1) YSLT-S-9500-UL8/B-ST13-E
(8ft long track to be field cut to 6ft)

(1) YSLT-S-9518-S-K/B-E
(Flexible joining connector)

(1) YSMT-S-RPS-240
(240 watt remote 48V power supply)


(1) YSLT-S-9500-UL4/B-ST13-E
(4ft long track to be field cut to 3ft)

(4) YSLT-S-S-9511/T-P-ST13
(L-feed)

(1) YSMT-S-S-9000/T-US
(Cutting tool for track conductors)

(1) YSLT-S-9501-SK/B-E
(End feed)

(2) YSLT-S-9504/ST13-B
(End caps)



Sample Track Options - ST13-E



YSLT-S-9500-UL4/B-ST13-E (Black [RAL 9010] EVO Track 4ft)


YSLT-S-9500-UL8/B-ST13- (Black [RAL 9010] EVO Track 8ft)

YSLT-S-9500-UL4/W-ST13-E (White [RAL 9005] EVO Track 4ft)

YSLT-S-9500-UL8/W-ST13-E (White [RAL 9005] EVO Track 8ft)

(Cont.)

Surface Mounted Track Configuration
ST15-E Profile

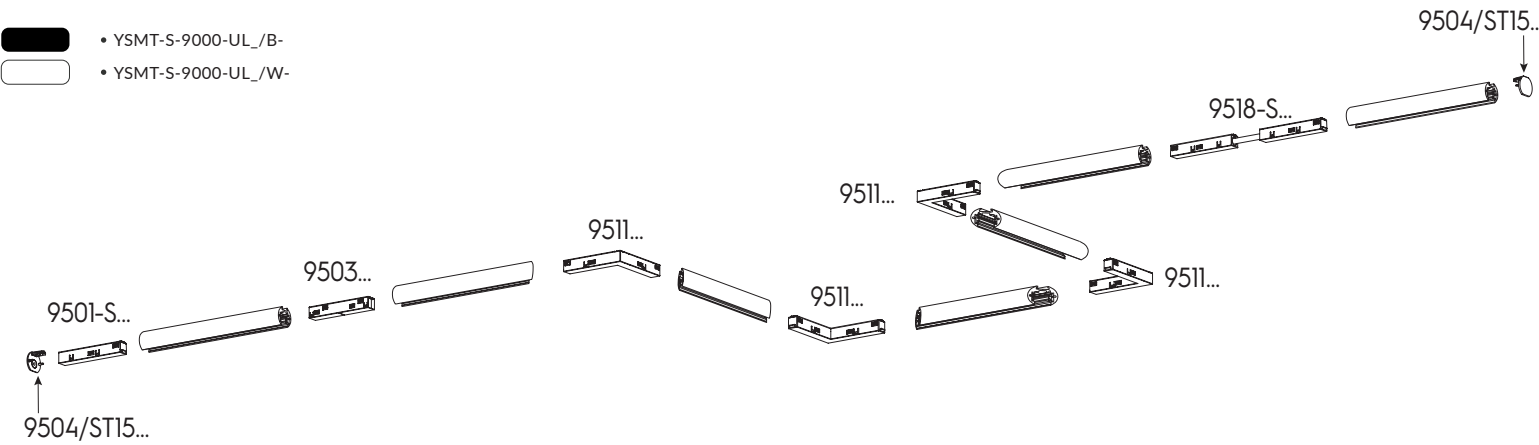

Ordering Code Example for surface mounted L configuration, White track w/ 7ftx 3ft long leg w/ a 100 watt remote 48 Volt power supply:

(1) YSLT-S-9500-UL8/B-ST15-E
(8ft long track to be field cut to 6ft)

(1) YSLT-S-9518-S-K/B-E
(Flexible joining connector)

(1) YSMT-S-RPS-240
(240 watt remote 48V power supply)


(1) YSLT-S-9500-UL4/B-ST15-E
(4ft long track to be field cut to 3ft)

(4) YSLT-S-S-9511/T-P-ST15
(L-feed)


(1) YSMT-S-S-9000/T-US
(Cutting tool for track conductors)

(1) YSLT-S-9501-SK/B-E
(End feed)

(2) YSLT-S-9504/ST15-B
(End caps)



Sample Track Options - ST15-E

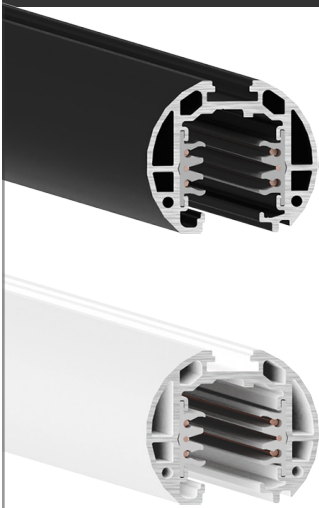

- YSLT-S-9500-UL4/B-ST15-E (Black [RAL 9010] EVO Track 4ft)
- YSLT-S-9500-UL8/B-ST15-E (Black [RAL 9010] EVO Track 8ft)

- YSLT-S-9500-UL4/W-ST15-E (White [RAL 9005] EVO Track 4ft)
- YSLT-S-9500-UL8/W-ST15-E (White [RAL 9005] EVO Track 8ft)



(Cont.)

Feed & End Caps (for all Types)

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)







Live End Feeds

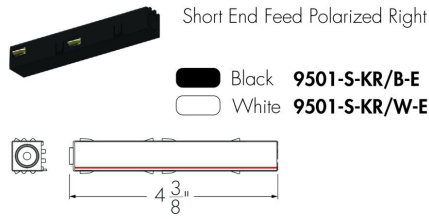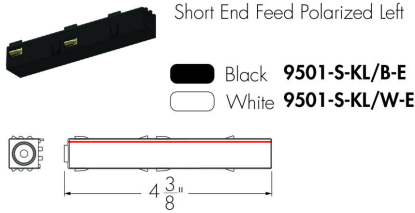

1 x 12 in knockout available.



T-Feeds

*Must be used w/ connection accessory

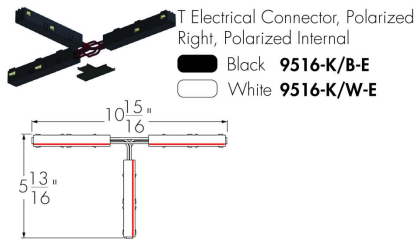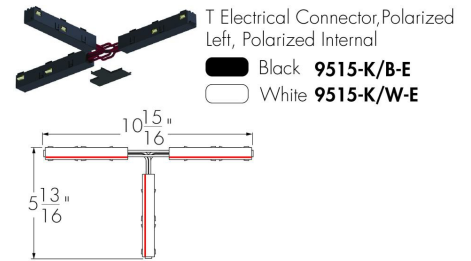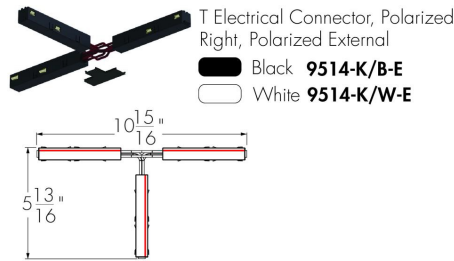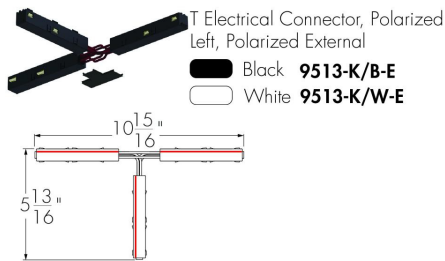


L-Feeds

*Must be used w/ connection accessory

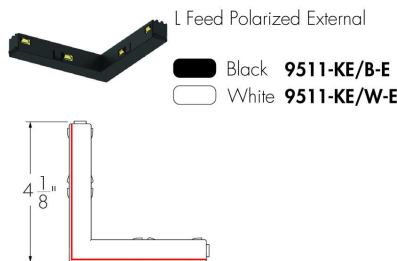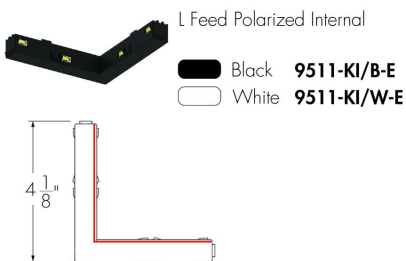


Middle Feed

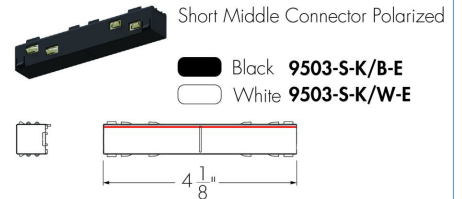


X-Feeds

*Must be used w/ connection accessory

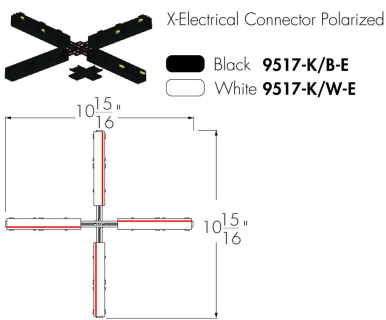


Adjustable Corner

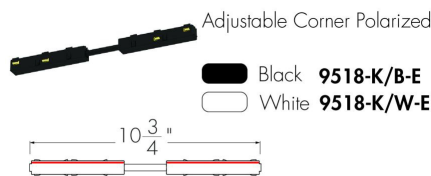

Used a connector for any angle that is not 90° or for 90° wall-to-ceiling angles.

Joining Connector

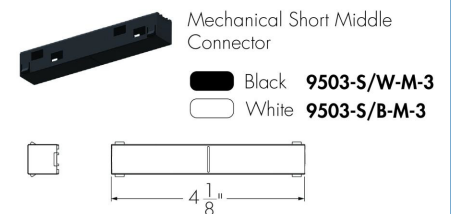

Longer brackets are required for suspension above these parts. Mechanical Connector to separate track sections electronically from each other.

(Cont.)


Feed & End Caps (Continued)

End Caps (ST1)




Metal End Cap for Track ST1 and ST13 with Locking Screws (not mounted)

Black **9504/ST1-B**
White **9504/ST1-W**




Plastic End Cap for Track ST1 and ST13 with Locking Screws (not mounted) with Central Hole for Cable

Black **9504/ST1-P-B-F**
White **9504/ST1-P-W-F**




Plastic End Cap for Track ST1 and ST13 with Locking Screws (not mounted)

Black **9504/ST1-P-B**
White **9504/ST1-P-W**



Metal End Cap for Track ST1 and ST13 with Locking Screws (not mounted) with Central Hole and Gasket for Cable

Black **9504/ST1-B-F**
White **9504/ST1-W-F**




End Cap (ST3)



End Cap for Track ST3 with Locking Screws (not mounted)

Black **9504/ST3-B**
White **9504/ST3-W**



Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)




End Caps (ST6)




Metal End Cap for Track ST6 with Locking Screws (not mounted)

Black **9504/ST6-B**
White **9504/ST6-W**




Metal End Cap for Track ST6 with Locking Screws (not mounted)

Black **9504/ST6-B-F**
White **9504/ST6-W-F**




Plastic End Cap for Track ST6 with Locking Screws (not mounted)

Black **9504/ST6-P-B**
White **9504/ST6-P-W**



Plastic End Cap for Track ST6 with Locking Screws (not mounted) with Central Hole for Cable

Black **9504/ST6-P-B-F**
White **9504/ST6-P-W-F**



Feed & End Caps (Continued)

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)




End Cap (ST8)



End Cap for Track ST8 with Locking Screws (not mounted)

- Black **9504/ST8-B**
- White **9504/ST8-W2**




End Caps (ST13)




Metal End Cap for Track ST1 and ST13 with Locking Screws (not mounted)

- Black **9504/ST1-B**
- White **9504/ST1-W**




Metal End Cap for Track ST1 and ST13 with Locking Screws (not mounted) with Central Hole and Gasket for Cable

- Black **9504/ST1-B-F**
- White **9504/ST1-W-F**




Plastic End Cap for Track ST1 and ST13 with Locking Screws (not mounted)

- Black **9504/ST1-P-B**
- White **9504/ST1-P-W-F**



Plastic End Cap for Track ST1 and ST13 with Locking Screws (not mounted) with Central Hole for Cable

- Black **9504/ST1-P-B-F**
- White **9504/ST1-P-W-F**




End Cap (ST15)



Plastic End Cap for Track ST15 with Locking Screws (not mounted) designed to be pierced

- Black **9504/ST15-P-B**
- White **9504/ST15-P-W2**



Yashar Low Voltage (48V) Surface Track


0-10 Volt or DALI Control

Plastic Covers




Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)



Plastic Covers (ST1, ST3, ST6, ST8, ST13)

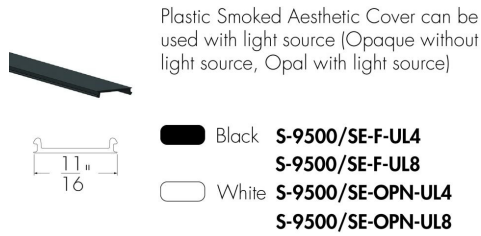



Plastic Covers (ST6)

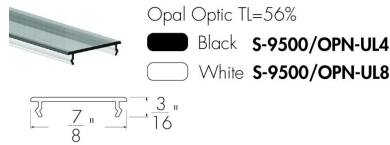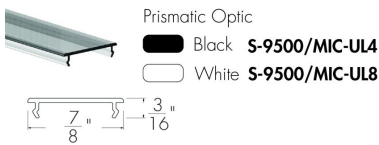



Connection Accessories

L Connection Accessory (ST3)

Reinforcing Bracket (QTY2) Must be ordered w/ L-Connection

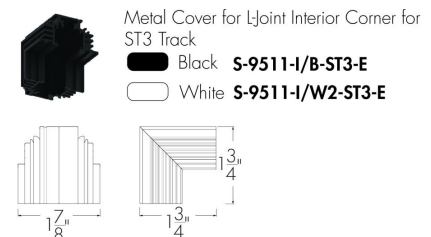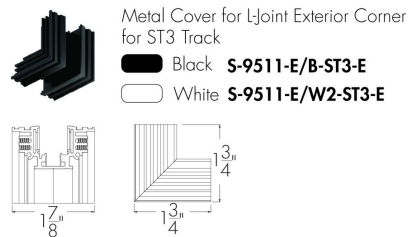

L Connection Accessory (ST6)

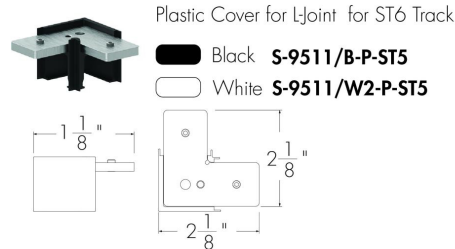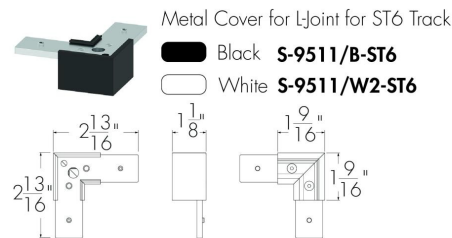

(Cont.)

Connection Accessories (Continued)

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)



T Connection - ST6




X Connection - ST6




L Connection Accessory (ST8)



J-Bracket (ST6) *For use if Track is field cut for 90° corner.*



J-Bracket

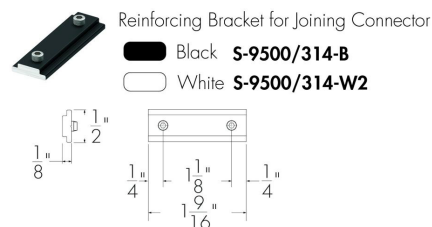


*Reinforcing Bracket (QTY2) must be ordered w/ LConnection ST3.

(Cont.)

Suspension Accessories for Non-Power Suspension Points

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)

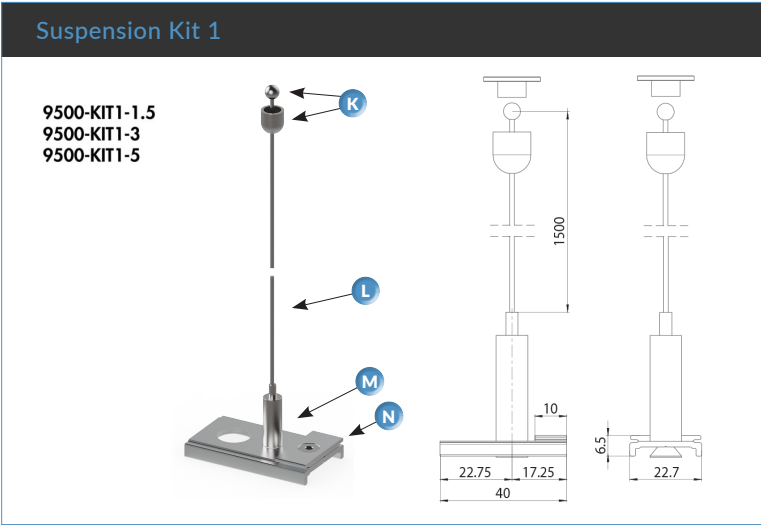

9500-KIT1-1.5
9500-KIT1-3
9500-KIT1-5

- * Dimensions available upon request.
- * All Suspension Accessories can be purchased as kits or as individual components.
- * Suspension kit not to be used in between Track connection. For Track connection suspension point, please use Suspension Kit 2.

Individual Components

Ceiling Attachment

K



Round Head Ceiling Attachment
S-9000/216

Ceiling Attachment

N



Short Pendant Bracket with Countersunk Hole for Suspensions
S-9500/313-LA

Suspension Cable

L



Steel Cable with Spherical End
Ø 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

Automatic Gripper & Screw

M



Automatic M5 Threaded Gripper with integrated balancing cylinder and side hole
S-9000/218




Screw
602/F

(Cont.)

Suspension Accessories for Non-Power Suspension Points

Suspension Kit 2

9500-KIT2-1.5
9500-KIT2-3
9500-KIT2-5

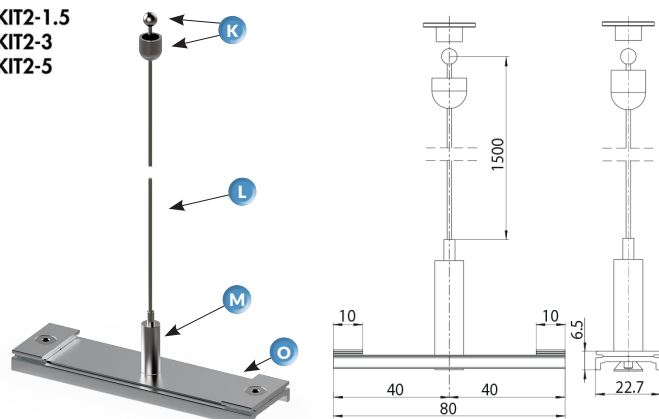

* Dimensions available upon request.

* All Suspension Accessories can be purchased as kits or as individual components.

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)



Individual Components

Ceiling Attachment

K



Round Head Ceiling Attachment
S-9000/216

Ceiling Attachment

O



Long Pendant Bracket with Countersunk
Hole for Suspension
S-9500/323-LA

Suspension Cable

L



Steel Cable with Spherical End
Ø 0.05 in

S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

Automatic Gripper & Screw

M




Automatic M5 Threaded Gripper
with integrated balancing cylinder
and side hole
S-9000/218



Screw
602/F

(Cont.)

How to Compose Mounting System fo EVO Track

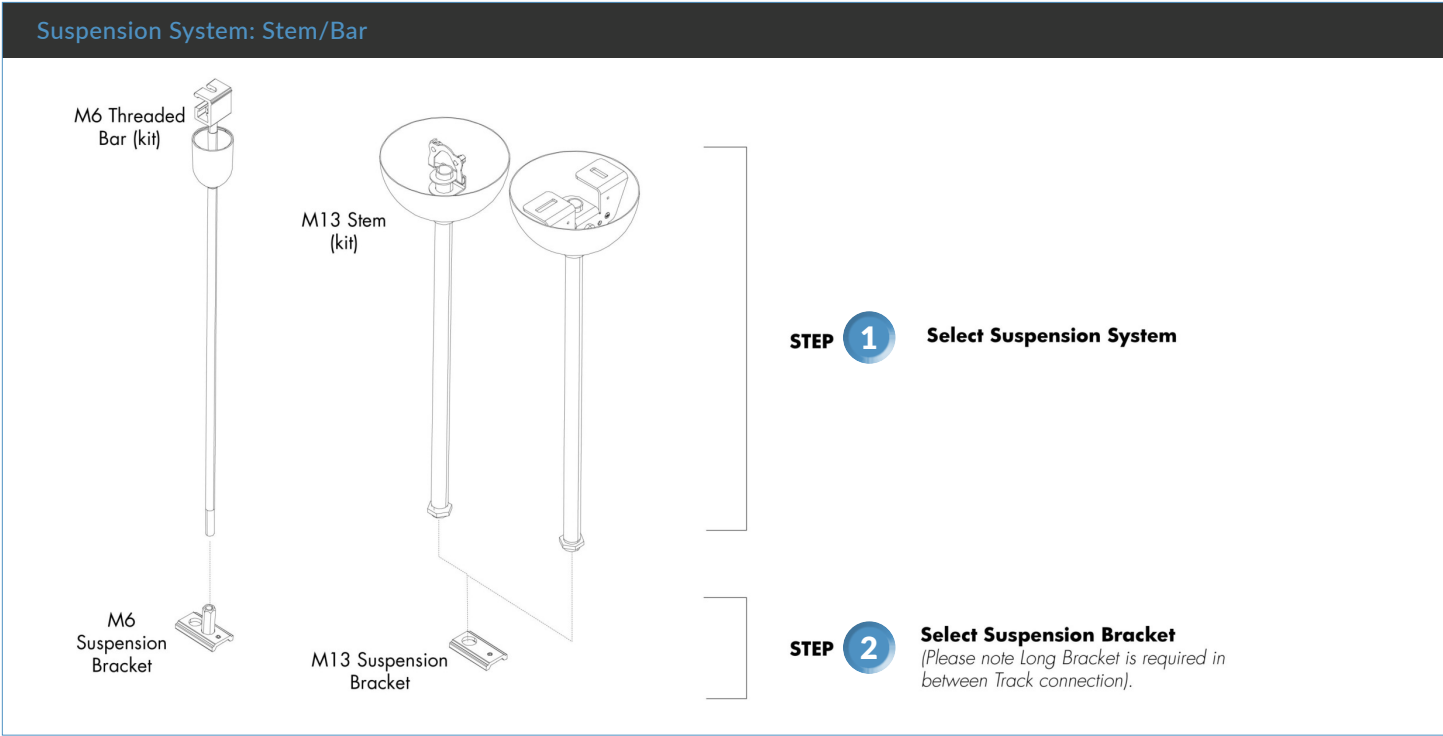

* Dimensions available upon request.
* All Suspension Accessories can be purchased as kits or as individual components.

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)



Suspension Accessories for Non-Power Suspension Points Stem/Bar Step 1

Suspension Kit P3 - Stem (ST6, ST15)

Black S-9000-P3-B
White S-9000-P3-W



Ceiling Bracket + M6 nut + Plastic Cup +M6
Threaded Bar (L 39.37in) w/ Cover Strip

Suspension Kit P3 - Stem (ST8, ST13)

S-9000-P4



Suspension Set Ceiling Bracket + M6 nut +
+M6 Threaded Bar (L 39.37in)

Suspension Kit P3 - Stem (ST6, S8)

Black S-9000-P5-B
White S-9000-P5-W2



M13 Threaded Stem (L 47.24in)
3/8" thread on each side of the stem

Suspension Kit P3 - Stem (ST6, S8)

Black S-9000-P6-S-B
White S-9000-P6-S-W2



M13 Threaded Stem (L 47.24in)
3/8" thread on each side of the stem

* Dimensions available upon request.
* All Suspension Accessories can be purchased as kits or as individual components.

Preface all ordering
codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)




* Dimensions available upon request.
* All Suspension Accessories can be purchased as kits or as individual components. (Cont.)

Suspension Accessories for Non-Power Suspension Points Stem/Bar Step 2

Short Pendant Bracket [M6 Bar] (ST13)


-  Black **S-9000/312-M6-B**
-  White **S-9000/312-M6-W2**



To be used with Steel Cable with M6 Threaded End (Suspension Kit P3 or P4).

Pendant Bracket [M6 Bar] (ST13)


-  Black **S-9000/322-M6-B**
-  White **S-9000/322-M6-W2**



To be used with Steel Cable with M6 Threaded End (Suspension Kit P3 or P4). Bracket to be used in between Track connection.

Short Pendant Bracket [M6 Bar] (ST6 & ST8)

S-9500/313-M6



To be used with Steel Cable with M6 Threaded End (Suspension Kit P3 or P4).

Pendant Bracket [M6 Bar] (ST6 & ST8)

S-9500/323-M6



To be used with Steel Cable with M6 Threaded End (Suspension Kit P3 or P4). Bracket to be used in between Track connection.

Fast Fixing Clamp M6 for Suspension (ST13)

-  Black **S-9000/119-B**
-  White **S-9000/118-W**



To be used with Bar with M6 Threaded End (Suspension Kit P3 or P4).

Clamp M6 for Suspension (ST13)

S-9000-P2/117



To be used with Steel Cable with M6 Threaded End (Suspension Kit P3 or P4).

Pendant Bracket (ST15)

-  Black **S-9500/314-M6-B**
-  White **S-9500/314-M6-W2**



To be used with Steel Cable with M6 Threaded End (Suspension Kit P3 or P4).

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)





* Dimensions available upon request.

* All Suspension Accessories can be purchased as kits or as individual components. (Cont.)

How to Compose Mounting System fo EVO Track

Suspension System: Cable

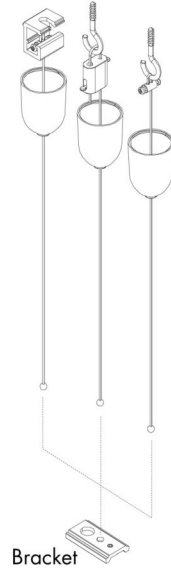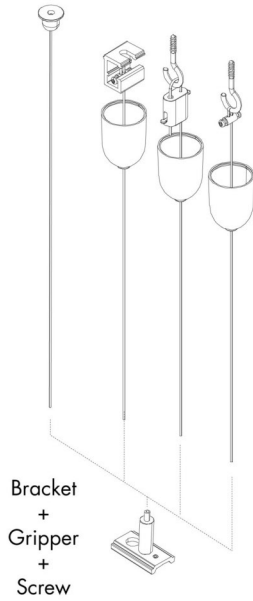

STEP 1^A Select Ceiling Bracket

STEP 1^B Select Cup (Optional)

STEP 1^C Select Cable

STEP 2 Select Suspension Bracket
(Please note Long Bracket is required in between Track connection).

Suspension Accessories for Non-Power Suspension Points: Cable

Step 1 A

Bracket Ceiling Attachment

1^A

S-9000/132

Bracket Ceiling Attachment must be used w/ Automatic Gripper for Aircraft Cable.



Gripper Ceiling Attachment

1^A

S-9000/213

Gripper Ceiling Attachment must be used w/ Automatic Gripper for Aircraft Cable.



Automatic Gripper for Aircraft Cable

1^A

S-9000/214



Automatic Gripper for Aircraft Cable

1^A


S-9000/215



Round Head Ceilig Attachment

1^A

S-9000/216



Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)



* Dimensions available upon request.

* All Suspension Accessories can be purchased as kits or as individual components. (Cont.)

Suspension Accessories for Non-Power Suspension Points: Cable

Step 1B

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)



* Dimensions available upon request.
* All Suspension Accessories can be purchased as kits or as individual components.

Round Head Ceiling Attachment1B

Plastic Cup for Steel Cable Ø0.05in

Black

White

S-9000/3-B

S-9000/3-W

Suspension Accessories for Non-Power Suspension Points: Cable

Step 1C

Suspension Cable1C

Steel Cable Ø0.05in

S-9000/211-1,5

S-9000/211-3

S-9000/211-5

59"

118"

197"

Suspension Cable w/ Spherical End1C

Steel Cable with Spherical End
Ø0.05in

S-9000/211-S-1,5

S-9000/211-S-3

S-9000/211-S-5

59"

118"

197"

Suspension Accessories for Non-Power Suspension Points: Cable

Step 2

Short Pendant Bracket (ST1)

- ☒ Black **S-9500/312-LA-B**
☐ White **S-9500/312-LA-W2**



To be used with Gripper **S-9000/218**, Screw **Vite-902/F** and Steel Cable **S-9000/211**...

Pendant Bracket (ST1)

- ☒ Black **S-9500/322-LA-B**
☐ White **S-9500/322-LA-W2**



To be used with Gripper **S-9000/218**, Screw **Vite-902/F** and Steel Cable **S-9000/211**...Bracket to be used in between Track connection.

Short Pendant Bracket (ST1)

- ☒ Black **S-9500/312-SV-B**
☐ White **S-9500/312-SV-W2**



To be used with Steel Cable with a Spherical End **S-9000/211-S**...

Pendant Bracket (ST1)

- ☒ Black **S-9500/322-SV-B**
☐ White **S-9500/322-SV-W2**



To be used with Steel Cable with a Spherical End **S-9000/211-S**... Bracket to be used in between Track connection.

Fast Fixing Clamp w/ Gripper (ST6 & ST8)

- ☒ Black **S-9500/114-T-B**
☐ White **S-9500/114-T-W2**



To be used with Steel Cable **S-9000/211**...

Fast Fixing Clamp (ST6)

- S-9500/115**
☒ Black **S-9500/115-B**
☐ White **S-9500/115-W2**



To be used with Steel Cable with a Spherical End **S-9000/211-S**...

Short Pendant Bracket (ST6 & ST8)

S-9500/313-LA




To be used with Gripper **S-9000/218**, Screw **Vite-902/F** and Steel Cable **S-9000/211**...

S-9500/313-SV




To be used with Steel Cable with a Spherical End **S-9000/211-S**...

S-9500/323-LA



To be used with Gripper **S-9000/218**, Screw **Vite-902/F** and Steel Cable **S-9000/211**...Bracket to be used in between Track connection.

S-9500/323-SV



To be used with Steel Cable with a Spherical End **S-9000/211-S**... Bracket to be used in between Track connection.

Preface all ordering codes w/ YSLT-S-
EX:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)



* Dimensions available upon request.

* All Suspension Accessories can be purchased as kits or as individual components. (Cont.)


Suspension Accessories for Non-Power Suspension Points: Cable

Step 2

(Continued)

Short Pendant Bracket M6 Bar (ST16 & ST8)

S-9500/313-SV



To be used with Steel Cable with a Spherical End **S-9000/211-S...**

Pendant Bracket (ST15)

Black **S-9500/314-LA-B**
White **S-9500/314-LA-W2**



To be used with Gripper **S-9000/218**, Screw **Vite-902/F** and Steel Cable **S-9000/211-...**



Joining Connector Between Track Connection

Reinforcement Bracket for Joining Connectors (ST3 & ST15)

Black **S-9500/314-LA-B**



ST3 : 1 x Bracket per Joining Tracks
ST5 : 3 x Brackets per Joining Tracks
ST7 : 1 x Bracket per Joining Tracks
ST9 : 1 x Bracket per Joining Tracks
ST14 : 3 x Brackets per Joining Tracks
ST15 : 1 x Bracket per Joining Tracks



Short Pendant Bracket (ST1) / Reinforcement Bracket for Joining Connector (ST1)

Black **S-9500/322-SV-B**
White **S-9500/322-SV-W2**




To be used with Steel Cable with a Spherical End **S-9000/211-S...**

Black **S-9500/322-LA-B**
White **S-9500/322-LA-W2**



To be used with Gripper **S-9000/218** and Screw **Vite-902/F**



ST1 : 1 x Bracket per Joining Tracks. Select bracket according to mounting type selection.

Pendant Bracket (ST1) / Reinforcement Bracket for Joining Connector (ST1, ST6, & ST8)

S-9500/323-LA



To be used with Gripper **S-9000/218**, Screw **Vite-902/F** and Steel Cable **S-9000/211-...**

S-9500/323-SV



To be used with Steel Cable with a Spherical End **S-9000/211-S...**

S-9500/323-M6




To be used with M6 Threaded Bar.

S-9500/323-M13



To be used with Stem M13.

ST2 : 1 x Bracket per Joining Tracks
ST6 : 1 x Bracket per Joining Tracks
ST8 : 1 x Bracket per Joining Tracks
Select bracket according to mounting type selection.



Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)

* Dimensions available upon request.

* All Suspension Accessories can be purchased as kits or as individual components. (Cont.)

Yashar Low Voltage (48V) Surface Track

0-10 Volt or DALI Control

Joining Connector Between Track Connection


Pendant Bracket (ST1) / Reinforcement Bracket for Joining Connector (ST13)

Black **S-9500/322-LA-B**
White **S-9500/322-LA-W2**



To be used with Gripper **S-9000/218**,
Screw **Vite-902/F** and Steel Cable
S-9000/211.

ST13: 1 x Bracket per Joining Tracks



Recessed Mounting Accessories

Recessed Clamp (ST8)

S-9500/111
Black **S-9500/111-B**



Bracket for Trimless Track (ST3)

S-9500/315
Length 3 in



Template/Trimless Installation Tool (ST13)

S-9500/D1-ST13



To be used during Trimless installation to facilitate fixation of Track.

Template/Trimless Installation Tool (ST5)

S-9500/D1-ST5



To be used during Trimless installation to facilitate fixation of Track.

Surface Mounting Accessories

Template/Trimless Installation Tool (ST13)

Black **S-9500/114-B**
White **S-9500/114-W2**



To be used for Surface installation.

Preface all ordering
codes w/ YSLT-S-
EX:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)



* Dimensions available upon request.

* All Suspension Accessories can be purchased as kits or as individual components. (Cont.)

How to Order

Pendant Bracket (ST1) / Reinforcement Bracket for Joining Connector (ST13)				
SLI	Track	Length/Radius	Finish	Configuration & Mounting
YSLT-S	9500 MULTISYSTEM® EVO	• UL4 [4 ft] • UL8 [8 ft]	• /W2 [White] • /B [Black]	• ST3-E [Painted Trimless EVO Track (Recessed)] • ST6-E [Painted Embossed EVO Track (Surface, Suspended)] • ST8-E [Painted Recessed Embossed EVO Track (Recessed)] • ST13-E [Painted Trimless EVO Track (Recessed)] • ST15-E [Painted Embossed Round EVO Track (Surface, Suspended)]

* Dimensions available upon request.
* All Suspension Accessories can be purchased as kits or as individual components. (End)

Preface all ordering codes w/ YSLT-S-
ex:
YSLT-S-9501/W3C
YSLT-S-9511/B3C
(See page 2)

