
The Yashar Family


The Yashar Mains track system is highlighted by A.A.G Stucchi's ONETRACK™ system. The ONETRACK™ is made of extruded aluminum with PVC insulating extrusion and copper conductors. The YASHAR family offers both non-dimmable and Phase, 0-10v or DALI dimmable projector luminaires. Available in 4ft, 8ft, and 12ft length as standard. Finishes include white and black. A wide range of connectors, mounting options, and accessories make this system suitable for a numerous application.

In addition to the mains version, Yashar Low Voltage [48V] offers a 48 volt track with compatible track heads.


Surface Mount Track System

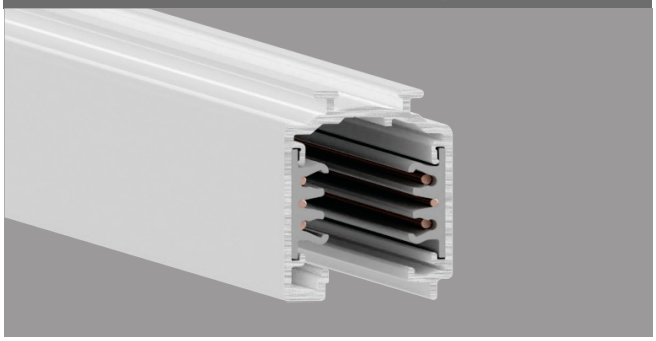


ST - CONFIGURATION



R - CONFIGURATION



Recessed Track System

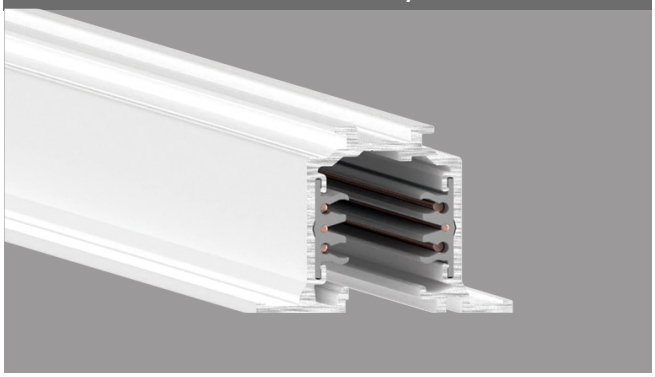

PROJECT: _____ TYPE: _____

SPECIFIER: _____ DATE: _____

Key Points (YSMT-S)

Housing

- Extruded aluminum single circuit track. Track is available in standard lengths of 4 foot (1200cm), 8 foot (2400cm) and 12 foot (3700cm) and cuttable in the field for custom lengths.

- Track system components include end caps, end and joiner feeds, straight joiners, corner joiners, T-joiners and X-joiners.

- Available in black or white painted finishes


Electrical And Dimming Configurations

- The Yashar mains-voltage track lighting system that combines three independently selectable lighting circuits with an integrated two-conductor data bus. It supports dimming protocols such as 0-10v or ELV for a single zone of dimming while DALI allows for individual control, with the exact capabilities depending on the track, adapter and control equipment selected. Compatible luminaires can be assigned to each circuit allowing separate switching with a shared neutral.
  Lighting Circuits: 3-switched phases: L1, L2, L3
  Neutral: 1 conductor (N)D ata bus: 2 additional conductors, D+ and D-

- Current limiters available in range between 0.5 Amps and 12 Amps.

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Surface Mount Track Configuration

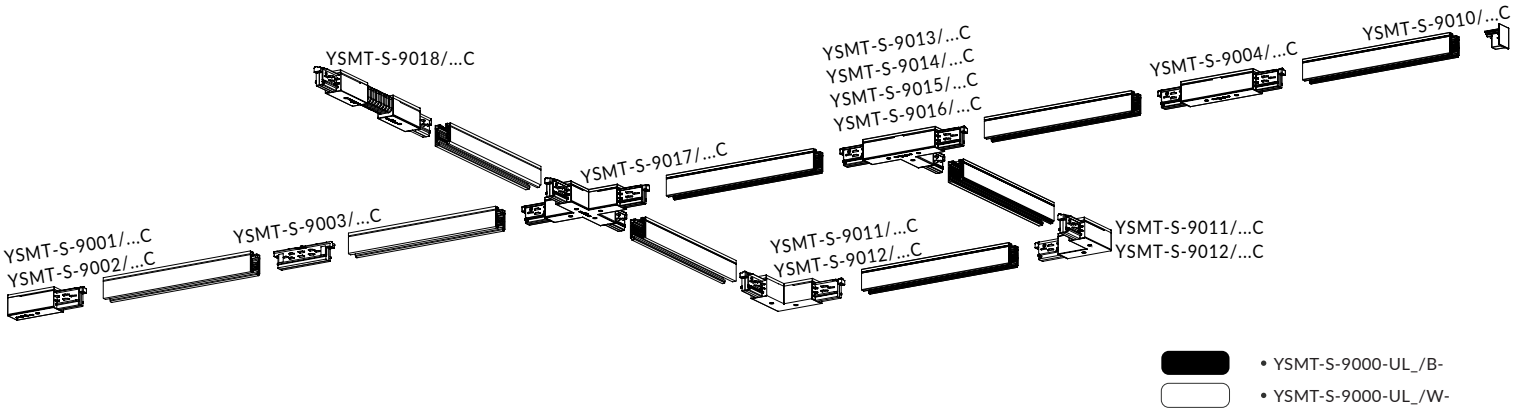

Ordering Code Example for a 120 Volt, L configuration, White track with 11ftx3ft long legs & 3 amp current limiters on each circuit:

(1) YSMT-S-9000-UL12/W-ST2-120
(12ft long track to be field cut)

(1) YSMT-S-9000-UL4/W-ST2-120
(4ft long track to be field cut)


(1) YSMT-S-9012/W-2C
(Corner connector)

(1) YSMT-S-9004-CL-S/W
(End cap for non-feed end)


(1) YSMT-S-9001-CL/W-2C
(End feed/current limiter housing)

(1) YSMT-S-CL3
(3 amp current limiter)

(1) YSMT-S-S-9000/T-US
(Cutting tool for track conductors)



Surface Track Options

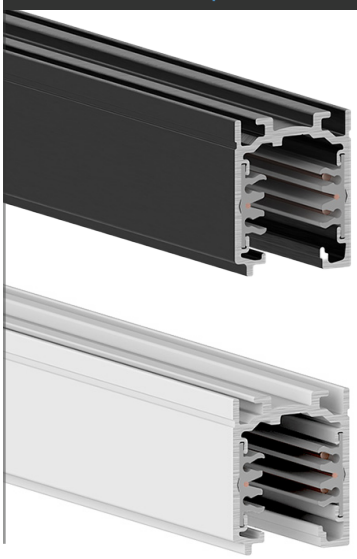


- YSMT-S-9000-UL4/B- (*Black Track 120V [RAL 901] 4 Feet*)
- YSMT-S-9000-UL8/B- (*Black Track 120V [RAL 9010] 8 Feet*)
- YSMT-S-9000-UL12/B- (*Black Track 120V [RAL 9010] 12 Feet*)
- YSMT-S-9000-UL4/W- (*White Track 120V [RAL 9005] 4 Feet*)
- YSMT-S-9000-UL8/W- (*White Track 120V [RAL 9005] 8 Feet*)
- YSMT-S-9000-UL12/W- (*White Track 120V [RAL 9005] 12 Feet*)

**Consult factory for Anodized Gray finish.*

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Recessed Track Configuration

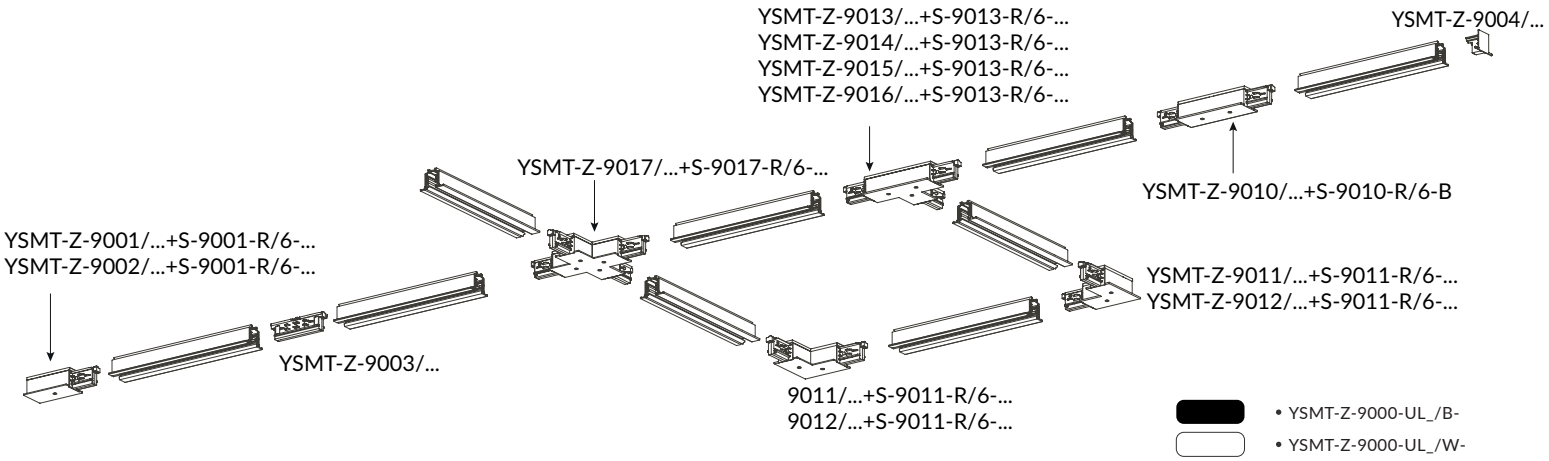

Ordering Code Example for a 120 Volt, L configuration, White track with 11ftx3ft long legs & 3 amp current limiters on each circuit:

(1) YSMT-Z-9000-UL12/W-ST2-120
(12ft long track to be field cut)

(1) YSMT-Z-9000-UL4/W-ST2-120
(4ft long track to be field cut)


(1) YSMT-Z-9013/W-2C
(Corner connector)

(1) YSMT-Z-9004-CL-S/W
(End cap for non-feed end)


(1) YSMT-S-9001-CL/W-2C
(End feed/current limiter housing)

(1) YSMT-Z-CL3
(3 amp current limiter)

(1) YSMT-S-S-9000/T-US
(Cutting tool for track conductors)



Recessed Track Options

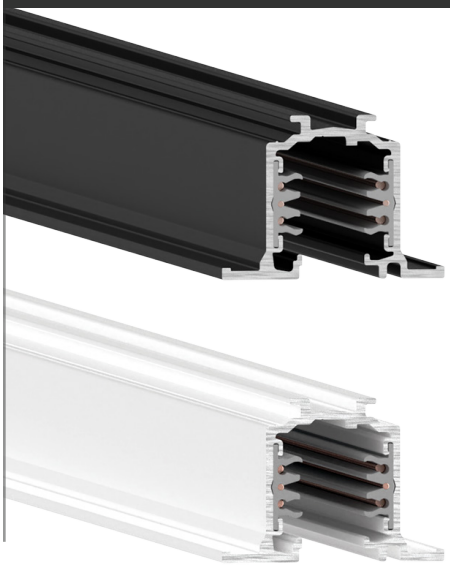

- YSMT-Z-9000-UL4/B-R (*Black Track 120V [RAL 901] 4 Feet*)
- YSMT-Z-9000-UL8/B-R (*Black Track 120V [RAL 9010] 8 Feet*)
- YSMT-Z-9000-UL12/B-R (*Black Track 120V [RAL 9010] 12 Feet*)
- YSMT-Z-9000-UL4/W-R (*White Track 120V [RAL 9005] 4 Feet*)
- YSMT-Z-9000-UL8/W-R (*White Track 120V [RAL 9005] 8 Feet*)
- YSMT-Z-9000-UL12/W-R (*White Track 120V [RAL 9005] 12 Feet*)

**Consult factory for Anodized Gray finish.*

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Feed & End Caps (for Type ST & Type R)


Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

Live End Feeds

2 x 7/8in Knockout available.




L-End Feed Polarity Right
- Black **9001/B-3C**
- White **9001/W-3C**



2 x 7/8in Knockout available.




R-End Feed Polarity Right
- Black **9002/B-3C**
- White **9002/W-3C**




T-Feeds


1 x 7/8in Knockout available.




T-End Polarity External Left Earthing Internal Right
- Black **9013/B-3C**
- White **9013/W-3C**




1 x 7/8in Knockout available.




T-End Polarity External Right Earthing Internal Left
- Black **9014/B-3C**
- White **9014/W-3C**




1 x 7/8in Knockout available.




T-End Polarity External Left Earthing Internal Right
- Black **9015/B-3C**
- White **9015/W-3C**



1 x 7/8in Knockout available.



T-Feed Polarity Internal Right/Earthing External Left
- Black **9016/B -3C**
- White **9016/W -3C**




L-Feeds

1 x 7/8in Knockout available.




L-End Feed Polarity Internal Earthing External
- Black **9012/B-3C**
- White **9012/W-3C**



1 x 7/8in Knockout available.




L-End Feed Polarity Internal Earthing External
- Black **9011/B-3C**
- White **9011/W-3C**




X-Feeds

x 7/8in Knockout available.



X-Feed
- Black **9017/B -3C**
- White **9017/W -3C**




Middle Feed

1 x 7/8in Knockout available.




Middle Feed
- Black **9010/B-3C**
- White **9010/W-3C**



Joining Connector



Joining Connector
- Black **9003/B**
- White **9003/W**



Longer brackets are required for suspension above these parts.

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Yashar Mains Surface Track

Track Three circuit / one neutral (20A) – 120 Volt, Polarized


specialty lighting industries

Adjustable Corner



Adjustable Corner

- Black **9018/B -3C**
- White **9018/W -3C**




End Cap (Type ST)



End Cap for Track with Locking Screw

- Black **9004/B**
- White **9004/W**




End Cap (Type R)



End Cap for Recessed Track with Locking Screw

- Black **9004-R/B**
- White **9004-R/W**




Plastic Feed Covers for Recessed Track (for Type R)

Live End Feed Cover



Recessed Cover for End Feed

- Black **S-9001-R/6-B**
- White **S-9001-R/6-W**




Middle Feed Cover




Recessed Cover for Middle Feed

- Black **S-9010-R/6-B**
- White **S-9010-R/6-W**




L Feed Cover



Recessed Cover for L-Feed

- Black **S-9011-R/6-B**
- White **S-9011-R/6-W**




T Feed Cover




Recessed Cover for T-Feed

- Black **S-9013-R/6-B**
- White **S-9013-R/6-W**




X Feed Cover



Recessed Cover for X-Feed

- Black **S-9017-R/6-B**
- White **S-9017-R/6-W**




Plastic Feed Covers (for Type ST & Type R)



Additional Cover Strip for Track 8 Ft


- Black **S-9000/GP-B-UL8**
- White **S-9000/GP-W-UL8**





Additional Cover Strip for Track 4 Ft

- Black **S-9000/GP-B-UL4**
- White **S-9000/GP-W-UL4**




Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice
Rev 1A - July 2026


Feed for Installation of Current Limiters (for Type ST and Type R)



L- End Feed with Circuit Breaker for 3c*

Black **9001-CL/B-3C**

White **9001-CL/W-3C**



R- End Feed with Circuit Breaker for 3c*

Black **9002-CL/B-3C**

White **9002-CL/W-3C**

Preface all ordering codes with with YSMT-S- ex: YSMT-S-9012/W3C YSMT-S-9015/B3C *(See page 2)*

** In this enclosure the client must specify and install 3 individual single pole circuit protectors (resistor / current limiter) as required for the project. Frequency and Delay setting: 2 (Slow DC 50/60Hz) [by others]. Circuit protectors are to be sourced and supplied by others. Contact the factory for assistance or any questions you may have.*

Reinforcing Brackets (RB)

Required when a rigid 3/8" stem is used for both mechanical suspension and electrical feed. In this case no additional mounting point (aircraft cable) is installed.

RB for Live End Feeds




Reinforcing Bracket for End Feed

Black **S-9001/SU-B**

White **S-9001/SU-W**


RB for Middle-Feed



Reinforcing Bracket for Middle Feed

Black **S-9010/SU-B**

White **S-9010/SU-W**




RB for L Feed



Reinforcing Bracket for L-Feed

Black **S-9011/SU-B**

White **S-9011/SU-W**




RB for X Feed



Reinforcing Bracket for X-Feed

Black **S-9017/SU-B**

S-9017/SU-W

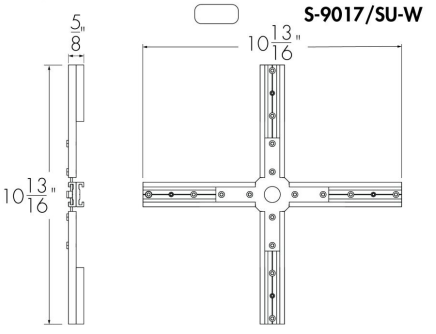


RB for T Feed



Reinforcing Bracket for T-Feed

Black **S-9013/SU-B**

White **S-9013/SU-W**



.

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Suspension Accessories for Power Suspension Points (Type ST)

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

Suspension Kit P3 - Power Side

Black
S-9000-P3-P-B-UL-36
S-9000-P3-P-B-UL-120
S-9000-P3-P-B-UL-200

White
S-9000-P3-P-W-UL-36
S-9000-P3-P-W-UL-120
S-9000-P3-P-W-UL-200



** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Suspension Accessories for Non-Power Suspension Points (Type ST)

Suspension Kit P3 - Non-Power Side

Black
S-9000-P3-S-B-UL-36
S-9000-P3-S-B-UL-120
S-9000-P3-S-B-UL-200

White
S-9000-P3-S-W-UL-36
S-9000-P3-S-W-UL-120
S-9000-P3-S-W-UL-200



2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice
Rev 1A - July 2026


Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Suspension Kit 4

9000-KIT4-1.5
9000-KIT4-3
9000-KIT4-5

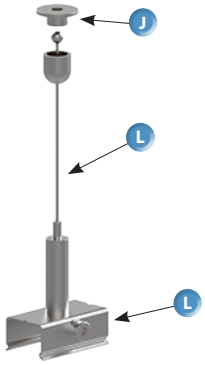

Individual Components

Ceiling Attachment (J)



Round Head Ceiling Attachment
S-9000/216

Suspension Cable (K)



Steel Cable with Spherical End
∅ 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

Clamp and Gripper (L)



Clamp with Automatic Gripper
S-9000/116

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Rev 1A - July 2026

Suspension Accessories for Non-Power Suspension Points (Type ST)


Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Suspension Kit 5

Black
9000-KIT5-1.5-B
9000-KIT5-3-B
9000-KIT5-5-B

White
9000-KIT5-1.5-W
9000-KIT5-3-W
9000-KIT5-5-W

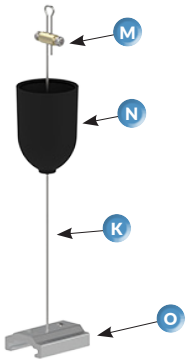

Individual Components

Ceiling Attachment (M)



Screw Gripper
S-9000/215

Plastic Cup (N)



Plastic Cup for Steel Cable
Ø0.05 in
Black **S-9000/3-B**
White **S-9000/3-W**

Suspension Cable (K)



Steel Cable with Spherical End
Ø 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

Pendant Bracket (O)



Short Pendant Bracket for Suspensions (use with Steel Cable with Spherical End)
Black **S-9000/312-SV-B**
White **S-9000/312-SV-W**

If mounting kit is used above the Joining Connector (9003/B or 9003/VV), please note that the ***Short Pendant Bracket (S-9000/312-SV) must be replaced with a Long Pendant Bracket (S-9000/322-SV)*** *which is not included in Suspension Kit.*



Long Pendant Bracket for Suspensions to be used when Tracks are connected with a 9003 Joint (use with Steel Cable with Spherical End).
Black **S-9000/322-SV-B**
White **S-9000/322-SV-W**

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Suspension Accessories for Non-Power Suspension Points (Type ST)


Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Suspension Kit 6

Black
9000-KIT6-1.5-B
9000-KIT6-3-B
9000-KIT6-5-B

White
9000-KIT6-1.5-W
9000-KIT6-3-W
9000-KIT6-5-W



Individual Components

Ceiling Attachment (M)



Screw Gripper
S-9000/215

Plastic Cup (N)



Plastic Cup for Steel Cable Ø0.05 in
Black **S-9000/3-B**
White **S-9000/3-W**

Suspension Cable (P)



Steel Cable Ø0.05 in
S-9000/211-1,5 59in
S-9000/211-3 118in
S-9000/211-5 197in

Automatic Gripper & Screw (Q)



Automatic M5 Threaded Gripper with integrated balancing cylinder and side hole
S-9000/218



Screw
602/F

Bracket with Countersunk Hole (R)



Short Pendant Bracket with Countersunk Hole for Suspensions
Black **S-9000/312-LA-B**
White **S-9000/312-LA-W**

If mounting kit is used above the Joining Connector (9003/B or 9003/W), please note that the ***Short Pendant Bracket (S-9000/312-LA) must be replaced with a Long Pendant Bracket (S-9000/322-LA)*** *which is not included in Suspension Kit.*



Long Pendant Bracket with Countersunk Hole for Suspensions to be used when Tracks are Connected with a 9003 Joint.
Black **S-9000/322-LA-B**
White **S-9000/322-LA-W**

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Rev 1A - July 2026

Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)


** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Suspension Kit 8

9000-KIT8-1.5
9000-KIT8-3
9000-KIT8-5

Black
9000-KIT8-1.5-B
9000-KIT8-3-B
9000-KIT8-5-B

White
9000-KIT8-1.5-W
9000-KIT8-3-W
9000-KIT8-5-W



Individual Components

Ceiling Attachment (J)



Round Head Ceiling Attachment
S-9000/216

Suspension Cable (K)



Steel Cable with Spherical End
Ø 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

Automatic Gripper & Screw (Q)

Automatic M5 Threaded Gripper with integrated balancing cylinder and side hole
S-9000/218



Screw
602/F

Bracket with Countersunk Hole (R)



Short Pendant Bracket with Countersunk Hole for Suspensions
Black **S-9000/312-LA-B**
White **S-9000/312-LA-W**

If mounting kit is used above the Joining Connector (9003/B or 9003/W), please note that the ***Short Pendant Bracket (S-9000/312-LA) must be replaced with a Long Pendant Bracket (S-9000/322-LA)*** *which is not included in Suspension Kit.*



Long Pendant Bracket with Countersunk Hole for Suspensions to be used when Tracks are Connected with a 9003 Joint.
Black **S-9000/322-LA-B**
White **S-9000/322-LA-W**


2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

Suspension Kit 1

9000-KIT1-1.5
9000-KIT1-3
9000-KIT1-5



** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Individual Components

Ceiling Attachment (J)



Screw Gripper
S-9000/215

Suspension Cable (P)



Steel Cable Ø0.05 in
S-9000/211-1,5 59in
S-9000/211-3 118in
S-9000/211-5 197in

Clamp and Gripper (L)



Clamp with Automatic Gripper
S-9000/116

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Suspension Accessories for Non-Power Suspension Points (Type ST)


Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Suspension Kit 2

Black
9000-KIT2-1.5-B
9000-KIT2-3-B
9000-KIT2-5-B

White
9000-KIT2-1.5-W
9000-KIT2-3-W
9000-KIT2-5-W



Individual Components

Ceiling Attachment (M)



Screw Gripper
S-9000/215

Ceiling Bracket (S)



Ceiling Brackets for Suspensions
S-9000/132

Plastic Cup (N)



Plastic Cup for Steel Cable
Ø0.05 in
Black **S-9000/3-B**
White **S-9000/3-W**

Suspension Cable (K)



Steel Cable with Spherical End
Ø 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

T-Fixing Clamp (T)



Painted Track Fast Fixing Clamp
Black **S-9000/115-B**
White **S-9000/115-W**

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice
Rev 1A - July 2026

Suspension Accessories for Non-Power Suspension Points (Type ST)


Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Suspension Kit 3

Black
9000-KIT3-1.5-B
9000-KIT3-3-B
9000-KIT3-5-B

White
9000-KIT3-1.5-W
9000-KIT3-3-W
9000-KIT3-5-W



Individual Components

Ceiling Attachment (M)



Screw Gripper
S-9000/215

Suspension Cable (K)



Steel Cable with Spherical End
Ø 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

Plastic Cup (N)



Plastic Cup for Steel Cable
Ø0.05 in
Black **S-9000/3-B**
White **S-9000/3-W**

Clamp and Gripper (L)



Clamp with Automatic Gripper
S-9000/116

Suspension Kit P1 Stem

Black
S-9000-P1-B-UL

White
S-9000-P1-W-UL



Stem to be ordered separately

Black **9000-SF/12-B**
9000-SF/18-B
9000-SF/24-B
9000-SF/36-B
9000-SF/48-B

White **9000-SF/12-W**
9000-SF/18-W
9000-SF/24-W
9000-SF/36-W
9000-SF/48-W

3/8 in thread on each end of the Stem.

Suspension Kit P2 Stem

Black
S-9000-P2-B-UL

White
S-9000-P2-W-UL



Stem to be ordered separately

Black **9000-SF/12-B**
9000-SF/18-B
9000-SF/24-B
9000-SF/36-B
9000-SF/48-B

White **9000-SF/12-W**
9000-SF/18-W
9000-SF/24-W
9000-SF/36-W
9000-SF/48-W

3/8 in thread on each end of the Stem.

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice
Rev 1A - July 2026

Additional Mounting Accessories

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

** Dimensions available upon request.*
** All Suspension Accessories can be purchased as kits or as individual components.*

Fixing Clamp for Suspension

Black
S-9000/114-T-B

White
S-9000/114-T-W



Stem Bracket

S-9000/112-BT



Optional Bracket to secure stem to track if not using hardware already provided with Stem Kit P1 or P2.

Suspension Bracket with Automatic Gripper

S-9000/231



Ceiling Clamp for Surface Mount

S-9000/111



Optional clamp to be used for aprox. 9mm space-off between track and surface.

Automatic Gripper for Aircraft Cable

S-9000/214



Fixing Clamp for 15/16 in T-bar

Black
S-9000/119-TB-B

White
S-9000/119-TB-W



If Fixing clamp for 9/16" T-bar is required, please consult factory.

R-Brace

S-9000/131

Black
S-9000/131-B

White
S-9000/131-W



Optional clamp to be used for approximately 9.50mm space-off between track and surface.
Optional clamp to be used with 1/4-20 threaded rods.

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice


Mounting Hole Position (for Type ST & R)

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)


The track should be securely mounted in accordance with all applicable codes and standards.
Mounting points to be adjusted according to maximum loads (8 ft max.).

** See ONE TRACK installation instructions for more information.*


Top View 4 ft

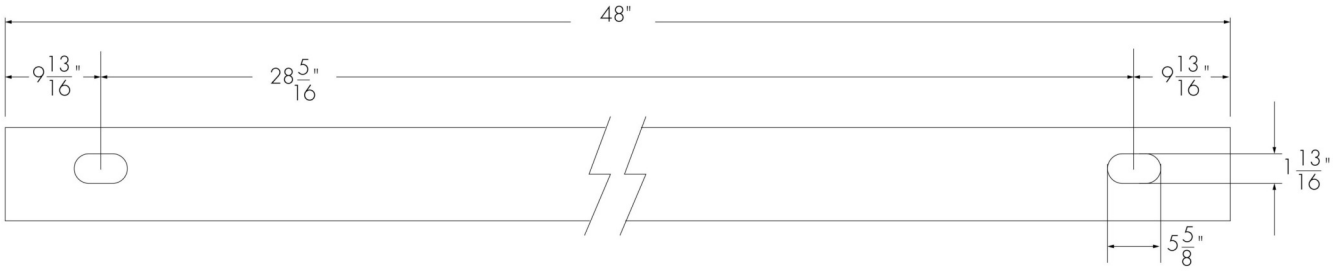

Top View 8 ft

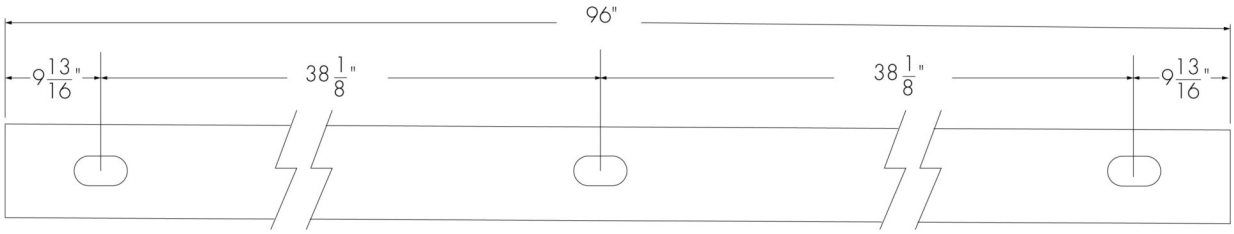


Top View 12 ft

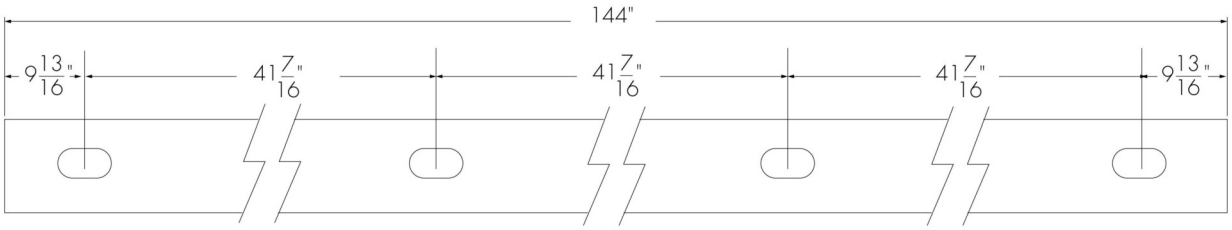

PLEASE ENSURE THAT THE DATA BUS WIRING DOES NOT CREATE A RING STRUCTURE. A FAILURE-FREE DATA BUS CANNOT BE ENSURED IF ONE IS PRESENT.

IF THE TRACK INSTALLATION REQUIRES THE USE OF "L", "T" OR "X" - SHAPED JOINT, IT IS POSSIBLE TO DISCONNECT THE DATA BUS IN THESE JOINTS TO AVOID CREATING A RING STRUCTURE.

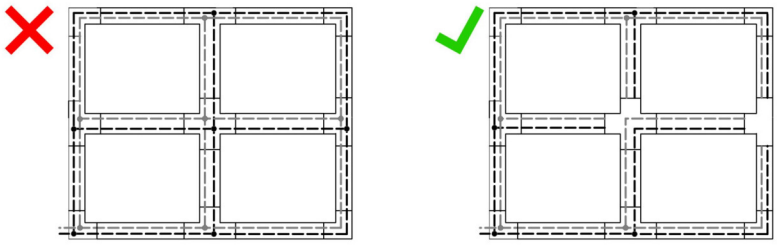



2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Typical Layout Linear (Examples with Type ST)

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)


Max 2400W PER CIRCUIT, 4800W TOTAL
MAX 120V - 60HZ PER CIRCUIT
MAX 20AMP PER CIRCUIT



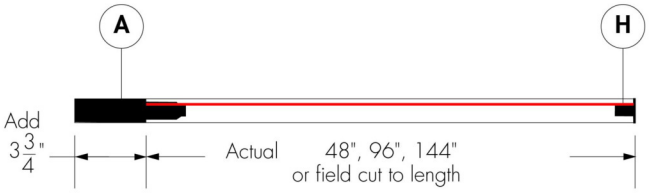

A Live End Feeds (Polarity Left) ..... (QTY 1)
9002/B-3C


H End Cap ..... (QTY 1)
9004/B

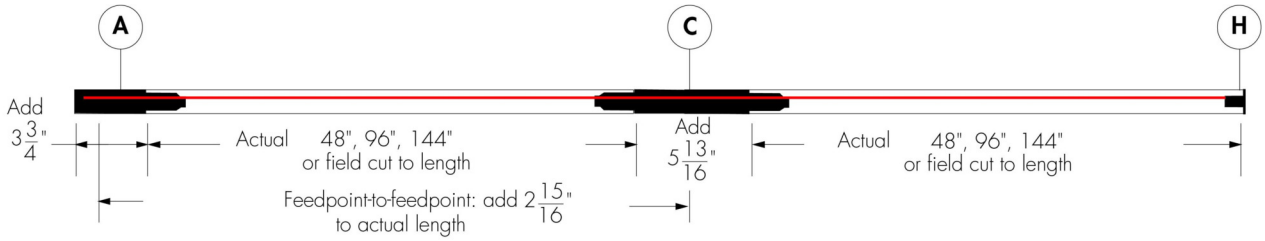

A Live End Feeds (Polarity Left) ..... (QTY 1)
9002/B-3C

C Midle Feed ..... (QTY 1)
9010/B-3C

H End Cap ..... (QTY 1)
9004/B

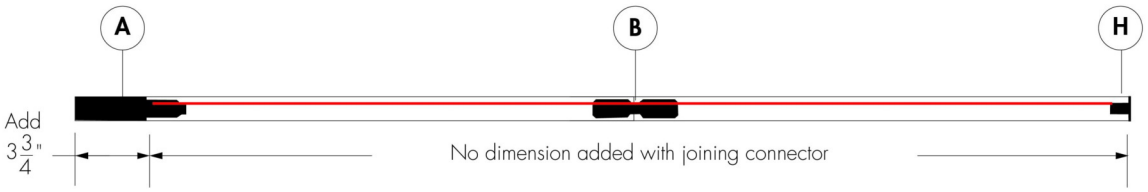

A Live End Feeds (Polarity Left) ..... (QTY 1)
9002/B-3C

B Joining Connector ..... (QTY 1)
9003/B

H End Cap ..... (QTY 1)
9004/B


2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice

Yashar Mains Surface Track

Track Three circuit / one neutral (20A) – 120 Volt, Polarized

Typical Layout 24'x16' Nominal (Examples with Type ST)

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

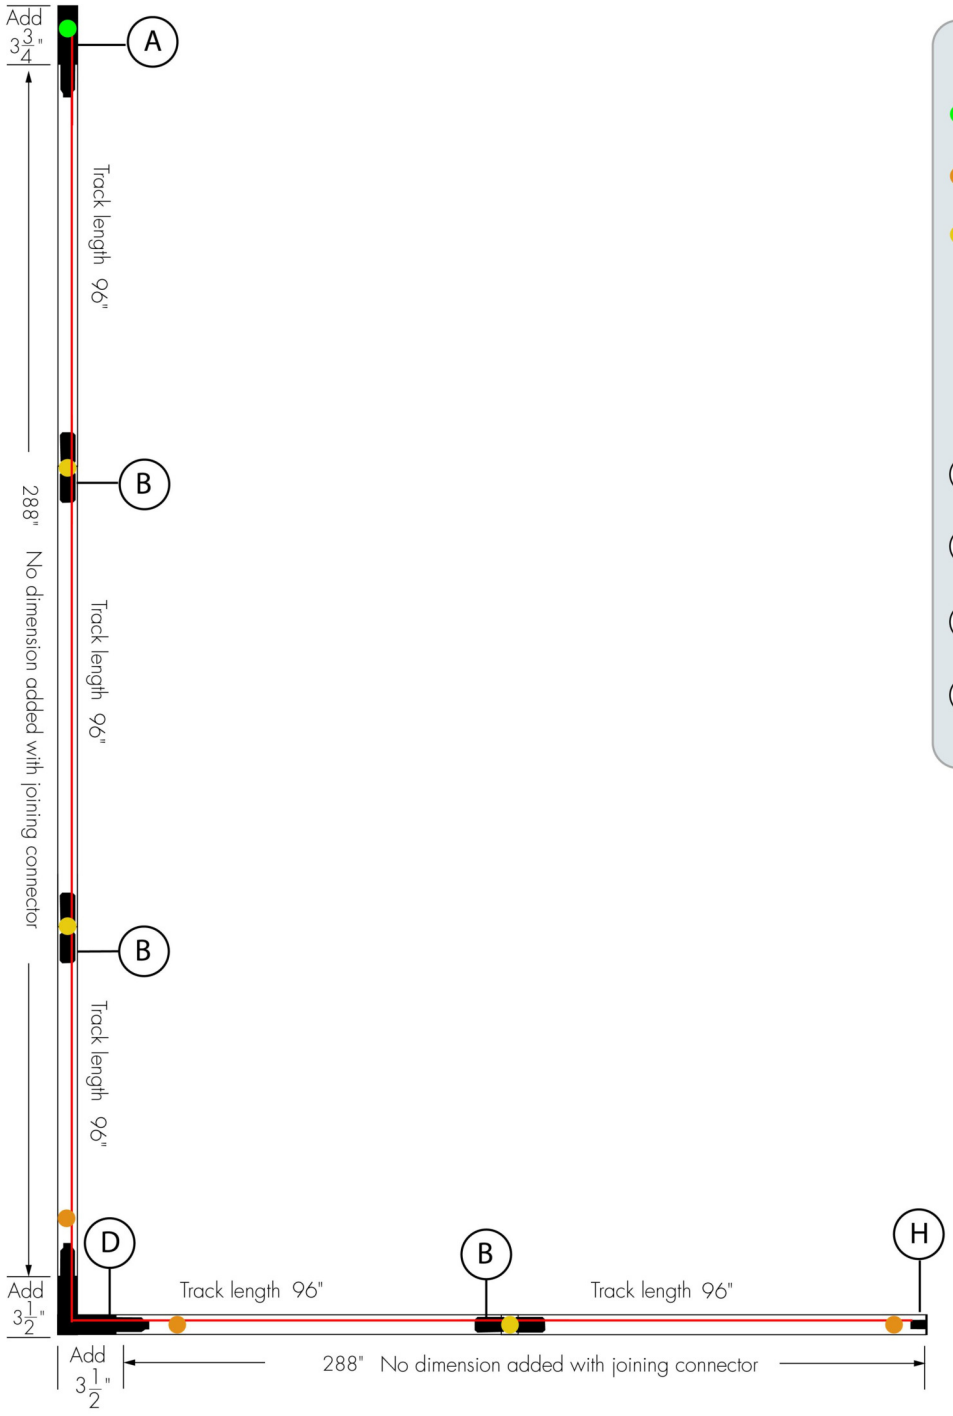

ONE TRACK UL ST 8ft
9000-UL8/B-ST-120 ..... (QTY 5)

Power Suspension Point
S-9000-P3-S-B-UL-36 ..... (QTY 1)

Non-Power Suspension Point
9000-KIT4-1.5 ..... (QTY 3)

Non-Power Suspension Point
9000-KIT8-1.5 ..... (QTY 3)

**When use above Joining Connector, Short Bracket must be replaced with Long Bracket S-9000/322-LA (not included in the kit).*

S-9000/322-LA ..... (QTY 3)

(A) Live End Feeds (Polarity Left)
9002/B-3C ..... (QTY 1)

(H) End Cap
9004/B ..... (QTY 1)

(B) Joining Connector
9003/B ..... (QTY 3)

(D) L- Feeds (Polarity Internal)
9011/B-3C ..... (QTY 1)

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971


2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice
Rev 1A - July 2026

Yashar Mains Surface Track

Track Three circuit / one neutral (20A) – 120 Volt, Polarized

Typical Layout 16'x24' Nominal (Examples with Type ST)

Preface all ordering codes with with YSMT-S- ex:
YSMT-S-9012/W3C
YSMT-S-9015/B3C
(See page 2)

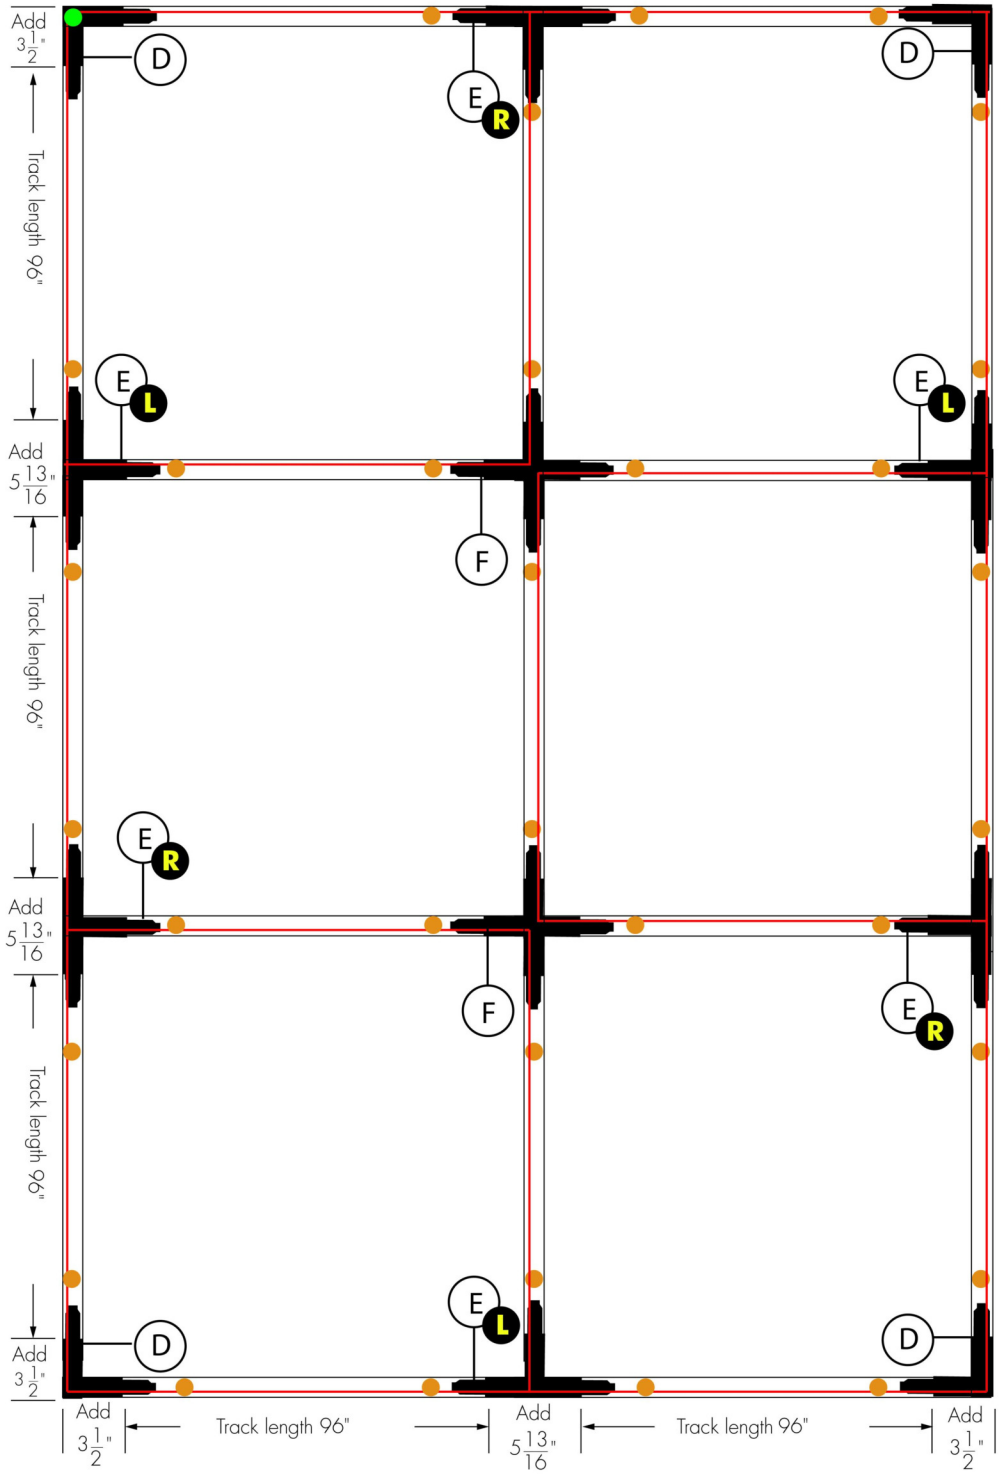

ONE TRACK UL ST 8ft
9000-UL8/B-ST-120 ..... (QTY 17)

Power Suspension Point
S-9000-P3-S-B-UL-36 ..... (QTY 1)

Non-Power Suspension Point
9000-KIT4-1.5 ..... (QTY 32)

(E L) T-Feed (Polarity Internal Left)
9015/B-3C ..... (QTY 3)

(E R) T-Feed (Polarity External Right)
9014/B-3C ..... (QTY 3)

(F) X-Feed
9017/B-3C ..... (QTY 2)

(D) L- Feeds (Polarity External)
9012/B-3C ..... (QTY 4)

Specialty Lighting Industries, Inc
1306 Doris Ave., Ocean, NJ 07712, USA
Tel. 732.517.0800 | Fax 732.517.0971

2026© Specialty Lighting Industries, Inc.
NOTE: These specifications are subject to change without notice
Rev 1A - July 2026