

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt


## The Yashar Family

The Yashar Mains is a 120V single circuit track and field cuttable, available in white or black painted. Our track is compatible with 0-10V, DALI and ELV/Triac dimming control protocols. Recessed, Surface and Pendant applications. *In addition to the mains version, Yashsar Low Voltage [48V] offers a 48 volt track with compatible track heads.*



**ST - CONFIGURATION**

**R - CONFIGURATION**

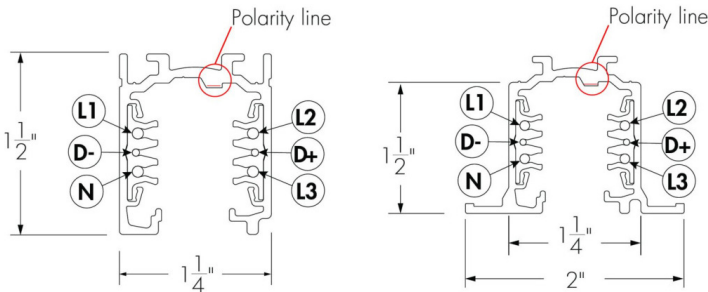

PROJECT:

TYPE:

SPECIFIER:

DATE:

## Key Points (YSMT-S)

### Housing

- Extruded aluminum single circuit track. Track is available in standard lengths of 4 foot (1200cm), 8 foot (2400cm) and 12 foot (3700cm) and cuttable in the field for custom lengths.
- Track system components include end caps, end and joiner feeds, straight joiners, corner joiners, T-joiners and X-joiners.
- Available in black or white painted finishes


### Electrical And Dimming Configurations

- 120 Volt track is furnished with separately powered bus bars, configured as single circuit track. In addition, there is a pair of data wires for DALI or 0-10V dimming control. DALI control allows dimming control of individual fixtures. 0-10V dimming control provides a single zone of dimming, combining the power circuits on a single control zone. ELV/Triac dimming (with ELV/Triac driver on track heads) is also available.
- Current limiters available in range between 0.5 Amps and 12 Amps.

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Surface Mount Track Configuration

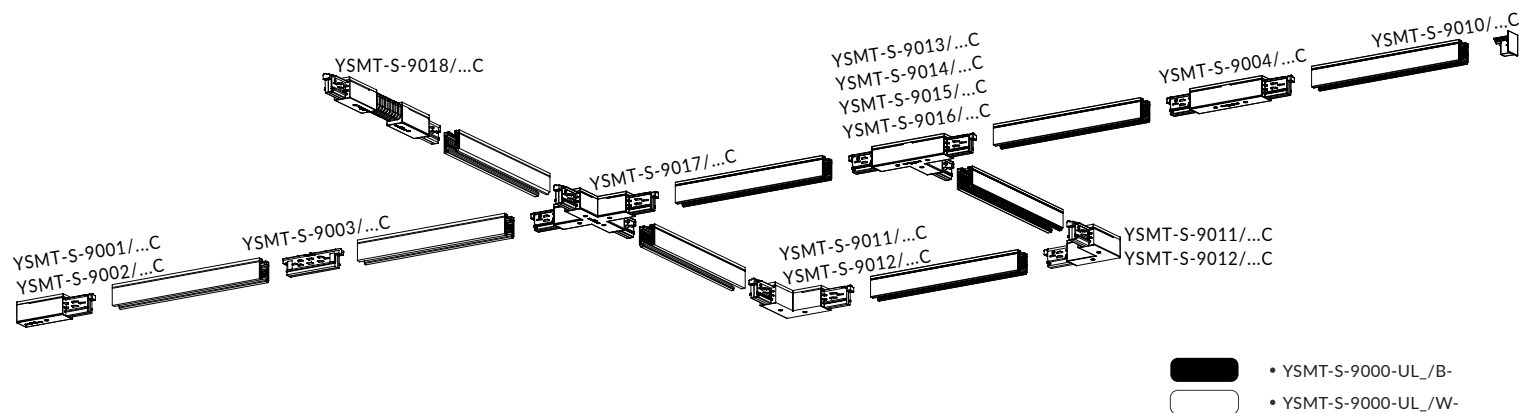

Ordering Code Example for a 120 Volt, L configuration, White track with 11ftx3ft long legs & 3 amp current limiters on each circuit:

(1) YSMT-S-9000-UL12/W-ST2-120  
(12ft long track to be field cut)

(1) YSMT-S-9000-UL4/W-ST2-120  
(4ft long track to be field cut)


(1) YSMT-S-9012/W-2C  
(Corner connector)

(1) YSMT-S-9004-CL-S/W  
(End cap for non-feed end)


(1) YSMT-S-9001-CL/W-2C  
(End feed/current limiter housing)

(1) YSMT-S-CL3  
(3 amp current limiter)

(1) YSMT-S-S-9000/T-US  
(Cutting tool for track conductors)



### Surface Track Options

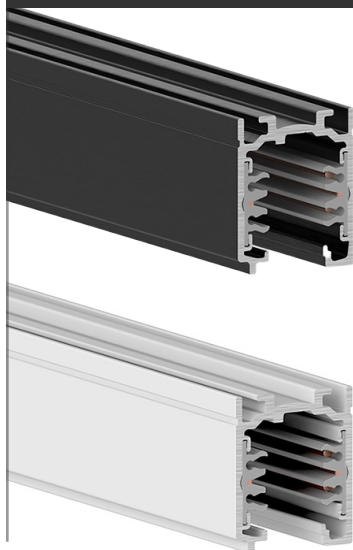


-  YSMT-S-9000-UL4/B- (Black Track 120V [RAL 901] 4 Feet)
-  YSMT-S-9000-UL8/B- (Black Track 120V [RAL 9010] 8 Feet)
-  YSMT-S-9000-UL12/B- (Black Track 120V [RAL 9010] 12 Feet)
-  YSMT-S-9000-UL4/W- (White Track 120V [RAL 9005] 4 Feet)
-  YSMT-S-9000-UL8/W- (White Track 120V [RAL 9005] 8 Feet)
-  YSMT-S-9000-UL12/W- (White Track 120V [RAL 9005] 12 Feet)

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Recessed Track Configuration

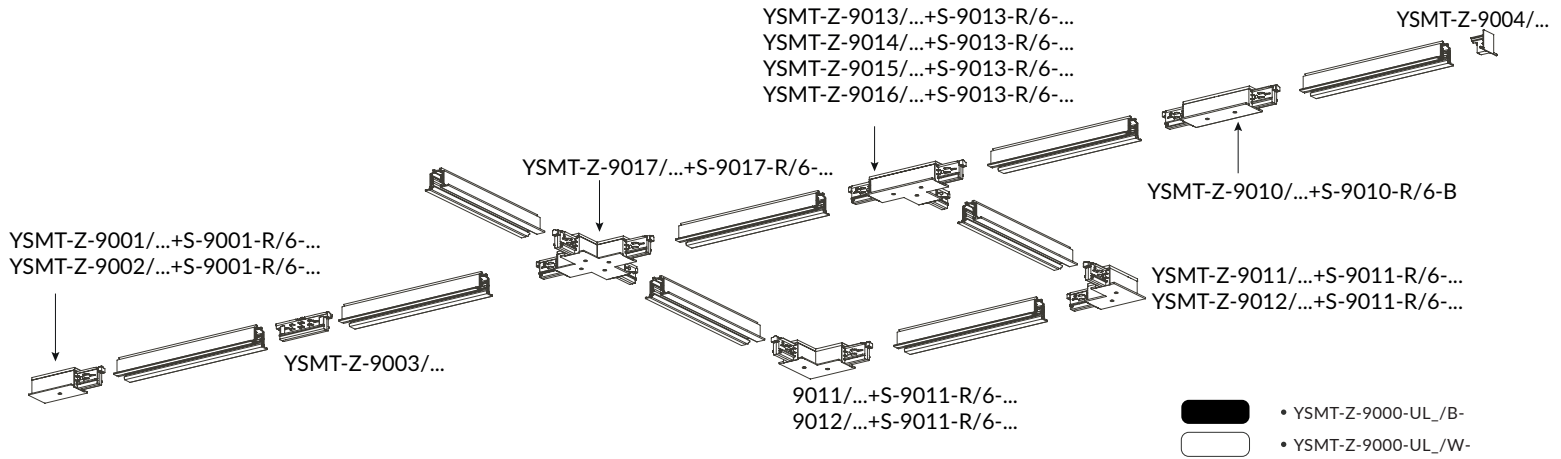

Ordering Code Example for a 120 Volt, L configuration, White track with 11ftx3ft long legs & 3 amp current limiters on each circuit:

(1) YSMT-Z-9000-UL12/W-ST2-120  
(12ft long track to be field cut)

(1) YSMT-Z-9004-CL-S/W  
(End cap for non-feed end)

(1) YSMT-S-S-9000/T-US  
(Cutting tool for track conductors)

(1) YSMT-Z-9000-UL4/W-ST2-120  
(4ft long track to be field cut)


(1) YSMT-S-9001-CL/W-2C  
(End feed/current limiter housing)

(1) YSMT-Z-9013/W-2C  
(Corner connector)

(1) YSMT-Z-CL3  
(3 amp current limiter)



### Recessed Track Options

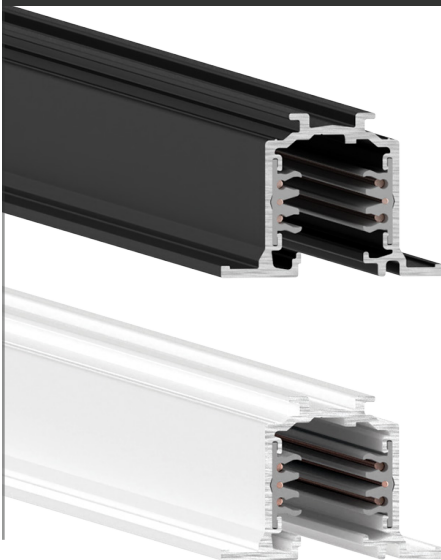

- YSMT-Z-9000-UL4/B-R (Black Track 120V [RAL 901] 4 Feet)
- YSMT-Z-9000-UL8/B-R (Black Track 120V [RAL 9010] 8 Feet)
- YSMT-Z-9000-UL12/B-R (Black Track 120V [RAL 9010] 12 Feet)
- YSMT-Z-9000-UL4/W-R (White Track 120V [RAL 9005] 4 Feet)
- YSMT-Z-9000-UL8/W-R (White Track 120V [RAL 9005] 8 Feet)
- YSMT-Z-9000-UL12/W-R (White Track 120V [RAL 9005] 12 Feet)

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt


## Feed & End Caps (for Type ST & Type R)

### Live End Feeds

2 x 7/8in Knockout available.




L-End Feed Polarity Right  
 Black **9001/B-3C**  
 White **9001/W-3C**



2 x 7/8in Knockout available.



R-End Feed Polarity Right  
 Black **9002/B-3C**  
 White **9002/W-3C**



Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)




### T-Feeds

1 x 7/8in Knockout available.




T-End Polarity External Left  
Earthing Internal Right  
 Black **9013/B-3C**  
 White **9013/W-3C**




1 x 7/8in Knockout available.




T-End Polarity External Right  
Earthing Internal Left  
 Black **9014/B-3C**  
 White **9014/W-3C**



1 x 7/8in Knockout available.




T-End Polarity External Left  
Earthing Internal Right  
 Black **9015/B-3C**  
 White **9015/W-3C**



1 x 7/8in Knockout available.



T-Feed Polarity Internal  
Right/Earthing External Left  
 Black **9016/B-3C**  
 White **9016/W-3C**




### L-Feeds

1 x 7/8in Knockout available.




L-End Feed Polarity Internal  
Earthing External  
 Black **9012/B-3C**  
 White **9012/W-3C**



1 x 7/8in Knockout available.




L-End Feed Polarity Internal  
Earthing External  
 Black **9011/B-3C**  
 White **9011/W-3C**




### X-Feeds

x 7/8in Knockout available.



X-Feed  
 Black **9017/B-3C**  
 White **9017/W-3C**




### Middle Feed

1 x 7/8in Knockout available.




Middle Feed  
 Black **9010/B-3C**  
 White **9010/W-3C**



### Joining Connector



Joining Connector  
 Black **9003/B**  
 White **9003/W**




Longer brackets are required for suspension above these parts.


# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt


## Adjustable Corner

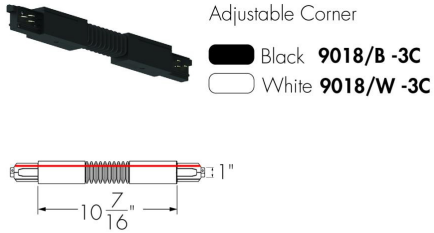

## End Cap (Type ST)

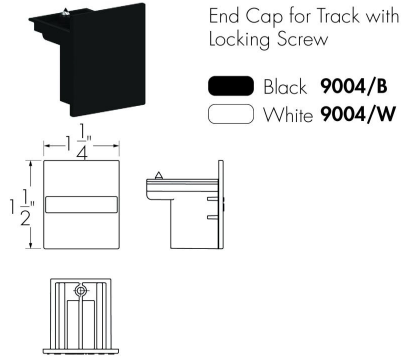


## End Cap (Type R)

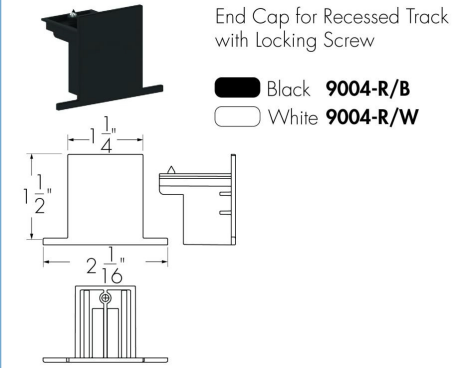


## Plastic Feed Covers for Recessed Track (for Type R)


### Live End Feed Cover

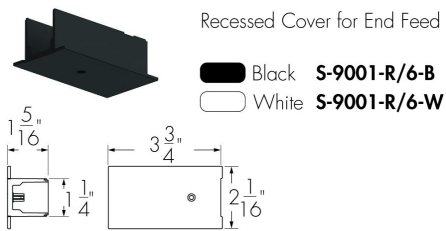


### Middle Feed Cover

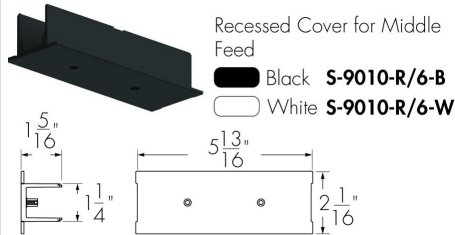


### L Feed Cover

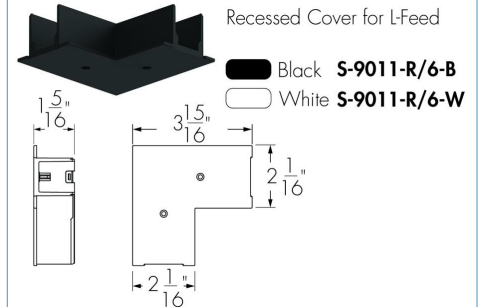



### T Feed Cover

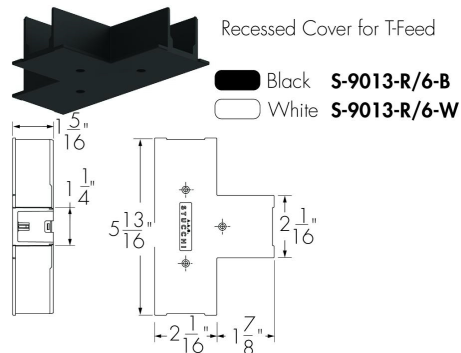

### X Feed Cover

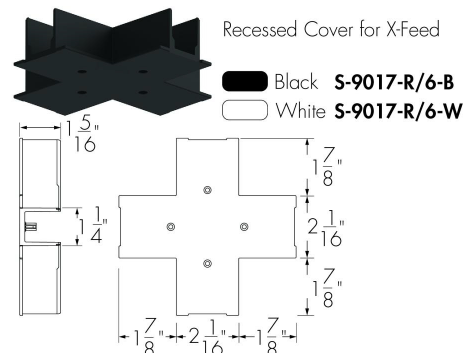

## Plastic Feed Covers (for Type ST & Type R)

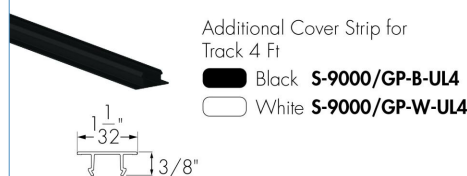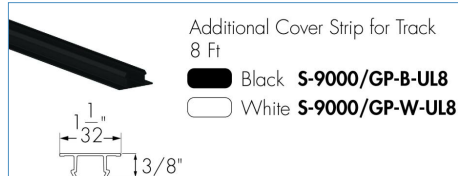

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)



# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt


## Feed for Installation of Current Limiters (for Type ST and Type R)



L- End Feed with Circuit Breaker for 3c\*

Black **9001-CL/B-3C**


White **9001-CL/W-3C**



R- End Feed with Circuit Breaker for 3c\*

Black **9002-CL/B-3C**

White **9002-CL/W-3C**



Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)



\* In this enclosure the client must specify and install 3 individual single pole circuit protectors (resistor / current limiter) as required for the project. Frequency and Delay setting: 2 (Slow DC 50/60Hz) [by others]. Circuit protectors are to be sourced and supplied by others. Contact the factory for assistance or any questions you may have.

## Reinforcing Brackets (RB)

Required when a rigid 3/8" stem is used for both mechanical suspension and electrical feed. In this case no additional mounting point (aircraft cable) is installed.


### RB for Live End Feeds



Reinforcing Bracket for End Feed

Black **S-9001/SU-B**

White **S-9001/SU-W**




### RB for Middle-Feed



Reinforcing Bracket for Middle Feed

Black **S-9010/SU-B**

White **S-9010/SU-W**




### RB for L Feed



Reinforcing Bracket for L-Feed

Black **S-9011/SU-B**

White **S-9011/SU-W**




### RB for X Feed



Reinforcing Bracket for X-Feed

Black **S-9017/SU-B**

White **S-9017/SU-W**

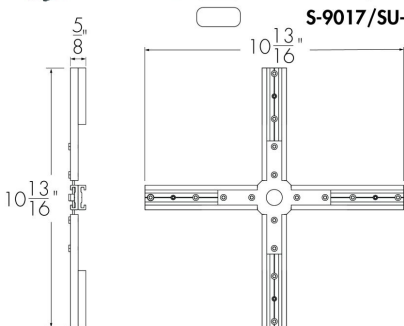


### RB for T Feed



Reinforcing Bracket for T-Feed

Black **S-9013/SU-B**

White **S-9013/SU-W**



Suspension Accessories for Power Suspension Points (Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)



\* Dimensions available upon request.  
\* All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit P3 - Power Side

Black

S-9000-P3-P-B-UL-36

S-9000-P3-P-B-UL-120

S-9000-P3-P-B-UL-200

White

S-9000-P3-P-W-UL-36

S-9000-P3-P-W-UL-120

S-9000-P3-P-W-UL-200

Suspension Accessories for Non-Power Suspension Points (Type ST)

Suspension Kit P3 - Non-Power Side

Black

S-9000-P3-S-B-UL-36

S-9000-P3-S-B-UL-120

S-9000-P3-S-B-UL-200

White

S-9000-P3-S-W-UL-36

S-9000-P3-S-W-UL-120

S-9000-P3-S-W-UL-200

Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)



\* Dimensions available upon request.  
\* All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 4

9000-KIT4-1.5  
9000-KIT4-3  
9000-KIT4-5

Individual Components

Ceiling Attachment

Round Head Ceiling Attachment  
S-9000/216

Suspension Cable

Steel Cable with Spherical End  
Ø 0.05 in  
S-9000/211-S-1,5 59in  
S-9000/211-S-3 118in  
S-9000/211-S-5 197in

Clamp and Gripper

Clamp with Automatic Gripper  
S-9000/116

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)




\* Dimensions available upon request.

\* All Suspension Accessories can be purchased as kits or as individual components.

### Suspension Kit 5

 Black  
**9000-KIT5-1.5-B**  
**9000-KIT5-3-B**  
**9000-KIT5-5-B**

 White  
**9000-KIT5-1.5-W**  
**9000-KIT5-3-W**  
**9000-KIT5-5-W**

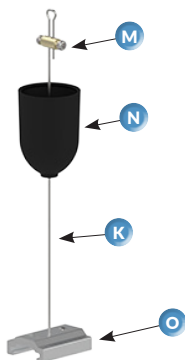

## Individual Components

### Ceiling Attachment

M



Screw Gripper  
**S-9000/215**

### Plastic Cup

N



Plastic Cup for Steel Cable  
Ø0.05 in  
 Black **S-9000/3-B**  
 White **S-9000/3-W**

### Pendant Bracket

O



Short Pendant Bracket for Suspensions  
(use with Steel Cable with Spherical End)

 Black **S-9000/312-SV-B**  
 White **S-9000/312-SV-W**

If mounting kit is used above the Joining Connector (9003/B or 9003/W), please note that the **Short Pendant Bracket (S-9000/312-SV)** must be replaced with a **Long Pendant Bracket (S-9000/322-SV)** which is not included in Suspension Kit.



Long Pendant Bracket for Suspensions  
to be used when Tracks are connected  
with a 9003 Joint (use with Steel  
Cable with Spherical End).

 Black **S-9000/322-SV-B**  
 White **S-9000/322-SV-W**

### Suspension Cable

K



Steel Cable with Spherical End  
Ø 0.05 in

**S-9000/211-S-1,5** 59in  
**S-9000/211-S-3** 118in  
**S-9000/211-S-5** 197in

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)




\* Dimensions available upon request.

\* All Suspension Accessories can be purchased as kits or as individual components.

### Suspension Kit 6

Black  
**9000-KIT6-1.5-B**  
**9000-KIT6-3-B**  
**9000-KIT6-5-B**

White  
**9000-KIT6-1.5-W**  
**9000-KIT6-3-W**  
**9000-KIT6-5-W**



## Individual Components

### Ceiling Attachment

M



Screw Gripper  
**S-9000/215**

### Plastic Cup

N



Plastic Cup for Steel Cable  
Ø0.05 in  
Black **S-9000/3-B**  
White **S-9000/3-W**

### Suspension Cable

P



Steel Cable Ø0.05 in  
**S-9000/211-1,5** 59in  
**S-9000/211-3** 118in  
**S-9000/211-5** 197in

### Automatic Gripper & Screw

Q



Automatic M5 Threaded Gripper  
with integrated balancing cylinder  
and side hole  
**S-9000/218**



Screw  
**602/F**

### Bracket with Countersunk Hole

R



Short Pendant Bracket with Countersunk Hole for Suspensions

Black **S-9000/312-LA-B**  
White **S-9000/312-LA-W**

If mounting kit is used above the Joining Connector (9003/B or 9003/W), please note that the **Short Pendant Bracket (S-9000/312-LA)** must be replaced with a **Long Pendant Bracket (S-9000/322-LA)** which is not included in Suspension Kit.



Long Pendant Bracket with Countersunk Hole for Suspensions to be used when Tracks are Connected with a 9003 Joint.

Black **S-9000/322-LA-B**  
White **S-9000/322-LA-W**

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)



\* Dimensions available upon request.

\* All Suspension Accessories can be purchased as kits or as individual components.

### Suspension Kit 8


9000-KIT8-1.5  
9000-KIT8-3  
9000-KIT8-5

Black

9000-KIT8-1.5-B  
9000-KIT8-3-B  
9000-KIT8-5-B

White

9000-KIT8-1.5-W  
9000-KIT8-3-W  
9000-KIT8-5-W



## Individual Components

### Ceiling Attachment



Round Head Ceiling Attachment  
**S-9000/216**

### Suspension Cable



Steel Cable with Spherical End  
Ø 0.05 in

**S-9000/211-S-1,5** 59in  
**S-9000/211-S-3** 118in  
**S-9000/211-S-5** 197in

### Bracket with Countersunk Hole



Short Pendant Bracket with Countersunk Hole for Suspensions

Black **S-9000/312-LA-B**  
White **S-9000/312-LA-W**

If mounting kit is used above the Joining Connector (9003/B or 9003/W), please note that the **Short Pendant Bracket (S-9000/312-LA)** must be replaced with a **Long Pendant Bracket (S-9000/322-LA)** which is not included in Suspension Kit.



Long Pendant Bracket with Countersunk Hole for Suspensions to be used when Tracks are Connected with a 9003 Joint.

Black **S-9000/322-LA-B**  
White **S-9000/322-LA-W**

### Automatic Gripper & Screw



Automatic M5 Threaded Gripper  
with integrated balancing cylinder  
and side hole  
**S-9000/218**



Screw  
**602/F**

Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)



\* Dimensions available upon request.  
\* All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 1

9000-KIT1-1.5  
9000-KIT1-3  
9000-KIT1-5

Individual Components

Ceiling Attachment

J

Screw Gripper  
S-9000/215

Suspension Cable

P

Steel Cable Ø0.05 in  
S-9000/211-1,5 59in  
S-9000/211-3 118in  
S-9000/211-5 197in

Clamp and Gripper

L

Clamp with Automatic Gripper  
S-9000/116

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)




\* Dimensions available upon request.

\* All Suspension Accessories can be purchased as kits or as individual components.

### Suspension Kit 2

- Black
  - 9000-KIT2-1.5-B
  - 9000-KIT2-3-B
  - 9000-KIT2-5-B
- White
  - 9000-KIT2-1.5-W
  - 9000-KIT2-3-W
  - 9000-KIT2-5-W



## Individual Components

### Ceiling Attachment

M



Screw Gripper  
**S-9000/215**

### Suspension Cable

K



Steel Cable with Spherical End  
Ø 0.05 in  
**S-9000/211-S-1,5** 59in  
**S-9000/211-S-3** 118in  
**S-9000/211-S-5** 197in

### Ceiling Bracket

S



Ceiling Brackets for Suspensions  
**S-9000/132**

### T-Fixing Clamp

T



Painted Track Fast Fixing Clamp  
☒ Black **S-9000/115-B**  
☐ White **S-9000/115-W**

### Plastic Cup

N



Plastic Cup for Steel Cable  
Ø0.05 in  
☒ Black **S-9000/3-B**  
☐ White **S-9000/3-W**

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Suspension Accessories for Non-Power Suspension Points (Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)




\* Dimensions available upon request.

\* All Suspension Accessories can be purchased as kits or as individual components.

### Suspension Kit 3

-  Black  
**9000-KIT3-1.5-B**  
**9000-KIT3-3-B**  
**9000-KIT3-5-B**
-  White  
**9000-KIT3-1.5-W**  
**9000-KIT3-3-W**  
**9000-KIT3-5-W**



## Individual Components

### Ceiling Attachment



Screw Gripper  
**S-9000/215**

### Suspension Cable



Steel Cable with Spherical End  
Ø 0.05 in  
**S-9000/211-S-1,5** 59in  
**S-9000/211-S-3** 118in  
**S-9000/211-S-5** 197in

### Plastic Cup



Plastic Cup for Steel Cable  
Ø0.05 in  
 Black **S-9000/3-B**  
 White **S-9000/3-W**

### Clamp and Gripper



Clamp with Automatic Gripper  
**S-9000/116**

### Suspension Kit P1 Stem

-  Black  
**S-9000-P1-B-UL**
-  White  
**S-9000-P1-W-UL**

-  Black  
**9000-SF/12-B**  
**9000-SF/18-B**  
**9000-SF/24-B**  
**9000-SF/36-B**  
**9000-SF/48-B**



Stem to be ordered separately

-  White  
**9000-SF/12-W**  
**9000-SF/18-W**  
**9000-SF/24-W**  
**9000-SF/36-W**  
**9000-SF/48-W**

3/8 in thread on each end of the Stem.

### Suspension Kit P2 Stem

-  Black  
**S-9000-P2-B-UL**
-  White  
**S-9000-P2-W-UL**

-  Black  
**9000-SF/12-B**  
**9000-SF/18-B**  
**9000-SF/24-B**  
**9000-SF/36-B**  
**9000-SF/48-B**



Stem to be ordered separately

-  White  
**9000-SF/12-W**  
**9000-SF/18-W**  
**9000-SF/24-W**  
**9000-SF/36-W**  
**9000-SF/48-W**

3/8 in thread on each end of the Stem.

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Additional Mounting Accessories

\* Dimensions available upon request.

\* All Suspension Accessories can be purchased as kits or as individual components.

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)



### Fixing Clamp for Suspension



Black

**S-9000/114-T-B**



White

**S-9000/114-T-W**



### Stem Bracket

**S-9000/112-BT**



Optional Bracket to secure stem to track if not using hardware already provided with Stem Kit P1 or P2.

### Suspension Bracket with Automatic Gripper

**S-9000/231**



### Ceiling Clamp for Surface Mount

**S-9000/111**



Optional clamp to be used for approx. 9mm space-off between track and surface.

### Automatic Gripper for Aircraft Cable

**S-9000/214**



### Fixing Clamp for 15/16 in T-bar



Black

**S-9000/119-TB-B**



White

**S-9000/119-TB-W**



If Fixing clamp for 9/16" Tbar is required, please consult factory.

### R-Brace

**S-9000/131**



Black

**S-9000/131-B**



White

**S-9000/131-W**



Optional clamp to be used for approximately 9.50mm space-off between track and surface.

Optional clamp to be used with 1/4-20 threaded rods.

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Mounting Hole Position (for Type ST & R)


The track should be securely mounted in accordance with all applicable codes and standards.  
Mounting points to be adjusted according to maximum loads (8 ft max.).

\* See ONE TRACK installation instructions for more information.


Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)




### Top View 4 ft

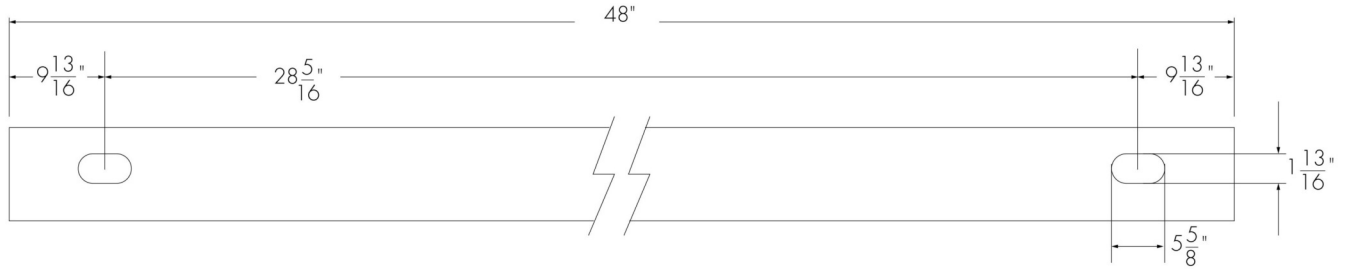

### Top View 8 ft


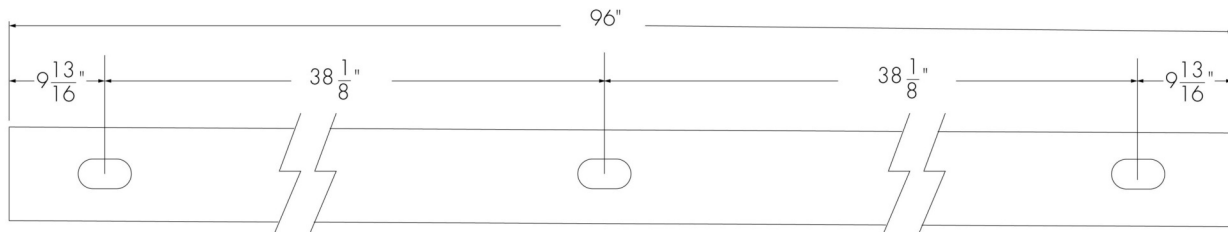


### Top View 12 ft

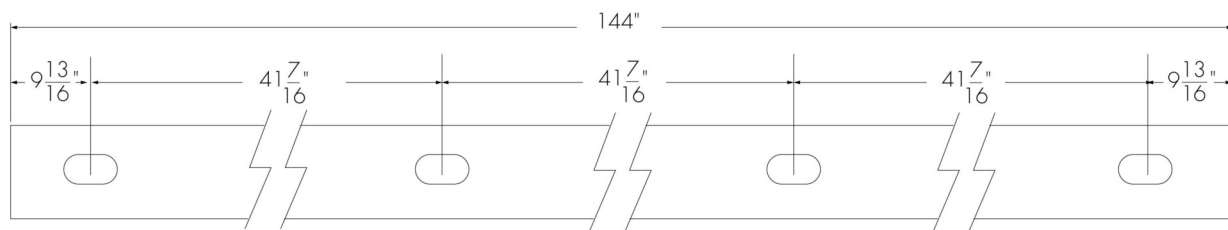

**PLEASE ENSURE THAT THE DATA BUS WIRING DOES NOT CREATE A RING STRUCTURE. A FAILURE-FREE DATA BUS CANNOT BE ENSURED IF ONE IS PRESENT.**

**IF THE TRACK INSTALLATION REQUIRES THE USE OF "L", "T" OR "X" - SHAPED JOINT, IT IS POSSIBLE TO DISCONNECT THE DATA BUS IN THESE JOINTS TO AVOID CREATING A RING STRUCTURE.**



# Yashar Mains Surface Track





Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Typical Layout Linear (Examples with Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)



Max 2400W PER CIRCUIT, 4800W TOTAL  
MAX 120V - 60HZ PER CIRCUIT  
MAX 20AMP PER CIRCUIT

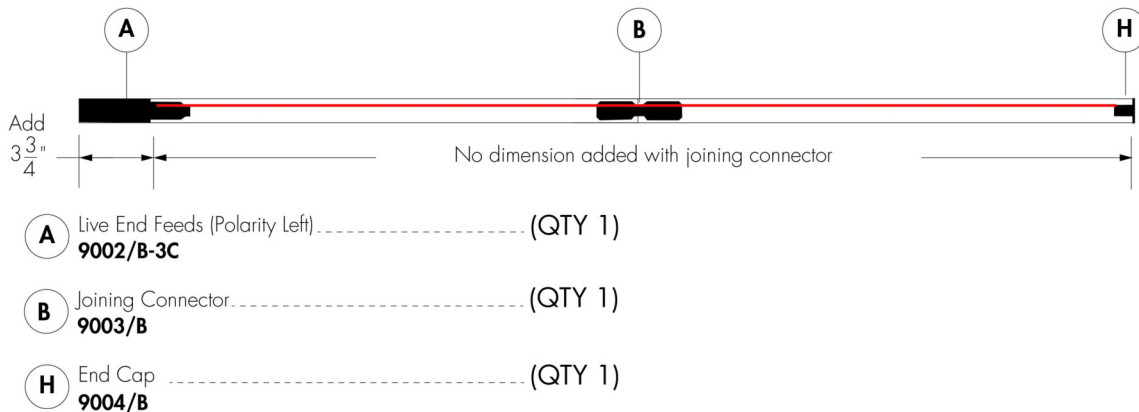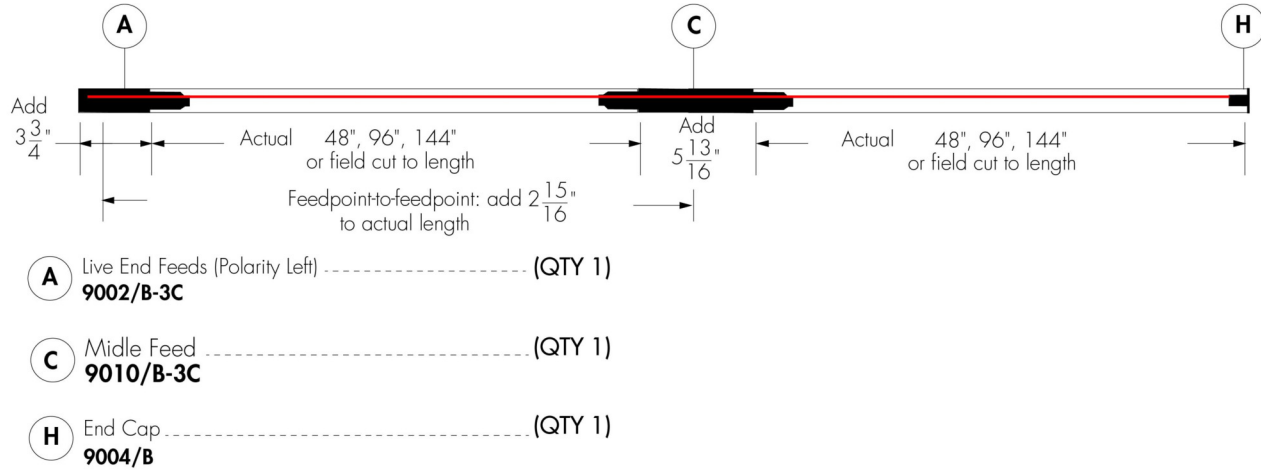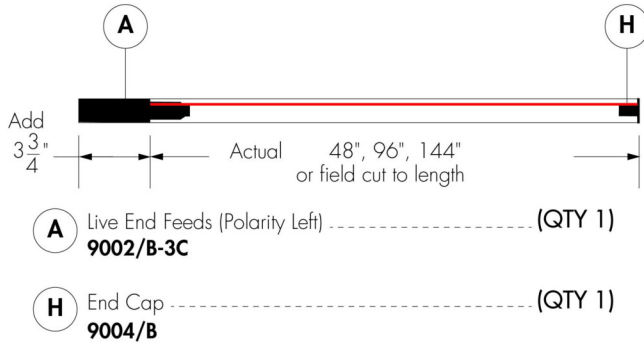


# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Typical Layout 24'x16' Nominal (Examples with Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)

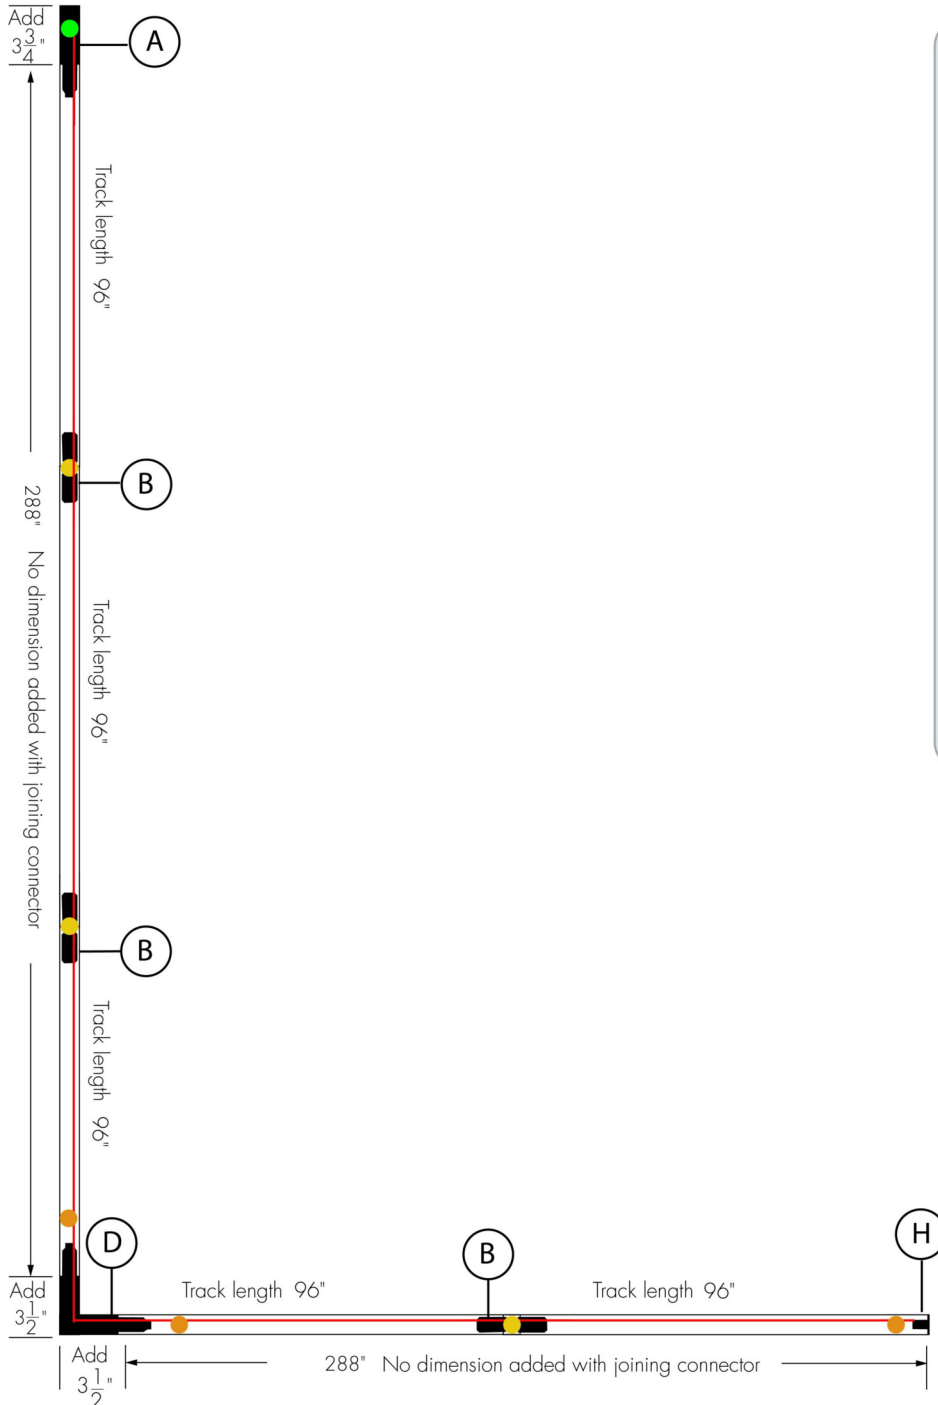

ONE TRACK UL ST 8ft  
**9000-UL8/B-ST-120** ..... (QTY 5)

● Power Suspension Point  
**S-9000-P3-S-B-UL-36** ..... (QTY 1)

● Non-Power Suspension Point  
**9000-KIT4-1.5** ..... (QTY 3)

● Non-Power Suspension Point  
**9000-KIT8-1.5** ..... (QTY 3)

*\*When use above Joining Connector, Short Bracket must be replaced with Long Bracket S-9000/322-LA (not included in the kit).*

**S-9000/322-LA** ..... (QTY 3)

Ⓐ Live End Feeds (Polarity Left)  
**9002/B-3C** ..... (QTY 1)

Ⓗ End Cap  
**9004/B** ..... (QTY 1)

Ⓑ Joining Connector  
**9003/B** ..... (QTY 3)


Ⓓ L- Feeds (Polarity Internal)  
**9011/B-3C** ..... (QTY 1)

# Yashar Mains Surface Track

Single Circuit track with 0-10 volt, DALI or ELV/Triac control  
120 volt

## Typical Layout 16'x24' Nominal (Examples with Type ST)

Preface all ordering codes with YSMT-S-  
ex:  
YSMT-S-9012/W3C  
YSMT-S-9015/B3C  
(See page 2)

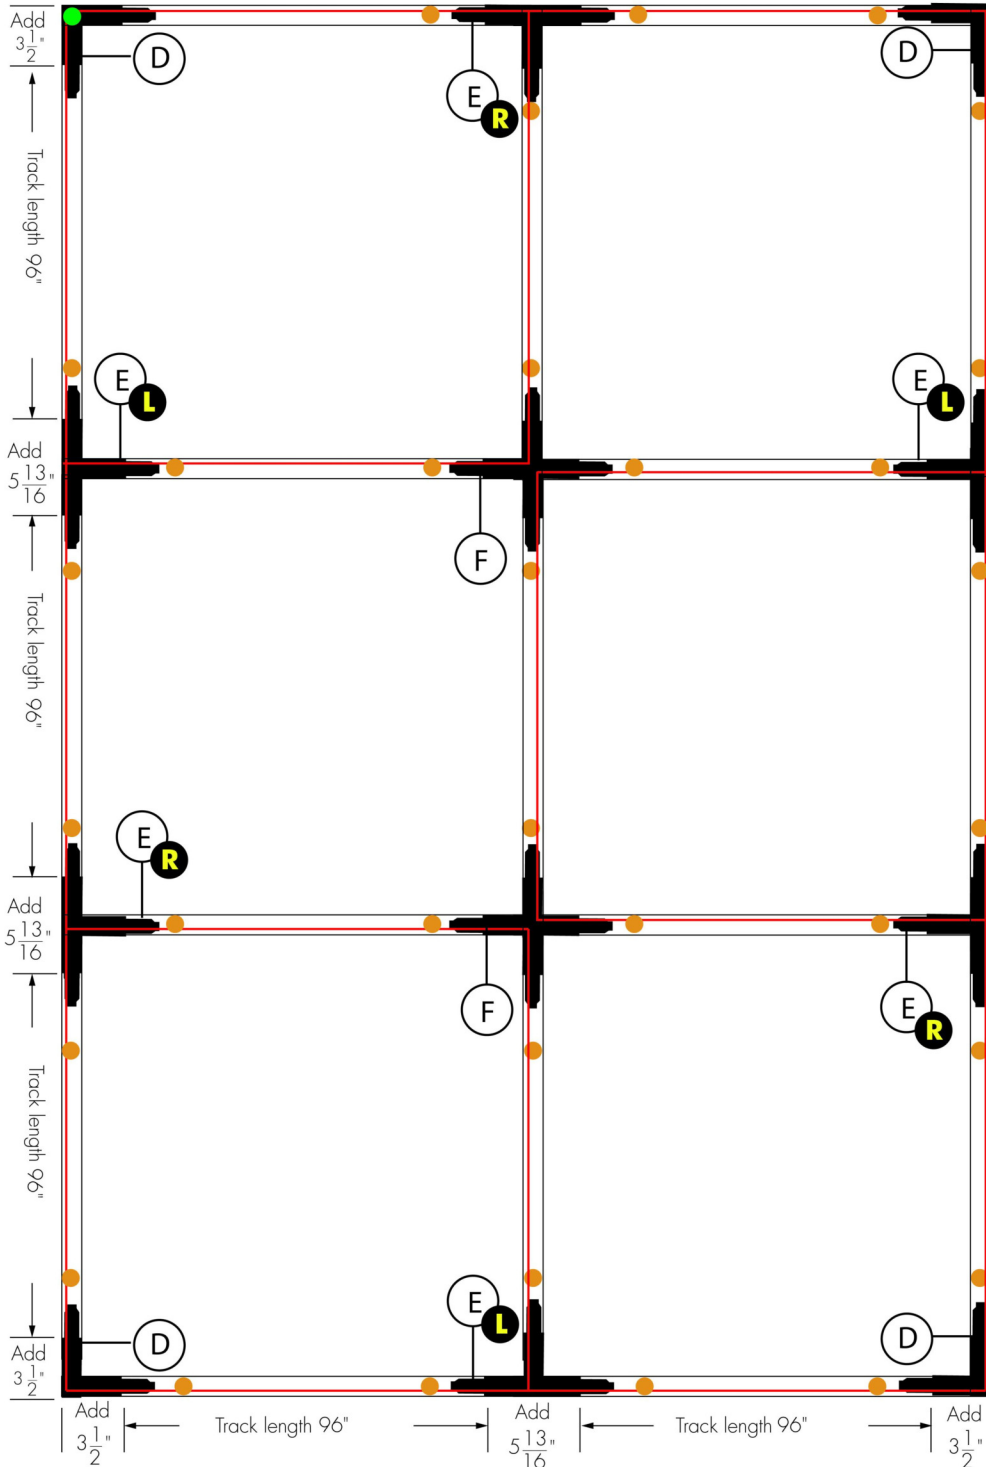

|                                    |                |
|------------------------------------|----------------|
| ONE TRACK UL ST 8ft                |                |
| <b>9000-UL8/B-ST-120</b>           | ..... (QTY 17) |
| ● Power Suspension Point           |                |
| <b>S-9000-P3-S-B-UL-36</b>         | ..... (QTY 1)  |
| ● Non-Power Suspension Point       |                |
| <b>9000-KIT4-1.5</b>               | ..... (QTY 32) |
| ⓔ T-Feed (Polarity Internal Left)  |                |
| ⓔ <b>9015/B-3C</b>                 | ..... (QTY 3)  |
| ⓔ T-Feed (Polarity External Right) |                |
| ⓔ <b>9014/B-3C</b>                 | ..... (QTY 3)  |
| ⓕ X-Feed                           |                |
| <b>9017/B-3C</b>                   | ..... (QTY 2)  |
| ⓓ L-Feeds (Polarity External)      |                |
| <b>9012/B-3C</b>                   | ..... (QTY 4)  |