

FLEX-CYLINDER ADJUSTABLE DOWNLIGHT

■ 1018 LED

Single lamp, solid state light engine, surface mounted nominal 4" (50mm) adjustable down light. Multiple options with head cylinder capable of 360° rotation.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum

MOUNTING

- Surface mount

ELECTRICAL

- Integral electronic driver with internal short circuit protection



LAMP

- LED supplied with fixture

SOCKET

- Precision aluminum machined lampholder assembly

LENS

- Interchangeable reflector provides multiple beam patterns
- Optional borosilicate lenses available for aperture


TRIM

- Anodized aluminum reflector cone

FINISH


- Available in black, white, or aluminum as standard
- Additional colors and RAL palette available
- Consult factory for custom finishes

LABELS

-  , US tested to UL standards 1598, Damp location



Patent Pending.
These specifications subject to change without notice.

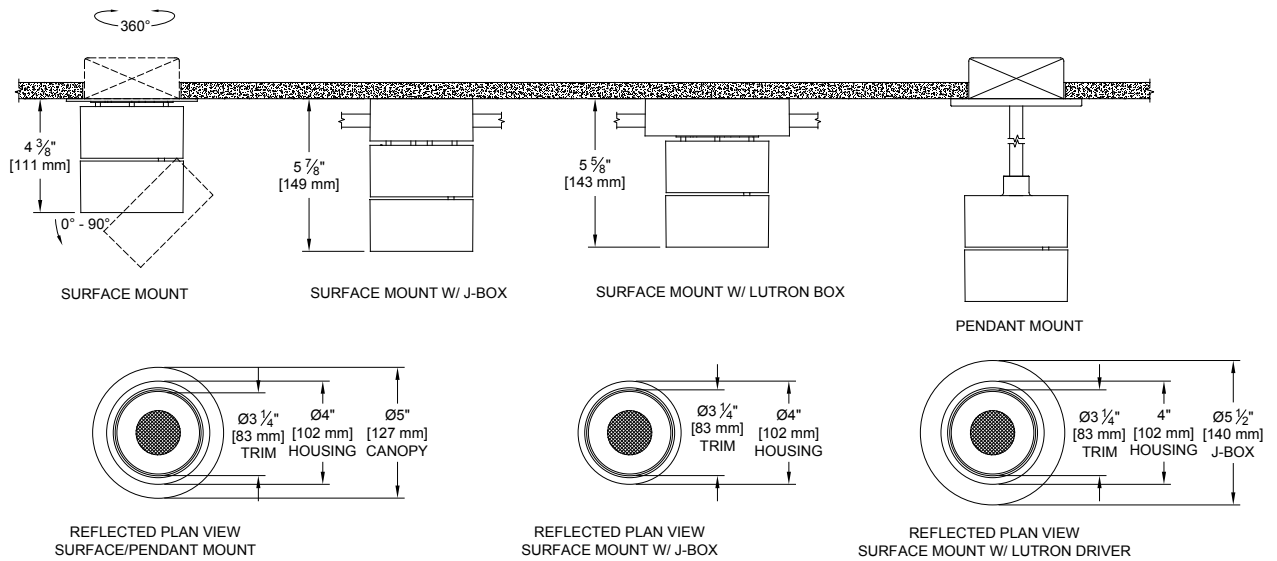

ORDERING INFORMATION

1018-LED-SH	SOURCE / DRIVER	BEAMSPREAD	TRIM FINISH	HOUSING FINISH	APERTURE LENS	ACCESSORIES
	/					/
9 = 90+CRI 27 =2700K 30 =3000K 35 =3500K 40 =4000K AD = Ambient Dim Max 3000K-1900K	<ul style="list-style-type: none"> CZ14=120-277v, 14W 1100lm AD14=350ma, 14.5W,1000lm C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) E1* =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2* =EldoLED DALI, 0.1%, 120-277v E3* =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Lutron Hi-lume 1% 2-wire LED driver (120v forward phase) LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black 	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees 60 = 60 Degrees	P14 = White BLK = Black ANA = Aluminum CST = Custom	P14 = White BLK = Black ANA = Aluminum CST = Custom	Blank = None 90A = Clear 91A = Solite 92A = Supertex 93A = Frosted	JB = Junction Box LJB = Lutron Junction Box PM = Pendant Mount (Pendant wire length below*) 12 = 12" wire length 24 = 24" wire length 36 = 36" wire length 48 = 48" wire length CST = Custom

