
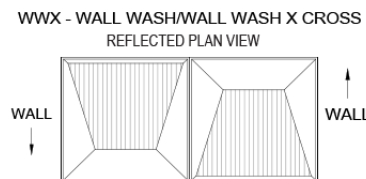
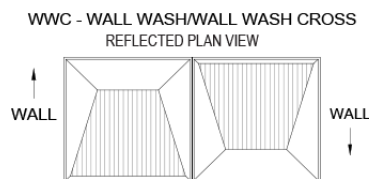


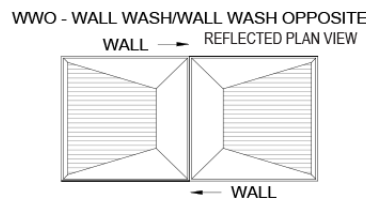


## The Core Family

Welcome to the Core line of fixtures. The family is filled with a rich diversity of options while keeping classic forms. This member of the family allows multiple combinations of wall wash orientations. Whether needing to simply double the light or wash adjacent or opposite walls, we suspect you will find the needed combination. This version is equipped with adjustable heads if a field tweak is required. With many source, driver, control and finish options, including wood, this wall wash delivers a 3.7:1 uniformity from top to bottom of the wall.

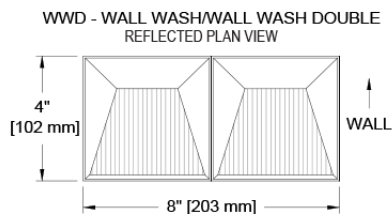

PROJECT:

TYPE:

SPECIFIER:

DATE:

### Key Points (CR4MWW-TMCA)

#### Trim

- 14 color options + custom RAL or wood available
- Plaster Mount allows installation from below with large plaster flange and lip
- Individual die cast aluminum or machined wood trim assembled to look as one contiguous multi cell fixture

#### Source / Optics

- Adjustable with 45° tilt and 358° rotation
- Wall wash achieves a uniform 3.7:1 ratio from top to bottom of 10' wall
- Over 4000 lumens delivered with both cells and C28 source selection
- <2 MacAdam Steps (<2SDCM) for fixed white
- 90 CRI, 60+ R9 Standard- 95 CRI 90+R9 Optional
- 2400K, 2700K, 3000K, 3500K, 4000K Ambient Dim, RGBW & Tunable White options
- Lifetime: L87B3>55,000 hours at 40°C Ambient

#### Housing

- 3 types of flangeless mounting options
- Heavy gauge aluminum for new construction or remodel
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring
- cULus Listed – Damp
- ETL 24 Compliant to JA8 with Airtight/IC Housing












#### Driver And Control

- Dimming to 0.1% available
- Prewired and integral to housing
- Flicker free to IEEE 1789-2015
- Phase, 0-10, DALI-2, DMX, Ecosystem or Wireless Control
- Universal 120-277v

Ordering Codes

PROJECT: SPECIFIER:  
DATE: TYPE: QUANTITY:

Ordering Code Example: CR4MWW-TMCA-Z-AU-WWO-C20-35-LD-2C-P14-LR

FIXTURE	TRIM	MOUNTING	CONFIGURATION	SOURCE / WATTS	CCT	DRIVER / CONTROL	CIRCUITS	TRIM FINISH	ACCESSORIES
CR4MWW-TMCA									
Core 4" Rectangular Multiple Adjustable Wall Wash - 2 Cell	Z Flangeless Trim	U Universal - Non IC*  AU Universal IC/Airtight*^  P Plaster - Non IC  AP Plaster IC/Airtight^  PM Panel Mount - Non IC*  APM Panel Mount Airtight/IC*^  ● California Title 24 Compliant *Precision cutout required ^Cannot be used with C28 source	WWD Wall Wash Double   WWO Wall Wash Opposite   WWR Wall Wash Right   WWL Wall Wash Left   WWC Wall Wash Cross   WWX Wall Wash Xcross   Note: Thumbnails are RCP view	Citizen  C14 ●● 15W 679Lm** 90+CRI, 60+R9  C20 21W 832Lm** 90+CRI, 60+R9  C28 30W* 1069Lm** 90+CRI, 60+R9 Ambient Dim™  A14 15W 461Lm** 95+CRI, 90+R9  A20 ●● 21W 858Lm 95+CRI, 90+R9 Tunable  RGBW 90+CRI, 60+R9  T14 90+CRI, 60+R9 Tunable White  T20 ●● 21W 1490Lm^ 90+CRI, 60+R9 Tunable White  ● California Title 24 Compliant to JA8.  * Requires Active Cooling and not compatible with IC/Airtight housing. Not compatible with L2 and LP drivers. ** Based on single cell.	24 2400K  27 2700K  30 3000K  35 3500K  40 4000K Ambient Dim™  2722 * 2700-2200K *A14 Only  3019 3000-1900K  3022 * 3000-2200K *A14 Only Tunable  TW1840 1800-4000K Tunable White w/ E1, E2, E3, E4  TW2765 2700-6500K Tunable White w/ E1, E2, E3, E4  RG1280 1200-8000K RGBW Dynamic Color Changing *Requires E2 or E4	C1 0-10 1.0%, UNV (120-277V) linear  C2 ELV/Triac 1.0%, (120V) linear  E1 0-10 0.1%, UNV (120-277V) log  E2 DALI-2 0-10 0.1%, UNV (120-277V) log  E3 0-10 0.1%, UNV (120-277V) linear  E4 ^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX ^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS  Lutron  LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1  LP Digital Ecosystem* 0.1%, UNV (120V) ECO Premier Hi-Lume SoftOn/Fade-to-Black, PEQ0, 20W max * Not compatible with C28	1C 1 Circuit  2C 2 Circuit	W White Paint   B Black Paint   D Wood*   PXX Specialty Paint Color* P01-P15   C Custom/RAL Color**   * Wood "D" selection to be used with Z trim and PM mounting - Refer to Wood Trim Guide ** Refer to Finish Guide  FINISH GUIDE LINK  WOOD TRIM GUIDE	EM Emergency Pack  CP Chicago Plenum  Controls  LR Lutron Wireless RF PowPak  ATH Lutron Athena Wireless Node Must be used with E2 driver  CA Casambi Wireless BLE to be paired with driver




# Ceiling Cutouts and Dimensions

Wall Wash Double configuration is shown. All other configurations exhibit the same cutouts and dimensions.

## 2 Cell Flangeless Housing

### Plaster Mount (P/AP)



(CR4MWW-TMCA-2-Z-P/AP)

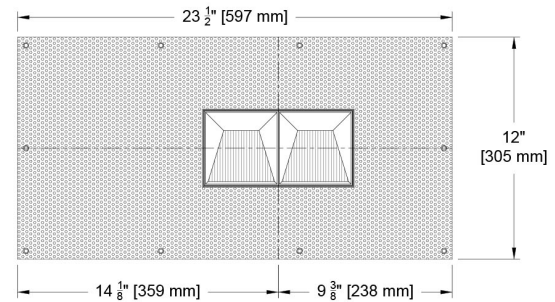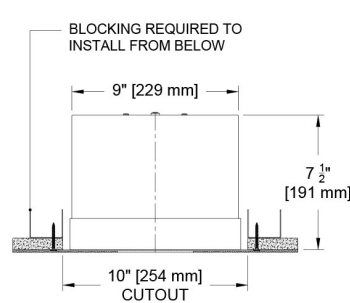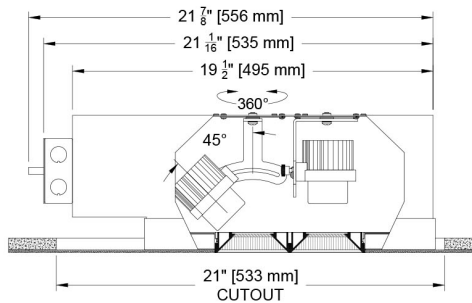


## 2 Cell Flangeless Housing

### Flangeless Mount (U/AU)



(CR4MWW-TMCA-2-Z-U/AU)

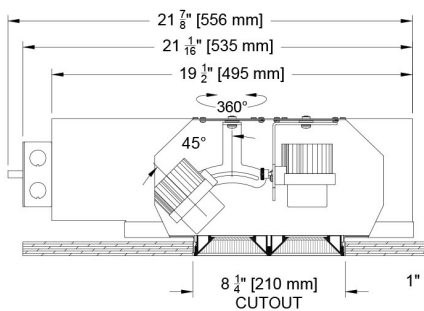

NOTE: This option is intended for use with precise and finished cutouts. There is no plaster or finish flange.





## Hanger Bar Detail





## 2 Cell Flangeless Housing

### Panel Mount (PM/APM)


(CR4MWW-TMCA-2-Z-PM/APM)

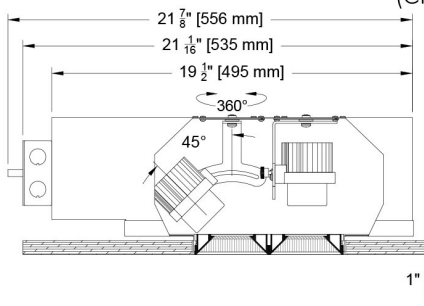

NOTE: This option is intended for use with precise and finished cutouts - usually millwork or wood ceilings. There is no plaster or finish flange.




## Panel Mount Detail

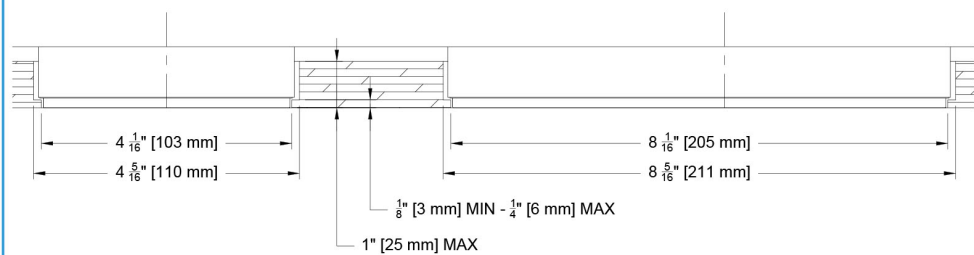


Photometric Table

All data is based from goniometer measurements of production representative single cell fixture. Multiple cells will deliver additional light and will need to be accounted for individually, including selected orientation, in calculations. All lumen values can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT

RECTANGULAR (2 Cell) Wall Wash (CR4WW-TMCA)			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt
Citizen C14	14	679	49
Citizen C20	21	832	40
Citizen C28*	30	1069	35
Ambient Dim A14	15	461	31
CCT Multiplier			
CCT	Citizen		
2700	0.95		
3000	1.00		
3500	1.02		
4000	1.03		
All measurements are delivered or derived delivered lumens at 3000k . For other CCTs use the following multipliers: 2700 - 0.95, 3500 - 1.02, 4000, 1.03. Values are based on a single head Core 4" square wall wash (CR4WW-SF). Multiple heads will deliver more light and will need to be accounted for individually in calculations. Ambient Dim measured at full output. *C28 requires active cooling and NIC housing			

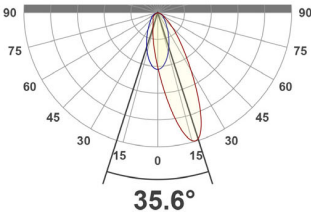

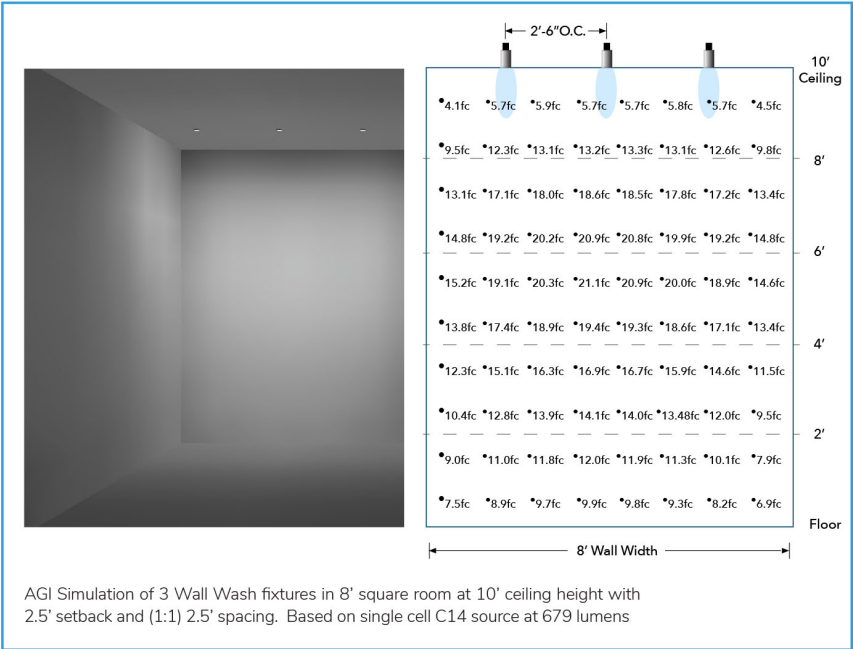

Color Data

All data is based from goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT


Citizen Sources for C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1



Ambient Dim 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

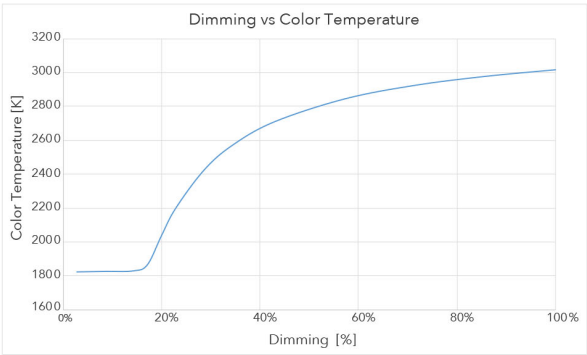

3000 CCT Full Output



## Tunable White and RGBW

Color and flux information available upon request