







Core 4" Rectangular Multiple Fixed Wall Wash - 2 Cell

Formerly known as 1240WW

Recessed Fixed Multiple Aperture (Cell)

The Core Family

Welcome to the Core line of fixtures. The family is filled with a rich diversity of options while keeping classic forms. This member of the family allows multiple combinations of wall wash orientations. Whether needing to simply double the light or wash adjacent or opposite walls, we suspect you will find the needed combination. With many source, driver, control and finish options, including wood, this wall wash delivers a 3.7:1 uniformity from top to bottom of the wall.

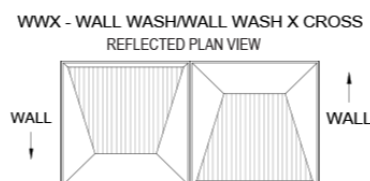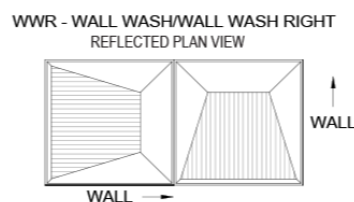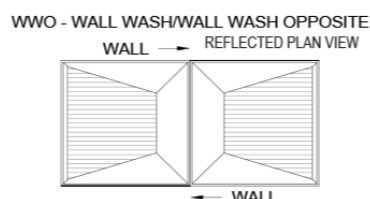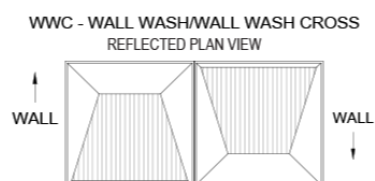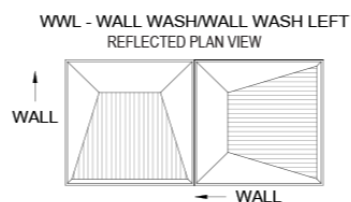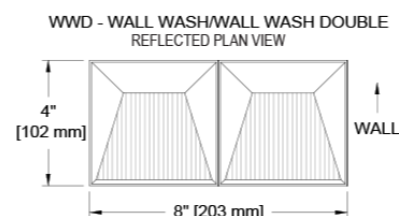

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CR4MWW-TMCF)

Trim

- 14 color options + custom RAL or wood available
- Plaster Mount allows installation from below with large plaster flange and lip
- Individual die cast aluminum or machined wood trim assembled to look as one continuous multi-cell fixture

Source / Optics

- Wall wash achieves a uniform 3.7:1 ratio from top to bottom of 10' wall
- Over 2000 lumens delivered with both cells and C28 source selection
- <2 MacAdam Steps (<2SDCM) for fixed white
- 90 CRI , 60+ R9 Standard- 95 CRI 90+R9 Optional
- 2400K, 2700K, 3000K, 3500K, 4000K Ambient Dim, RGBW & Tunable White options

Housing

- 3 types of flangeless mounting options
- Heavy gauge aluminum for new construction or remodel
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring
-  Listed – Damp
-  Compliant to  with Airtight/IC Housing

Driver

- TruPhase™ Dimming to 0.1% available
- Prewired and integral to housing
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control
- Universal 120-277v

Ordering Codes

PROJECT:






SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: CR4MWW-TMCF-Z-AU-WWO-C20-35-LD-2C-P14-LR

FIXTURE	TRIM	MOUNTING	CONFIGURATION	SOURCE / WATTS	CCT	DRIVER / CONTROL	CIRCUITS	TRIM FINISH	ACCESSORIES
CR4MWW-TMCF									
Core 4" Rectangular Multiple Fixed Wall Wash - 2 Cell	Z Flangeless Trim	U Universal - Non IC AU Universal IC/Airtight^ P Plaster - Non IC AP Plaster IC/Airtight^ PM Panel Mount - Non IC APM Panel Mount Airtight/IC^ California Title 24 Compliant ^Not compatible with C28 source	WWD Wall Wash Double  WWO Wall Wash Opposite  WWR Wall Wash Right  WWL Wall Wash Left  WWC Wall Wash Cross  WWX Wall Wash Xcross  Note: Thumbnails are RCP view	Citizen C14 15W 679Lm** 90+CRI, 60+R9 C2021W 832Lm** 90+CRI, 60+R9 C2830W* 1069Lm** 90+CRI, 60+R9 Ambient Dim™ A1415W 461Lm** 95+CRI, 90+R9 A20 21W 858Lm 95+CRI, 90+R9 Tunable T1490+CRI, 60+R9 Tunable White T20 21W 1490Lm^ 90+CRI, 60+R9 Tunable White RGBW90+CRI, 60+R9 California Title 24 Compliant to JA8 * Requires Active Cooling and not compatible with IC/Airtight housing. Not compatible with L2 and LP drivers. ** Based on single cell	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K Tunable TW1840 1800-4000K Tunable White w/ E1, E2, E3, E4 TW2765 2700-6500K Tunable White w/ E1, E2, E3, E4 RG1280 1200-8000K RGBW Dynamic Color Changing *Requires E2 or E4 Ambient Dim™ 2722* 2700-2200K *A14 Only 3019 3000-1900K 3022 * 3000-2200K *A14 Only	C1 0-10 1.0%, UNV (120-277V) linear C2 ELV/Triac 1.0%, (120V) linear E1 0-10 0.1%, UNV (120-277V) log E2 DALI-2 0.1%, UNV (120-277V) log E3 0-10 0.1%, UNV (120-277V) linear E4 ^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX ^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1 TR2 TruPhase™ 0.1%, (100-277V) Up to 20W Forward and Reverse compatible Phase Dimming 2 Dimming Curves: Linear/Logarithmic Static White & Ambient Dim only * Not compatible with C28	1C 1 Circuit 2C 2 Circuit	W White Paint  B Black Paint  D Wood*  PXX Specialty Paint Color* P01-P15  C Custom/RAL Color**  * Wood "D" selection to be used with Z trim and PM mounting - Refer to Wood Trim Guide ** Refer to Finish Guide FINISH GUIDE LINK WOOD TRIM GUIDE	EM Emergency Pack CP Chicago Plenum Controls LR Lutron Wireless RF PowPak ATH Lutron Athena Wireless Node Must be used with E2 driver CA Casambi Wireless BLE to be paired with driver

Core 4" Rectangular Multiple Fixed Wall Wash - 2 Cell

Formerly known as 1240WW

Recessed Fixed Multiple Aperture (Cell)




Ceiling Cutouts and Dimensions

Wall Wash Double configuration is shown. All other configurations exhibit the same cutouts and dimensions.

2 Cell Flangeless Housing

Plaster Mount (P/AP)



(CR4MWW-TMCF-2-Z-P/AP)

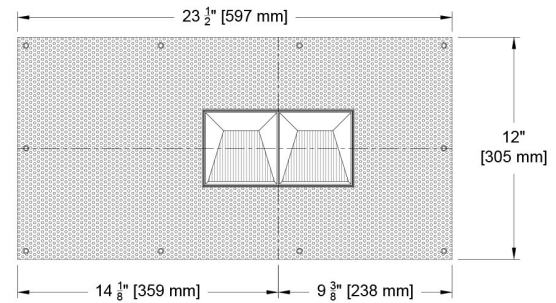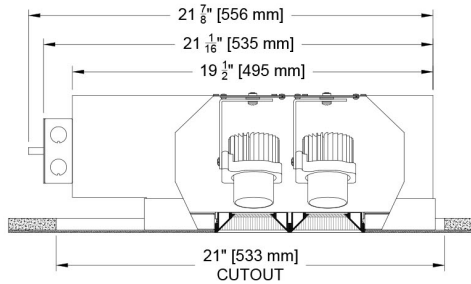


2 Cell Flangeless Housing

Flangeless Mount (U/AU)




(CR4MWW-TMCF-2-Z-U/AU)

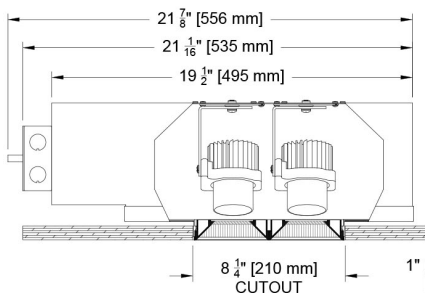

NOTE: This option is intended for use with precise and finished cutouts. There is no plaster or finish flange.





Hangar Bar Detail

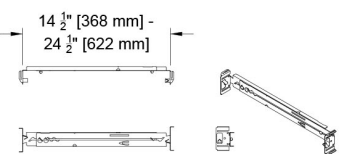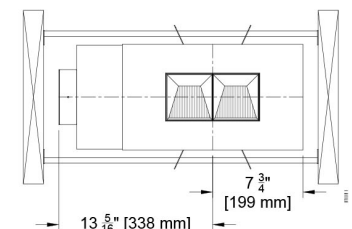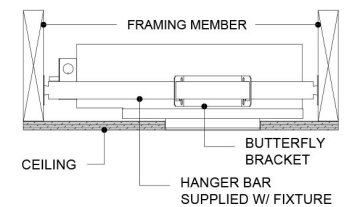


2 Cell Flangeless Housing

Panel Mount (PM/APM)


(CR4MWW-TMCF-2-Z-PM/APM)

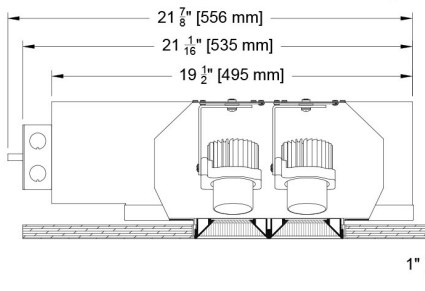

NOTE: This option is intended for use with precise and finished cutouts - usually millwork or wood ceilings. There is no plaster or finish flange.



Panel Mount Detail

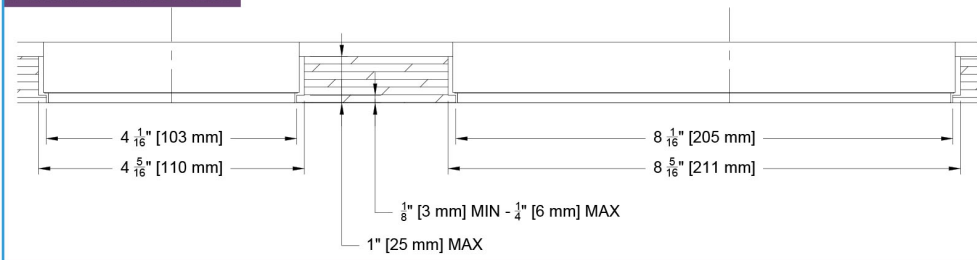

Core 4" Rectangular Multiple Fixed Wall Wash - 2 Cell


Formerly known as 1240WW
Recessed Fixed Multiple Aperture (Cell)




Photometric Table All data is based from goniometer measurements of production representative single cell fixture. Multiple cells will deliver additional light and will need to be accounted for along with selected orientation individually in calculations. All lumen values can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT

SQUARE Wall Wash (CR4WW-TMCF)			
Source	System watts (W)	Delivered Lumens (lm)	Lumens/ Watt
Citizen C14	14	679	49
Citizen C20	21	832	40
Citizen C28*	30	1069	35
Ambient Dim A14	15	461	31
CCT Multiplier			
CCT	Citizen		
2700	0.95		
3000	1.00		
3500	1.02		
4000	1.03		

All measurements are delivered or derived delivered lumens at 3000k . For other CCTs use the following multipliers: 2700 - 0.95, 3500 - 1.02, 4000, 1.03. Values are based on a single head Core 4" square wall wash (CR4WW-SF). Multiple heads will deliver more light and will need to be accounted for individually in calculations. Ambient Dim measured at full output. *C28 requires active cooling and NIC housing



A beam spread diagram showing a 35.6 degree beam angle. The diagram is a semi-circle with a vertical center line. The top edge is marked with 90, 75, 60, 45, 30, 15, 0, 15, 30, 45, 60, 75, 90. The beam angle is indicated by a line from the center to the edge, labeled 35.6°.

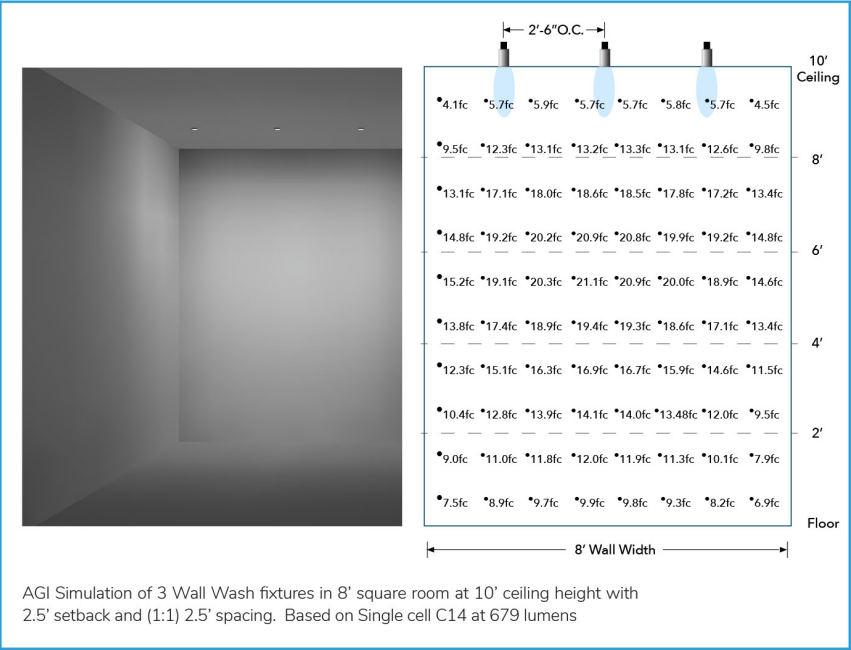


Color Data

All data is based from goniometer measurements of production representative product. All values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT.


Citizen Sources for C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

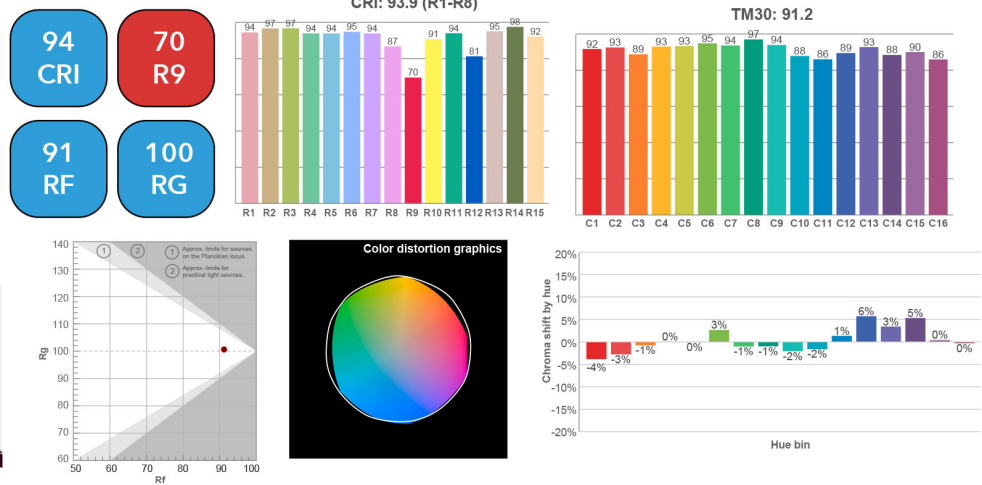


Ambient Dim 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

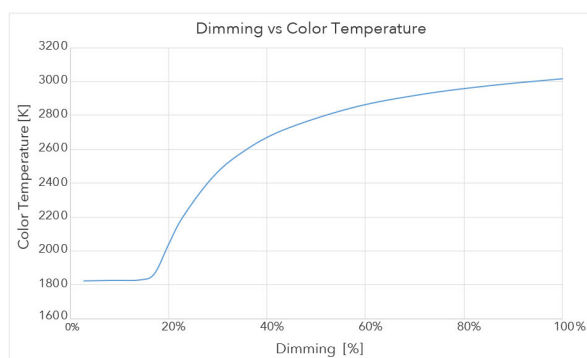

3000 CCT Full Output

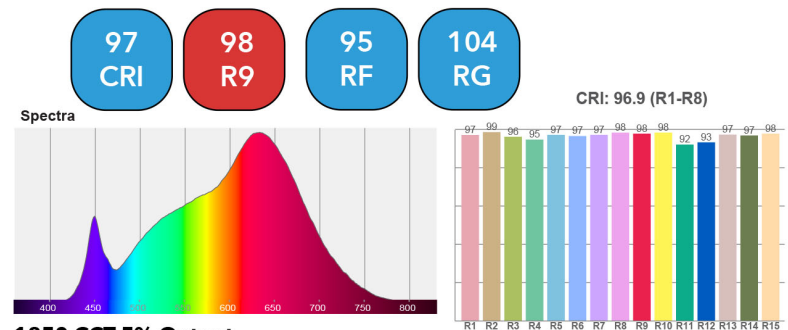

1850 CCT 5% Output

