

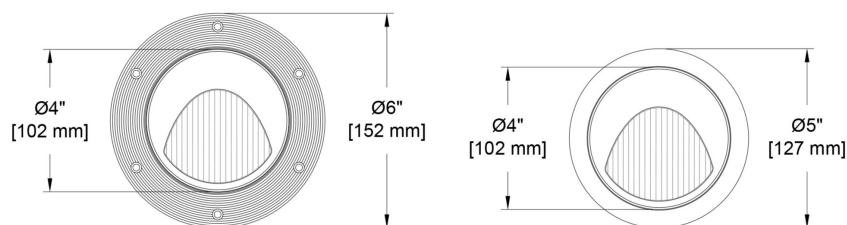


The Core Family

Welcome to the Core line of fixtures. You will find a rich diversity of technical and aesthetic options including 3 trim apertures, over 14 finishes including custom wood trims, flux and source selections featuring 90+ CRI fixed white and our world class Ambient Dim (Warm Dim), multiple beam spreads and plethora of driver and control choices. The Core adjustable wall wash is created on a platform allowing a high degree of modification, so if you don't see what you are looking for, just ask.

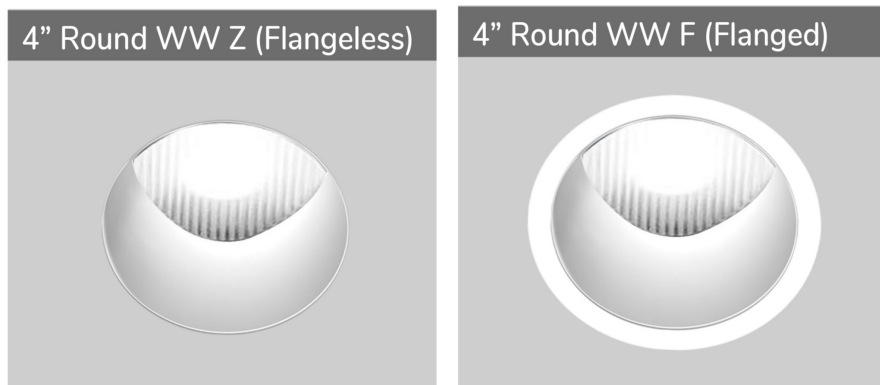

Wood Trim Available

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CR4WW-RA)




Trim

- Flanged or Flangeless
- Frosted Supertex borosilicate glass spread lens, hinged for source and driver service
- Flangeless includes plaster flange
- 14 color options + custom RAL or wood available
- One-piece die cast aluminum or machined wood trim

Source / Optics

- Lifetime: L87B3>55,000 hours at 40°C Ambient
- Uniform light from floor to ceiling. Achieves a 3.7:1 ratio on a 10' ceiling at 2.5' setback with a 1:1 on center spacing
- 2400K, 2700K, 3000K, 3500K, 4000K, Ambient Dim, RGBW & Tunable White options
- 90 CRI, 60+ R9 Standard- 95 CRI 90+R9 Optional
- <2 MacAdam Steps (<2SDCM) for fixed white
- Up to 2751 delivered lumens.
- Adjustable to 45° with 360° of rotation.

Housing

-  Compliant to  with Airtight Housing
-  Listed – Damp or wet with shower trim
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Heavy gauge aluminum for new construction or remodel

Driver

- Phase, 0-10, DALI-2, DMX, Ecosystem or Wireless Control
- Flicker free to IEEE 1789-2015
- Prewired and integral to housing
- Universal 120-277v

Ordering Codes

PROJECT: SPECIFIER:
DATE: TYPE: QUANTITY:

Ordering Code Example: CR4WW-RA-F-AU-C20-35-24-E2-P14-CA

| FIXTURE | TRIM | MOUNTING | SOURCE / WATTS | CCT | DRIVER / CONTROL | TRIM FINISH | ACCESSORIES |
|------------------------------------|--|--|---|---|---|---|--|
| CR4WW-RA | | | | | | | |
| Core 4" Round Adjustable Wall Wash | <div>Flanged Trims</div> <div>F Flanged Trim ~</div> <div>FS Flanged Shower Trim*</div> <div>(for mounting choose from Flanged Housings)</div> <div>Flangeless Trims</div> <div>Z Flangeless Trim</div> <div>ZS Flangeless Shower Trim*</div> <div>(for mounting choose from Flangeless Housings)</div> <div>*Aperture Lens Required</div> | <div>Flanged Housings</div> <div>U Universal - Non-IC Housing</div> <div>AU Universal IC/Airtight*</div> <div>Flangeless Housings</div> <div>P Plaster - Non-IC Housing</div> <div>AP Plaster IC/Airtight*</div> <div>PM Panel Mount</div> <div>APM Panel Mount Airtight/IC*</div> <div><div><div></div><div></div></div> Supports CA Title24 compliance</div> | <div>Citizen</div> <div>C14 15W 833Lm 90+CRI, 60+R9</div> <div>C20 20W 1056Lm 90+CRI, 60+R9</div> <div>C28 30W* 1616Lm* 90+CRI, 60+R9</div> <div>C32 35W 2751Lm* 90+CRI, 60+R9</div> <div>Tunable</div> <div>T9 90+CRI, 60+R9 Tunable White</div> <div>T15 90+CRI, 60+R9 Tunable White</div> <div>T20 90+CRI, 60+R9 Tunable White</div> <div>RGBW 15W 90+CRI, 60+R9</div> <div>Ambient Dim™</div> <div>A14 15W 578Lm 95+CRI, 90+R9</div> <div>A20 21W 1050Lm 90+CRI, 68+R9</div> <div><div><div></div><div></div></div> Supports CA Title 24 Compliance to JA8 except in flat aperture</div> <div>~See Photometrics chart for latest performance data</div> | <div>24 2400K</div> <div>27 2700K</div> <div>30 3000K</div> <div>35 3500K</div> <div>40 4000K</div> <div>Tunable</div> <div>TW1840 1800-4000K Tunable White w/ E1, E2, E3, E4</div> <div>TW2765 2700-6500K Tunable White w/ E1, E2, E3, E4</div> <div>RG1280 1200-8000K RGBW Dynamic Color Changing *Requires E2 or E4</div> <div>Ambient Dim™</div> <div>2722 2700-2200K *A14 Only</div> <div>3019 3000-1900K</div> <div>3022 3000-2200K *A14 Only</div> | <div>C1 0-10 1.0%, UNV (120-277V) linear</div> <div>C2 ELV/Triac 1.0%, (120V) linear</div> <div>E1 0-10 0.1%, UNV (120-277V) log</div> <div>E2 DALI-2 0.1%, UNV (120-277V) log</div> <div>E3 0-10 0.1%, UNV (120-277V) linear</div> <div>E4^ DMX 0.1%, UNV (120-277V) Universal DMX Driver/Controller RGBW-DMX ^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS</div> <div>Lutron</div> <div>LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1</div> <div>LP Digital Ecosystem* 0.1%, UNV (120-277V) ECO Premier Hi-Lume SoftOn/Fade-to-Black, PEQ0, 20W max</div> | <div>W White Paint</div> <div>B Black Paint</div> <div>D Wood*</div> <div>PXX Specialty Paint Color*</div> <div>P01-P15</div> <div>C Custom/RAL Color**</div> <div>* Wood "D" selection to be used with Z trim and PM mounting - Refer to Wood Trim Guide</div> <div>** Refer to Finish Guide</div> <div>FINISH GUIDE LINK</div> <div>WOOD TRIM GUIDE</div> | <div>EM Emergency Pack</div> <div>CP Chicago Plenum</div> <div>Controls</div> <div>LR Lutron Wireless RF PowPak</div> <div>ATH Lutron Athena Wireless Node Must be used with E2 driver</div> <div>CA Casambi Wireless BLE to be paired with driver</div> |


Ceiling Cutouts and Dimensions

Deep Regress Shown - others similar


Round Flangeless Housing

Plaster Mount (P/AP)

(CR4WW-RA-Z-P/AP)

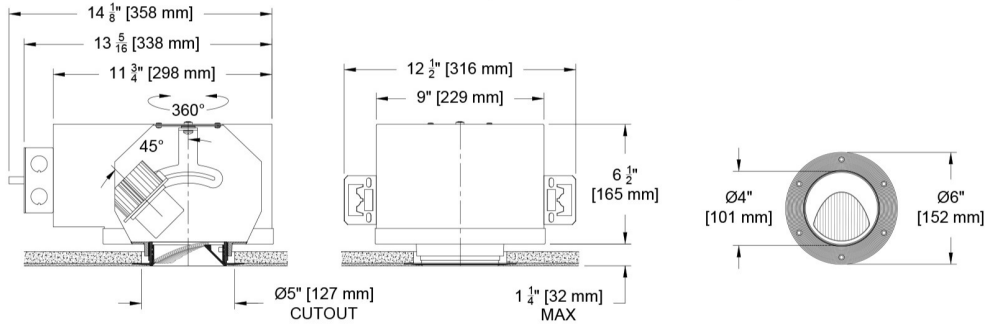



Hanger Bar Detail

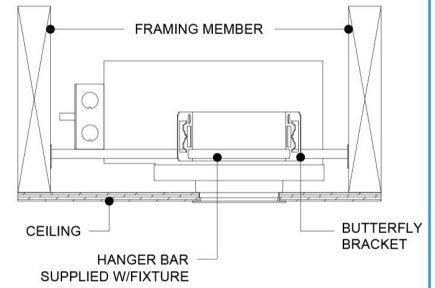

Round Flanged Housing

Flanged Mount (U/AUA)


(CR4WW-RA-F-U/AU)

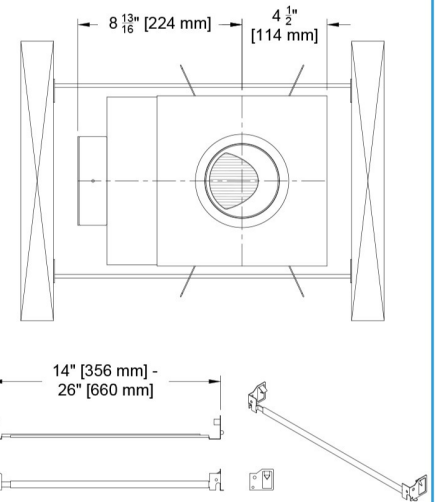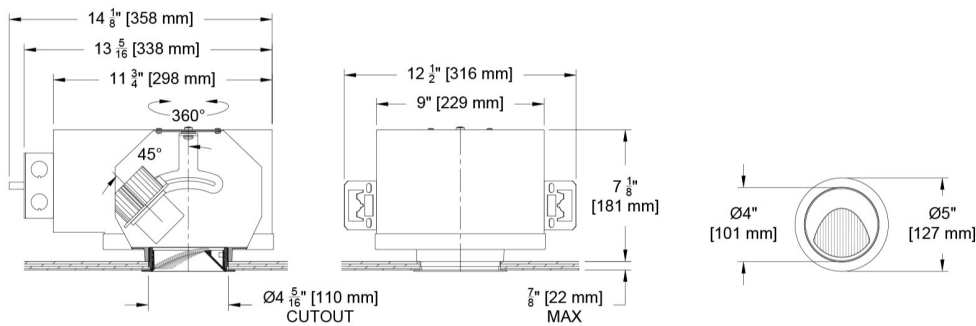


Round Flangeless Housing

Panel Mount (PM)


(CR4WW-RA-Z-PM)

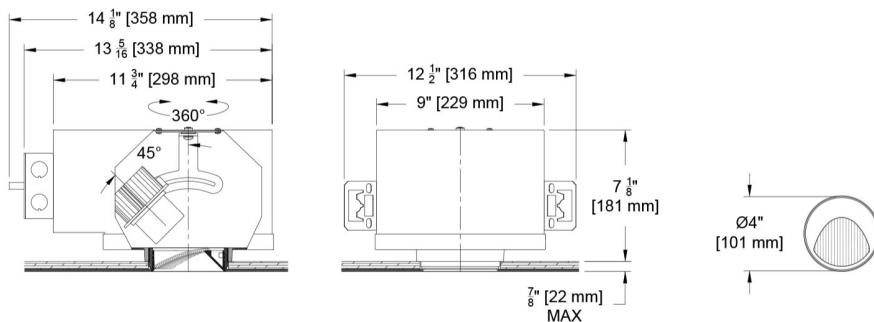


Panel Mount Detail

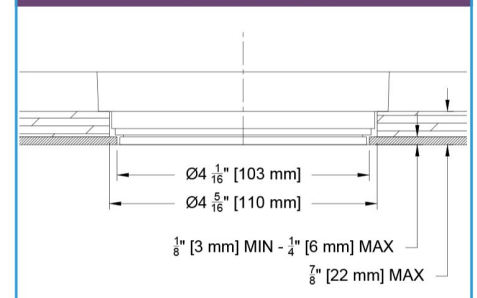

Photometric Table All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT
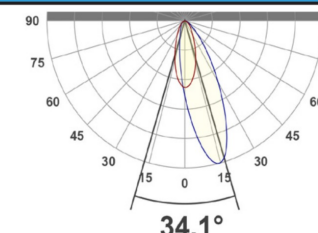
| ROUND WW (CR4WW-RA) Beamspreads | | 35.6° | | ISO CD Plot | | |
|------------------------------------|------------------|-----------------------|--------------|--|----------------|------|
| Source | System watts (W) | Delivered Lumens (lm) | Lumens/ Watt |  | CCT Multiplier | |
| Citizen C14 | 14 | 833 | 60 | | 2700 | .95 |
| Citizen C20 | 20 | 1056 | 53 | | 3000 | 1.00 |
| Citizen C28* | 31 | 1616 | 53 | | 3500 | 1.02 |
| Ambient Dim A14 | 14 | 578 | 40 | | 4000 | 1.03 |

All data based on 3000k. See Multipliers for other CCT. Ambient Dim based on 3000k at full output. *C28 requires active cooling and cannot be used with IC housing or Chicago Plenum

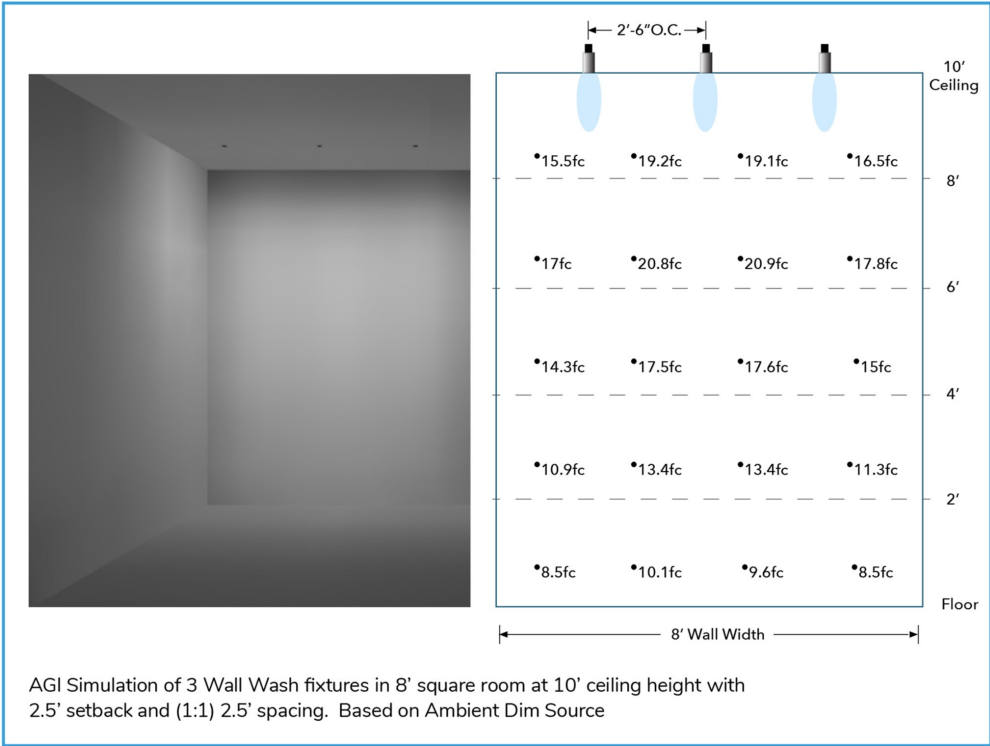


Color Data

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT


Citizen Sources - C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1

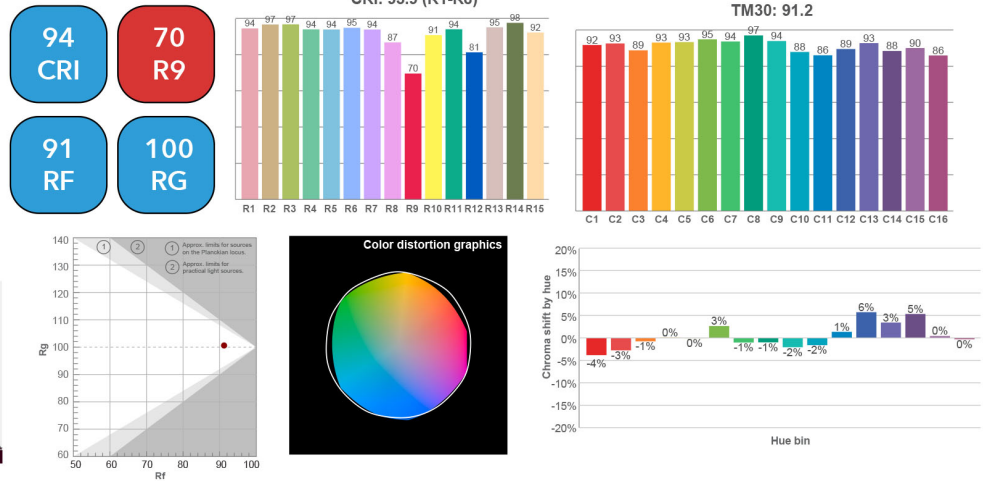


Ambient Dim - 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

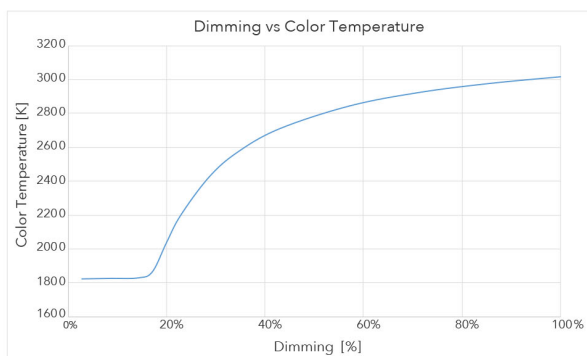

3000 CCT Full Output

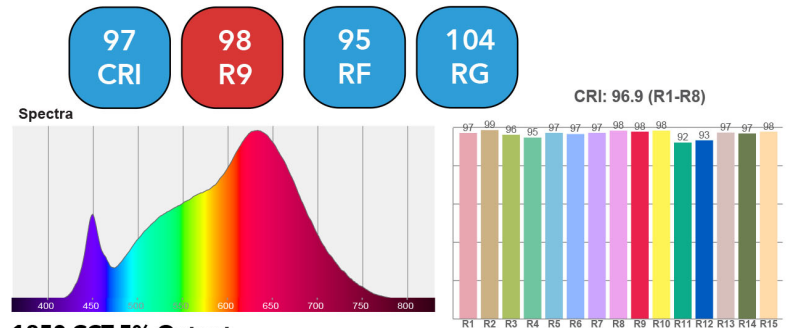

1850 CCT 5% Output

