



The Core Family

Welcome to the Core line of fixtures. You will find a rich diversity of technical and aesthetic options including 3 trim apertures, over 14 finishes including custom wood trims, flux and source selections featuring 90+ CRI fixed white and our world class Ambient Dim (Warm Dim), multiple beam spreads and plethora of driver and control choices. The Core adjustable wall wash is created on a platform allowing a high degree of modification, so if you don't see what you are looking for, just ask.

4" Round WW Z (Flangeless)

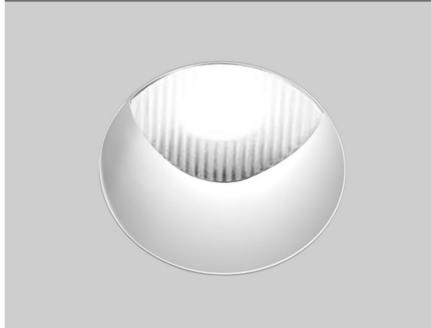

4" Round WW F (Flanged)

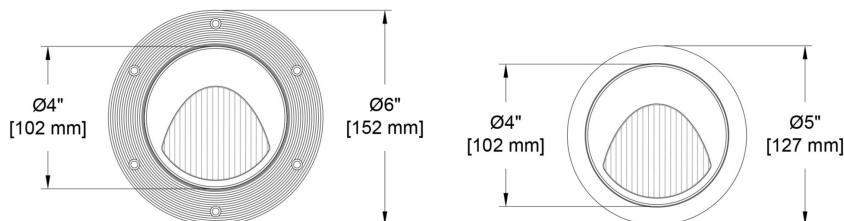

Wood Trim Available

PROJECT:

TYPE:

SPECIFIER:

DATE:

Key Points (CR4WW-RA)

Trim

- Flanged or Flangeless
- Frosted Supertex borosilicate glass spread lens, hinged for source and driver service
- Flangeless includes plaster flange
- 14 color options + custom RAL or wood available
- One-piece die cast aluminum or machined wood trim

Source / Optics

- Uniform light from floor to ceiling. Achieves a 3.7:1 ratio on a 10' ceiling at 2.5' setback with a 1:1 on center spacing
- 2400K, 2700K, 3000K, 3500K, 4000K, Ambient Dim, RGBW & Tunable White options
- 90 CRI, 60+ R9 Standard- 95 CRI 90+R9 Optional
- <2 MacAdam Steps (<2SDCM) for fixed white
- Up to 2751 delivered lumens.
- Adjustable to 45° with 360° of rotation.

Housing

- **TITLE 24** Compliant to **JAB** with Airtight Housing
-  Listed – Damp or wet with shower trim
- Approved for 8 (4-in / 4-out) #12 AWG conductors rated for 90°C through wiring
- IC Rated / Airtight Housing approved for use in direct contact with insulation – Chicago Plenum Available
- Heavy gauge aluminum for new construction or remodel

Driver

- TruPhase™, 0-10, DALI-2, DMX, Ecosystem or Wireless Control
- Flicker free to IEEE 1789-2015 available with EldoLED and TruPhase™ selections
- Prewired and integral to housing
- Universal 120-277v

Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: CR4WW-RA-F-AU-C20-35-24-E2-P14-CA

Fixture	Trim	Mounting	Source / Watts	CCT	Driver / Control	Trim Finish	Accessories
CR4WW-RA							

Core 4" Round Adjustable Wall Wash

Flanged Trims

- F** Flanged Trim ~
- FS** Flanged Shower Trim*
(for mounting choose from Flanged Housings)

Flangeless Trims

- Z** Flangeless Trim
- ZS** Flangeless Shower Trim*
(for mounting choose from Flangeless Housings)

*Aperture Lens Required

Flanged Housings

- U** Universal - Non-IC Housing
- AU** Universal IC/Airtight*

Flangeless Housings

- P** Plaster - Non-IC Housing
- AP** Plaster IC/Airtight*
- PM** Panel Mount
- APM** Panel Mount Airtight/IC*

Citizen

- C14** 15W 833Lm 90+CRI, 60+R9
- C20** 20W 1056Lm 90+CRI, 60+R9
- C28** 30W* 1616Lm* 90+CRI, 60+R9
- C32** 35W 2751Lm* 90+CRI, 60+R9

Tunable

- TW1840** 1800-4000K Tunable White w/E1, E2, E3, E4
- TW2765** 2700-6500K Tunable White w/E1, E2, E3, E4
- T9** 90+CRI, 60+R9 Tunable White
- T15** 90+CRI, 60+R9 Tunable White
- T20** 90+CRI, 60+R9 Tunable White
- RGBW** 15W 90+CRI, 60+R9

Ambient Dim™

- A14** 15W 578Lm 95+CRI, 90+R9
- A20** 21W 1050Lm 90+CRI, 68+R9

Supports CA Title 24 compliance

Supports CA Title 24 Compliance to JA8 except in flat aperture

See Photometrics chart for latest performance data

24 2400K

27 2700K

30 3000K

35 3500K

40 4000K

Tunable

0.1%, UNV (120-277V) linear

C1 0-10 1.0%, UNV (120-277V) linear

C2 ELV/Triac 1.0%, (120V) linear

E1 0-10 0.1%, UNV (120-277V) log

E2 DALI-2 0.1%, UNV (120-277V) log

E3 0-10 0.1%, UNV (120-277V) linear

E4 DMX 0.1%, UNV (120-277V) linear

RG1280 1200-8000K RGBW Dynamic Color Changing

^ INCLUDES DMX/RDM COMPATIBLE DRIVER WITH BUILT-IN DECODER - CONTROLLER BY OTHERS

Ambient Dim™

2722 2700-2200K *A14 Only

3019 3000-1900K

3022 3000-2200K *A14 Only

LD Digital Ecosystem 1.0%, UNV (120-277V) ECO Hi-Lume SoftOn/Fade-to-Black LDE1

TR2 Phase 0.1%, (120-120V) log TruPhase™ Up to 20W

Forward and Reverse compatible Phase Dimming

Static White & Ambient Dim only

W White Paint

B Black Paint

D Wood*

PXX Specialty Paint Color*
P01-P15

C Custom/RAL Color**

* Wood "D" selection to be used with Z trim and PM mounting - Refer to Wood Trim Guide

** Refer to Finish Guide

FINISH GUIDE LINK

WOOD TRIM GUIDE

EM Emergency Pack

CP Chicago Plenum Controls

LR Lutron Wireless RF PowPak

ATH Lutron Athena Wireless Node
Must be used with E2 driver

CA Casambi Wireless BLE to be paired with driver


Ceiling Cutouts and Dimensions

Deep Regress Shown - others similar

Round Flangeless Housing

Plaster Mount (P/AP)


(CR4WW-RA-Z-P/AP)

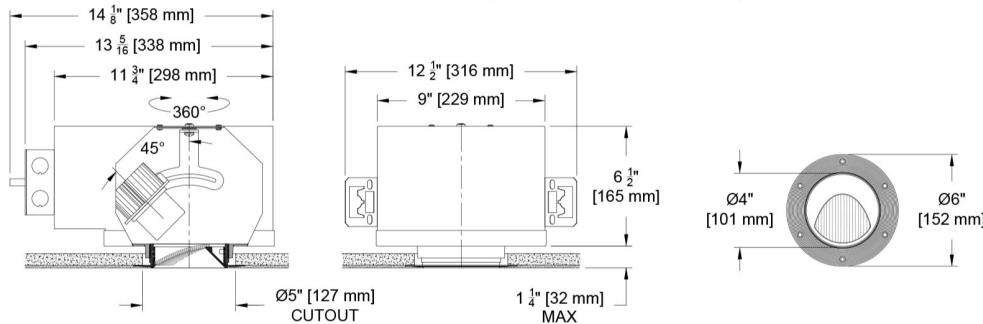



Round Flanged Housing

Flanged Mount (U/AUA)

(CR4WW-RA-F-U/AU)

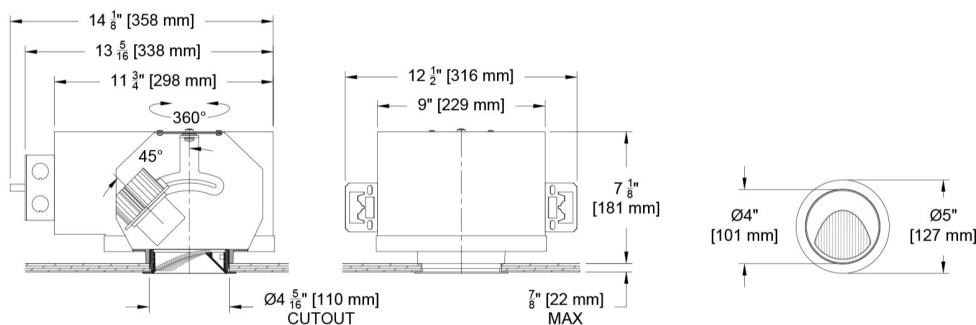


Hanger Bar Detail

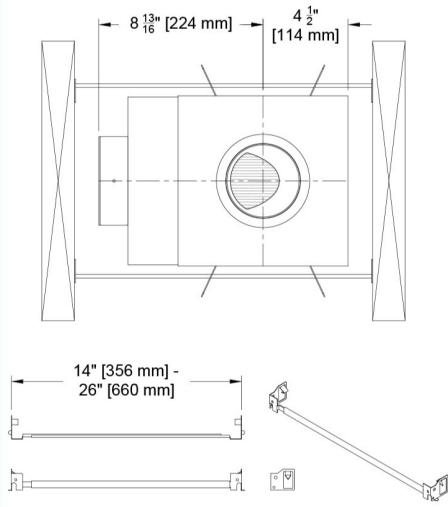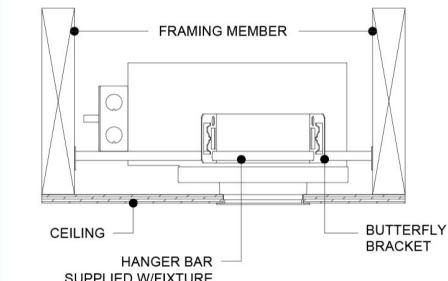


Round Flangeless Housing

Panel Mount (PM)

(CR4WW-RA-Z-PM)

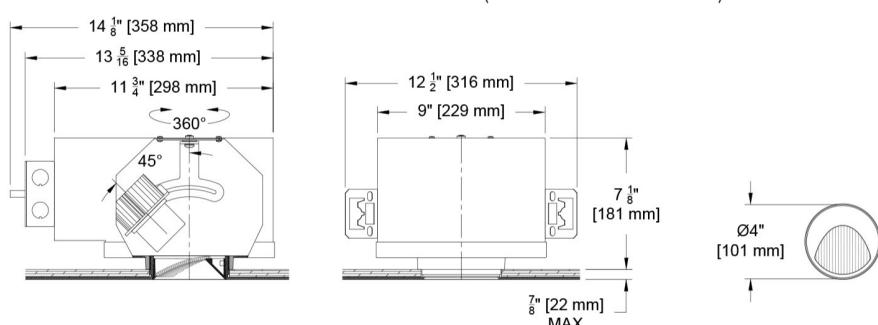


Panel Mount Detail

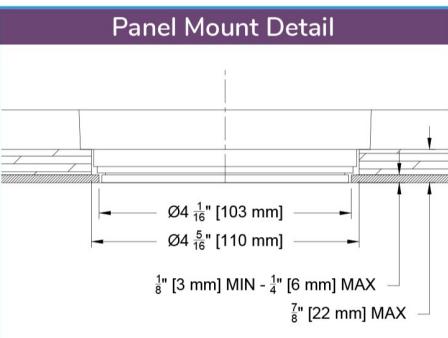


Photometric Table

All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated flux range. Measurements at 3000 CCT

ROUND WW (CR4WW-RA) Beamspreads		35.6°		ISO CD Plot		
Source	System watts (W)	Delivered Lumens (lm)	Lumens/Watt			CCT Multiplier
Citizen C14	14	833	60	 34.1°	2700	.95
Citizen C20	20	1056	53		3000	1.00
Citizen C28*	31	1616	53		3500	1.02
Ambient Dim A14	14	578	40		4000	1.03

All data based on 3000k. See Multipliers for other CCT. Ambient Dim based on 3000k at full output. *C28 requires active cooling and cannot be used with IC housing or Chicago Plenum

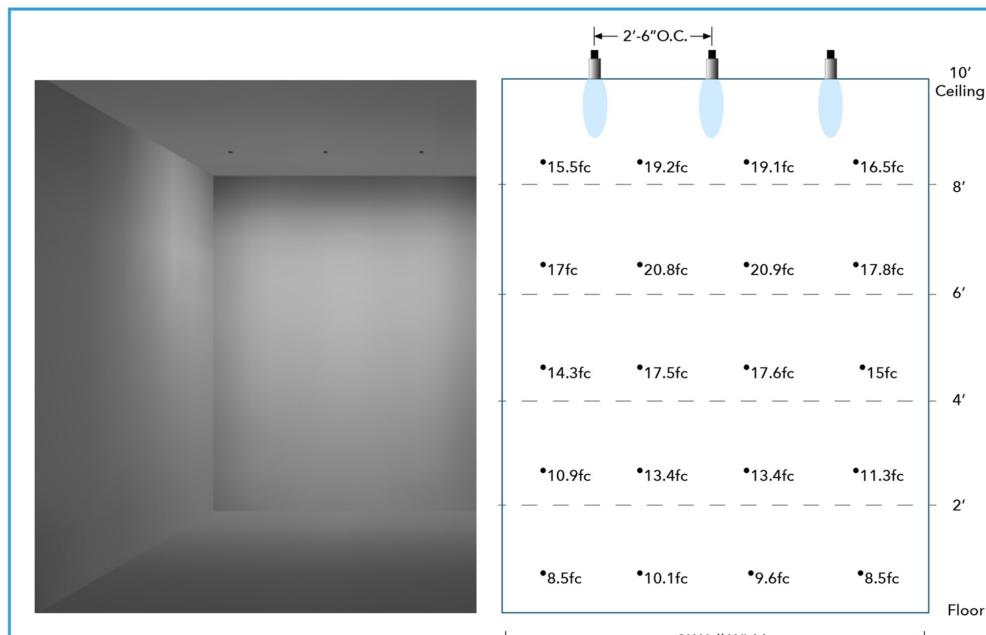

AGI Simulation of 3 Wall Wash fixtures in 8' square room at 10' ceiling height with 2.5' setback and (1:1) 2.5' spacing. Based on Ambient Dim Source






Color Data

Citizen Sources - C14, C20 and C28

- <2 MacAdam Ellipse (<2 SDCM)
- 90+ CRI and RF
- 60+R9, Hue Bin 1




All data is based from goniometer measurements of production representative product. All lumen values can vary +/- 10% from LED manufacturer rated data range. Measurements at 3000 CCT

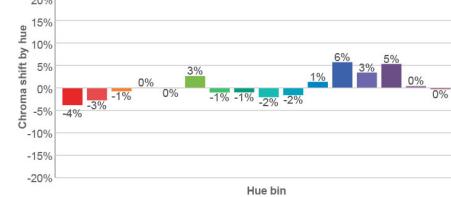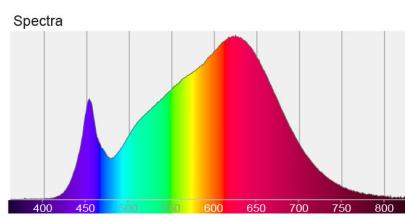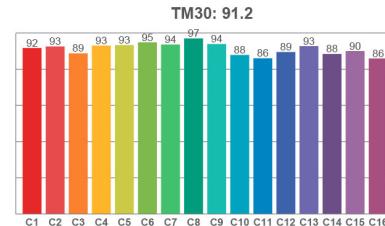


Ambient Dim - 3000k to 1900k

- <3 MacAdam Ellipse (<3 SDCM)
- 95+ CRI and RF
- 90+R9, Hue Bin 1
- Follows Black Body Locus through dimming range

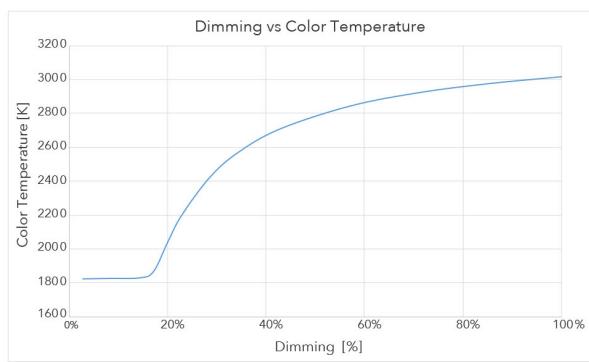

3000 CCT Full Output

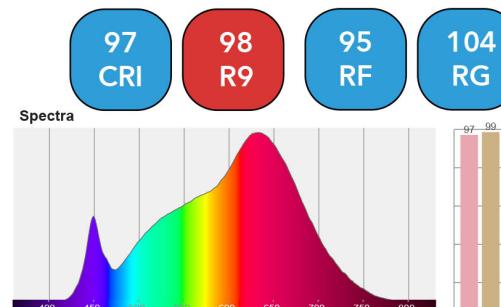

1850 CCT 5% Output

