



# The Slice Family

Illuminate your space with precision thin Slices of homogeneous light. The Slice family offers linear 1" and 2" wide profiles in recessed and below ceiling options in lensed and multi-cell configurations. The 1" lensed surface fixture delivers over 630 lumens per foot with a modular design allowing continuous homogenous light to your specified length. The Lambertian type distribution of ~100° is perfect as a general continuous linear illumination device. You have found the 2" lensed surface mounted Slice and we hope you enjoy the details.

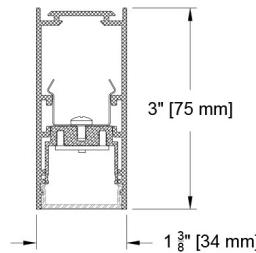

PROJECT:

TYPE:

SPECIFIER:

DATE:

## Key Points (SL1DC-LFSF)

### Source Optics

- Up to 633 lm/ft available
- Over 65 lumens per watt per foot
- TITLE 24 Fixture photometrics support CA Title 24 part 6 compliance meeting requirements of JA8
- Even illumination with wide (~100°) lambertian type distribution
- 1' minimum board length. Depending on specified length, ends may have unlit area. Request submittal drawing if definition is required
- CCT offerings - 2700k, 3000k, 3500k and 4000k
- 90+ CRI and 50+ R9

### Housing

- Specify to desired length for even continuous light
- 14 color options + Custom and RAL# available
- Lengths longer than 8' are assembled in field with supplied joiners
- D Damp listed

### Driver And Control

- Universal 120v to 277v
- Flicker Free to IEEE 1789-2015 (no effect to low risk)
- 0.1% dimming available in 0-10 or DALI-2 protocols
- Remote driver mounting required. See electrical guide for wire length guidance.

Lumens per Foot Photometrics				
1" Slice Linear Lensed	Performance / Foot			
Source	System watts Watt/ft	Delivered Lumens (lm/ft)	Lumens/ Watt/ft	Peak cd
F4	5	317	66	125
F8	10	633	66	215

# Ordering Codes

PROJECT:

SPECIFIER:

DATE:

TYPE:

QUANTITY:

Ordering Code Example: SL1DC-LFSF-SM-450"-F8-30-SY2-P16

Fixture	Mounting	Length	Source / Watts	CCT	Driver / Control	Housing Finish	Accessories
SL1DC-LFSF	SM Surface Mount	Specify exact length in inches* <sup>a</sup>  *Minimum board length of 12"  ^Minimum of 24 inches required for integral driver  Note: Depending on length specified, ends may have unlit area. Please request submittal drawing if unlit area definition is required.	<p><b>F4</b>  5W 317Lm 90+CRI, 50+R9 values per foot</p> <p><b>F8</b>  10W 633Lm 90+CRI, 50+R9 values per foot</p> <p>● Supports CA Title 24 part 6 compliance meeting JA8 requirements</p>	<p>27 2700K</p> <p>30 3000K</p> <p>35 3500K</p> <p>40 4000K</p>	<p><b>SY1</b> 0-10 1.0%, UNV (120-277V) linear</p> <p><b>SY2</b> 0-10 1.0%, UNV (120-277V) log</p> <p><b>EldoLED</b></p> <p><b>E1</b> 0-10 0.1%, UNV (120-277V) log</p> <p><b>E2</b> DALI-2 0.1%, UNV (120-277V) log</p> <p><b>E3</b> 0-10 0.1%, UNV (120-277V) linear</p> <p>Note: Remote mounting required. See electrical guide for remote wiring distances</p>	<p><b>Standard</b></p> <p><b>B</b> Black Paint </p> <p><b>Optional</b></p> <p><b>W</b> White Paint </p> <p><b>PXX</b> Specialty Paint Color* </p> <p><b>W</b> White Paint </p> <p><b>C</b> Custom/RAL* </p>	<p>CP Chicago Plenum</p>

 ELECTRICAL GUIDE LINK

\*See Finish Guide




# Ceiling Cutouts and Dimensions

SL1DC - Lensed Surface Mount

Minimum 2' length. Minimum board length of 12". Depending on length specified, ends may have unlit area. Request submittal drawing if unlit end area definition is required.


SM

(SL1DC-LFSF-)

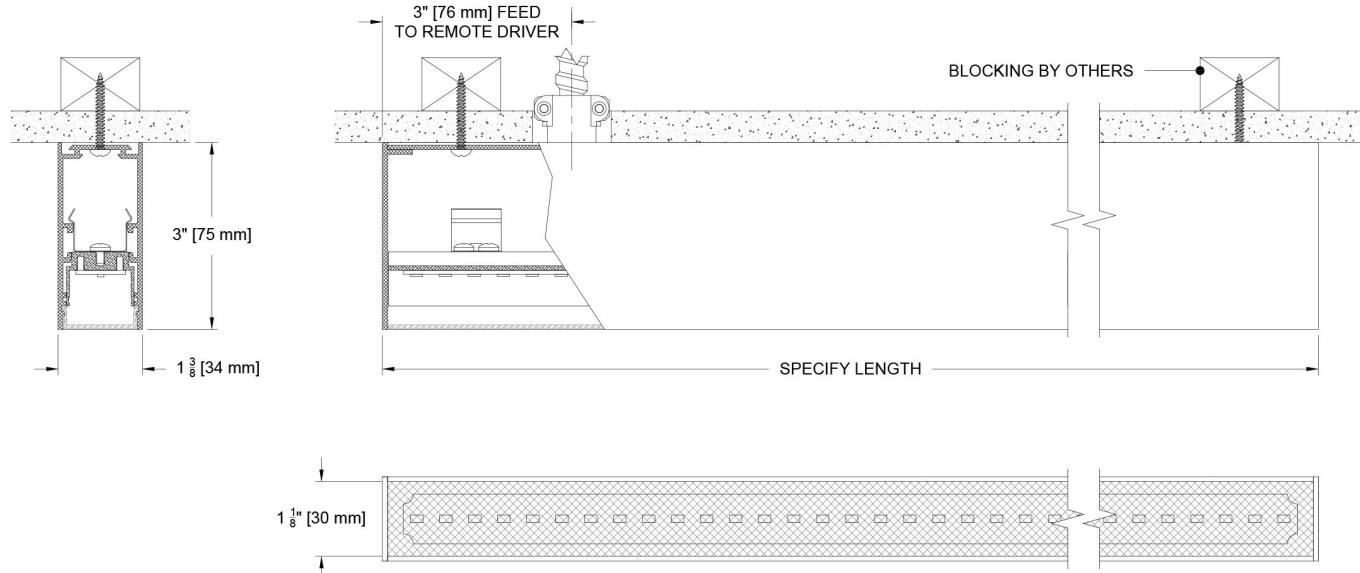

## Remote Driver Enclosure

REMOTE MOUNTING REQUIRED

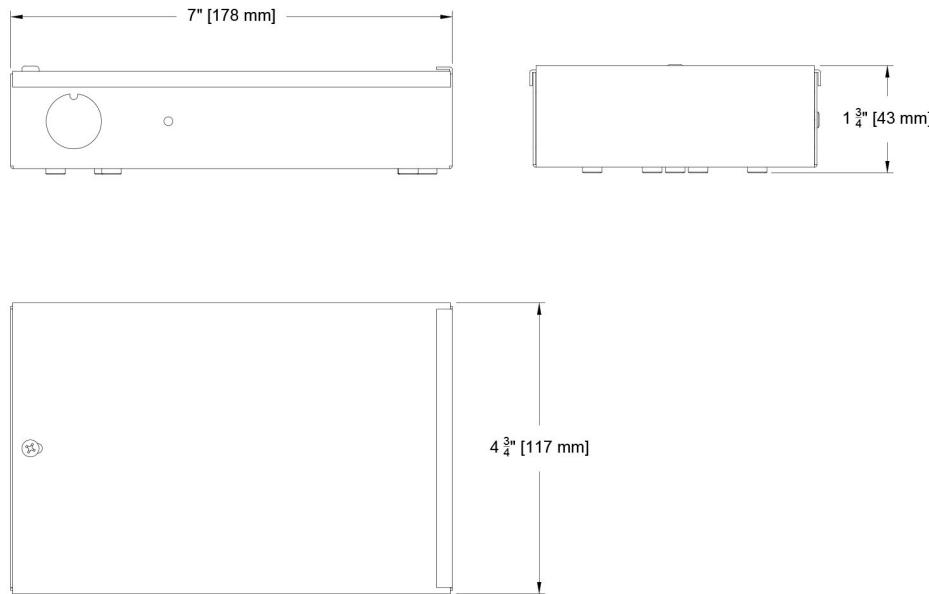

# Photometric Table


Values are per foot. All flux measurements are delivered lumens based on 3000K and 1' (ft) length from production representative product. Flux can vary +/- 10% from source manufacturers rated flux range. Measurements taken with standard lens in a black housing. System watts are based typical source datasheet power values + 20% driver losses. Efficacy values will vary based on length and driver load.

Lumens per Foot Photometrics				
1" Slice Linear Lensed		Performance / Foot		
Source	System watts Watt/ft	Delivered Lumens (lm/ft)	Lumens/ Watt/ft	Peak cd
F4	5	317	66	125
F8	10	633	66	215

CCT Multiplier		Beam angle
CCT	Citizen	
2700	0.96	
3000	1.00	
3500	1.03	
4000	1.04	

ISO CD plot based on F8 source.

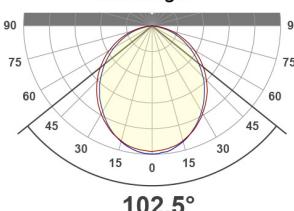

102.5°

## Color Data

### F8 and F4 Linear Board

- <3 MacAdam Ellipse (<3 SDCM)
- 90+ CRI and RF
- 50+R9, Hue Bin 1 and 16

